SINCE 1981

IS09001:2008

PAH

REACH

FLYWHEEL

GUANGDONG YANGJIANG FLYWHEEL CASTER MANUFACTURING LTD.

ADD：NO. 1 CHIGANG EAST ROAD, YANGJIANG,
GUANGDONG, CHINA

TEL ：86-662-3350833

FAX ：86-662-3300869

www.asiaflywheel.com

E-mail：Flywheel@asiaflywheel.com

FLYWHEEL

CASTERS AND WHEELS

Catalogue issue F8

ASIA FLYWHEEL

CNAS

CNAS C065-Q

MEMBER OF MULTILATERAL RECOGNITION ARRANGEMENT IAF

www.tuv.com TÜV

GS geprüfte Sicherheit

FLYWHEEL

ASIA FLYWHEEL

COMPANY PROFILE

Flywheel Caster Manufacturing Ltd., established in 1981, which is located in Yangjiang city, Guangdong of China, with 168,000 square-meter beautiful scenery factory.

We pay great attention to the quality. We are the first to be ISO 9001:2008 certified in this industry in 2001. All of our products go through 5,000 brake test and load capacity test conforms to the caster standard EN 12531.And they are subjected to salt-spray and finish treatment testing to ensure high corrosion-resistance.

Now it already has become a professional caster company which integrates design, manufacture, assemble, inspection and exportation.

Our 20 R&D team can work with you on your drawings or special requirements. 360 sets of equipments and 600 workers ensure our monthly output 3 million pcs. The incoming, processing and final inspection can guarantee the good quality products. 90% of our products are exported to Europe and America, our turnover of 2013 is USD 30,000,000.

Our wheel diameter is from 15mm to 300mm, materials include rubber, TPR, PU, plastic, nylon, cast iron, pneumatic, phenolic and sandwich, etc. Our housings have special sizes for different areas, such as Euro type, American type, and the popular type. Casters are more than 50 series, 1000 types for customers' choices and wide different usage, such as, for industrial machine, medical facility, furniture, trolley, shopping cart, forklift, scaffold, shelf, etc.

Welcome to our company to know more about us!

Playing court

Brake function test machine

Salt spray test machine

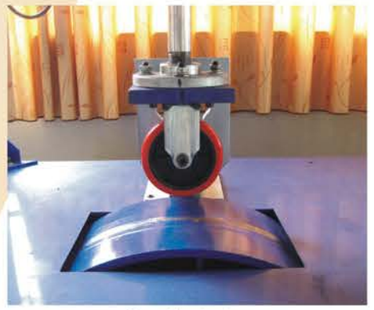

Running test

Load test machine

Show room

Corner of factory

Show room

Outer scene of plant B

Outer scene of workshop

Injection workshop

Outer Scene of plant A

Stamping workshop

Assembling workshop

Warehouse

Loading container

How to Select the Correct Caster & Wheel

Important Notice

Selecting the correct caster for your application is very important. If you do not select the correct caster, you or the users of your equipment could be injured. If you are not absolutely certain which caster is the correct one for your use, contact a safety or engineering consultant who knows your equipment and its intended use to assist you.

Introduction

Casters and wheels are offered in a wide variety of sizes and types. Although there is no simple formula to follow in choosing the proper caster or wheel, the information shown below and on the following pages is intended as a guide to assist you in specifying, operating and maintaining casters for safety and maximum life. Please read this information carefully.

Load Weight & Wheel Size

The first consideration for caster selection is to determine the combined weight of the equipment and maximum load on this equipment. Generally, the greater the weight, the larger the wheel required for the caster. Larger wheels distribute weight and roll more easily over floor obstructions.

To determine the load capacity for each caster, divide the combined weight of the equipment and maximum load by the number of casters to be used. This is the load that each caster and wheel must support. Always select a caster and wheel that are rated for a capacity greater than the calculated load per caster. This allows for unusual conditions that could change the performance of the caster.

Wheel Choices

As a general rule, hard tread wheels perform better on soft or smooth floors and soft tread wheels roll better on hard or rough floors including outdoor surfaces. When choosing a wheel type, take into consideration all special floor conditions－ tracks, gutters, grates, sills, elevator thresholds, seams and dock plates. The larger and softer the wheel, the greater the ability to roll over rails and similar obstacles. To protect floors from damage, choose softer cushion tread wheels. Solid Cushion Rubber, Advantage ? TPR (thermoplastic rubber), High Modulus Rubber and Pneumatic Rubber wheels will provide quiet operation and maximum floor protection. Steel and Cast Iron wheels are not recommended for floor protection, but they are well suited for industrial applications.

Polyurethane wheels like cast iron polyurethane wheels are frequently an effective compromise giving moderate floor protection with greater load capacity.

Wheel Bearings

Plain Bearing:

Wheel bearing bore riding directly on the spanner bushing and/or axle.

Ball Bearing:

Recommended for loads where maximum rolling ease is required. They require less effort to start rolling and keep rolling than other bearing types.

Roller Bearing:

This bearing carries greater loads than same size ball bearing. Well suited for heavier, industrial uses.

Delrin® Bearing:

An economical bearing well suited to conditions of frequent exposure to water, steam cleaning, salts, brine and corrosive conditions.

Flange bearing:

Non-precision industrial grade bearings are press-fitted into wheel hubs.

Unusual / Special Operating Conditions

Often unusual operating conditions require selection of casters and wheels with special features.

Listed below are several guidelines for selecting casters for special conditions:

- The presence of acids, oils or corrosive chemicals require wheels made of polyurethane, phenolic, polyolefin or steel.
- Extreme temperatures require special bearing lubricants or plain bore bearings.
- Never use rubber tread wheels in corrosive environments.
- In hospitals, bakeries and food processing plants where cart washings are required, select nickel-plated casters with raceway grease seals and zerk grease fittings.
- For very frequent wash down applications or wet environments, specify stainless steel casters.
- In textile plants and laundries, specify casters with thread guards to reduce the collection of thread, string and general floor debris.
- For office machines such as copiers which require a low load height, choose Flywheel business machine casters and low profile casters.

Safety & Maintenance Information

■ General Safety & Maintenance Information:

Users are responsible for the proper operation and maintenance of the equipment they use. Some equipment will quickly become damaged and unsafe if abused or subjected to improper demands. If equipment is regularly maintained and not abused, you will get the maximum safety and service performance from your casters.

- Do not overload equipment
- Do not drop heavy loads on carts or trucks
- Do not use at high speeds

These uses create severe impact and shock loads that may lead to caster, wheel and equipment failure.

■ Check Equipment Frames & Fasteners

Periodically turn equipment on its end or side and check the following:

- Look for broken welds or deck boards.
- Tighten loose nuts and bolts.
- Look for equipment frame distortion caused by overloads and impact loads.

Distorted frames can lead to wheel failure by placing disproportionate loads on one or two Casters.

- If casters are stem types, make sure that the legs of the equipment are not bent and that mounting bolts are securely fastened.
- Always use locknuts or lock washers to mount casters to equipment.
- Make certain casters with expanding adapter stems are held firmly in place in tubular equipment.

■ Caster Maintenance & Inspection

Check the swivel assembly for excessive play due to wear. If the swivel assembly is loose,it is advisable to replace the fork or the entire caster. If the caster has a king bolt and nut, make sure it is fastened securely. If the swivel does not turn freely, check for corrosion or dirt binding the raceways. Again, it may be necessary to replace the swivel assembly or the entire caster.

If the equipment has rigid casters at one end, make sure that the caster fork legs are not bent or distorted.

■ Wheel Maintenance & Inspection

Check wheels for visible tread wear. Flat spots may indicate accumulation of floor debris such as string or thread which can cause the wheel to bind. Remove the wheel axle bolt and nut. Clean out foreign material and check wheel bearings for wear or failure. Re-assemble if parts are not damaged. Wheel thread guards may be installed to reduce buildup if string and thread wrapping is a continuing problem. After wheels have been inspected and repaired or replaced, be sure to install a new axle nut and tighten it properly. Use lock washers or lock nuts on all axles.

■ Brake Maintenance & Inspection

Check brakes for proper operation. If brakes slip due to worn or damaged wheels, replace the wheels immediately and retest the brakes. If the brake mechanism itself is not operating properly, repair or replace It.

Before returning the equipment to use, always retest brakes.

Wheel Material Capability & Characteristic

Wheel material	Load (kg)	Agility	Floor protection	Slience	Shock resistance	Abrasion-resistance	Chemistry-resistance	Suitable Temperature	Hardness
Soft rubber	20~180	Common	Best	Best	Best	Better	Common	-5~50	85±3 (A)
Hard rubber	20~90	Common	Best	Best	Bad	Better	Common	-5~50	100 (A)
Plastic	10~350	Best	Bad	Bad	Bad	Bad	Best	-5~80	65 (D)
Nylon	60~1000	Best	Bad	Bad	Bad	Better	Best	-15~80	65 (D)
TPR	35~240	Common	Best	Best	Best	Better	Common	-5~80	85±5 (A)
PU	40~410	Better	Best	Best	Best	Best	Best	-5~80	90±5 (A)
Elastic rubber	50~350	Common	Best	Best	Best	Better	Common	-5~70	70±3 (A)
Mold on rubber	120~300	Common	Best	Best	Best	Better	Common	-5~50	85±3 (A)
Cast iron PU	200~800	Better	Best	Best	Best	Best	Best	-20~80	90±5 (A)
Aluminium core PU	300~600	Better	Best	Best	Best	Best	Best	-20~80	90±5 (A)
Aluminium core elastic rubber	200~350	Common	Best	Best	Best	Better	Common	-15~70	70±3 (A)
Cast iron	20~400	Best	Bad	Bad	Bad	Best	Common	-50~200	——
Phenolic	200~500	Common	Bad	Bad	Bad	Better	Common	-10~300	100 (A)
Pneumatic	120~230	Common	Best	Best	Best	Better	Common	-5~50	——

EN12531 Dynamic Load Test Standard

Test items	Test standard
Speed	1.1meter/second(4kilometer/hour)
Barrier height	2.5% of wheel dia.(wheel rigidity≥90 degrees SHORE A)
	5% of wheel dia.(wheel rigidity≤90 degrees
Space between barrier	1-3meter
Hitting barrier	500times
Stop period	After three mins running, stop a min
Running times	15000(Wheel girth x 15000 times=total length)

Bearing type

Caster installation tips (L=Load)

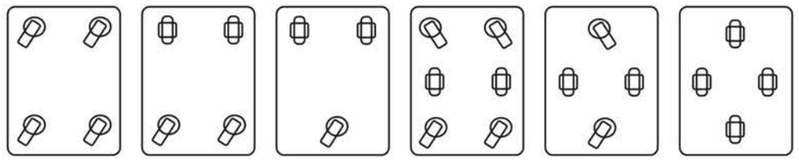

L=3PCS L=3PCS L=3PCS L=4PCS L=3PCS L=2PCS

Caster terms

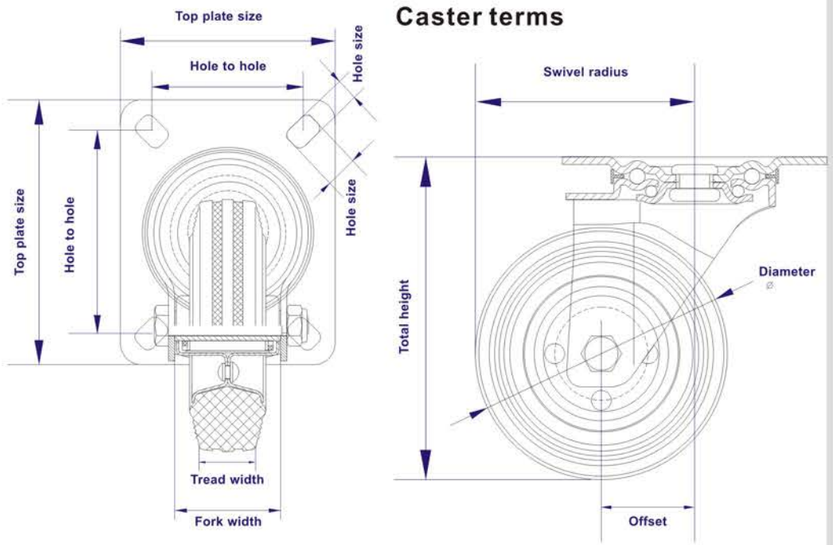

Contents

51 European type light duty caster 38 - 70 Pag.7-9

51TW European type twin wheel caster 60 - 80 Pag.10

35 European type indoor caster 50 - 80 Pag. 11

36 European type light duty caster 50 - 60 Pag.12

58 Shopping cart caster 60 - 140 Pag.13-14

23 Small caster 10 - 60 Pag.15-18

33 Indoor caster 20 - 100 Pag.19-24

40 American type light duty caster 38 - 100 Pag.25-26

11 Industrial caster 40 - 300 Pag.27-44

14 European type indoor caster 80 - 100 Pag.45-46

15 Garbage container caster 160 - 210 Pag.47

LT Kingpinless medium duty caster 150 - 300 Pag.48

20 Low profile caster 40 - 100 Pag.49-52

TW Business machine twin wheel caster 80 - 80 Pag.53

26 Medical caster 70 - 150 Pag.54

28 Institutional caster 80 - 180 Pag.55-64

65 American type Institutional caster 80 - 150 Pag.65-66

45 European standard industrial caster 60 - 450 Pag.67-86

Contents

Pag.87-90 180 - 200 European type medium duty caster 47

Pag.90 50 - 210 European type industrial caster 48

Pag.91-92 150 - 600 European type medium duty caster 50

Pag.93-96 200 - 550 European type heavy duty caster 80

Pag.97-114 120 - 700 Heavy duty caster 29

Pag.115 200 - 500 Phenolic heavy duty caster 30

Pag.116 300 - 550 Shock absorber caster 60

Pag.117 400 - 1000 Super heavy duty caster 90

Pag.118 500 - 1300 Super heavy duty caster 91

Pag.119 500 - 2000 Super heavy duty twin wheel caster 91TW

Pag.120-121 150 - 800 Scaffolding caster

Pag.122-125 200 - 6000 Cast Iron Polyurethane Wheel

Pag.126 290 - 1400 Cast Iron Wheel

Pag.127 30 - 130 Special Wheel

Pag.128-130 15 - 45 Furniture caster

Pag.131-132 60 - 150 Stainless steel industrial caster 11SS

Pag.133-136 60 - 180 Stainless steel medium duty caster 28SS

Pag.137 120 - 245 Stainless steel heavy duty caster 29SS

Pag.138 Expander

51 European type light duty caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head

Wheel:
Materials: Thermoplastic rubber
Hardness: 85±5 Shore A
Bearing type: Plain bearing
Temperature range: -5°C~80°C
Stainless steel housing is available

Threadguard option

ART-NO.					
51050TPRSW	50x19	10x23	6x23		38
51060TPRSW	60x23	10x28	6x30		50
51080TPRSW	80x24	10x29	6x31		60
51100TPRSW	100x24	10x29	6x31		70

Swivel Caster

ART-NO.								
51050TPR	50x19	72	26	60x60x2	46x46	12x6	23x2	38
51060TPR	60x23	82	22	60x60x2	46x46	12x6	30x2	50
51080TPR	80x24	104	28	60x60x2	46x46	12x6	31x2	60
51100TPR	100x24	121	30	60x60x2	46x46	12x6	31x2	70

Fixed Caster

ART-NO.							
51050TPRF	50x19	72	60x60	46x46	12x6	23x2	38
51060TPRF	60x23	82	60x67	46x46	12x6	30x2	50
51080TPRF	80x24	104	60x67	46x46	12x6	31x2	60
51100TPRF	100x24	121	60x67	46x46	12x6	31x2	70

Double Brake Caster

ART-NO.								
51050TPRB	50x19	72	26	60x60x2	46x46	12x6	23x2	38
51060TPRB	60x23	82	22	60x60x2	46x46	12x6	30x2	50
51080TPRB	80x24	104	28	60x60x2	46x46	12x6	31x2	60
51100TPRB	100x24	121	30	60x60x2	46x46	12x6	31x2	70

Bolt Hole Swivel Caster

ART-NO.						
51050TPRD	50x19	72	26	10.3	23x2	38
51060TPRD	60x23	82	22	10.3	30x2	50
51080TPRD	80x24	104	28	10.3	31x2	60
51100TPRD	100x24	121	30	10.3	31x2	70

Blot Hole Double Brake Caster

ART-NO.						
51050TPRDB	50x19	72	26	10.3	23x2	38
51060TPRDB	60x23	82	22	10.3	30x2	50
51080TPRDB	80x24	104	28	10.3	31x2	60
51100TPRDB	100x24	121	30	10.3	31x2	70

51 European type light duty caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head

Wheel:
Materials: Plastic
Bearing type: Plain bearing
Temperature range: -5°C ~80°C
Stainless steel housing is available

Without
Threadguard option

ART-NO.					
51050PPSW	50x19	10x23	6x23		38
51060PPSW	60x23	10x28	6x30		50
51080PPSW	80x24	10x29	6x31		60
51100PPSW	100x24	10x29	6x31		70

Swivel Caster

ART-NO.								
51050PP	50x19	72	26	60x60x2	46x46	12x6	23x2	38
51060PP	60x23	82	22	60x60x2	46x46	12x6	30x2	50
51080PP	80x24	104	28	60x60x2	46x46	12x6	31x2	60
51100PP	100x24	121	30	60x60x2	46x46	12x6	31x2	70

Fixed Caster

ART-NO.							
51050PPF	50x19	72	60x60	46x46	12x6	23x2	38
51060PPF	60x23	82	60x67	46x46	12x6	30x2	50
51080PPF	80x24	104	60x67	46x46	12x6	31x2	60
51100PPF	100x24	121	60x67	46x46	12x6	31x2	70

Double Brake Caster

ART-NO.								
51050PPB	50x19	72	26	60x60x2	46x46	12x6	23x2	38
51060PPB	60x23	82	22	60x60x2	46x46	12x6	30x2	50
51080PPB	80x24	104	28	60x60x2	46x46	12x6	31x2	60
51100PPB	100x24	121	30	60x60x2	46x46	12x6	31x2	70

Bolt Hole Swivel Caster

ART-NO.						
51050PPD	50x19	72	26	10.3	23x2	38
51060PPD	60x23	82	22	10.3	30x2	50
51080PPD	80x24	104	28	10.3	31x2	60
51100PPD	100x24	121	30	10.3	31x2	70

Blot Hole Double Brake Caster

ART-NO.						
51050PPDB	50x19	72	26	10.3	23x2	38
51060PPDB	60x23	82	22	10.3	30x2	50
51080PPDB	80x24	104	28	10.3	31x2	60
51100PPDB	100x24	121	30	10.3	31x2	70

51 European type light duty caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head

Wheel:
Materials: Nylon
Bearing type: Plain bearing
Temperature range: -15°C~80°C
Stainless steel housing is available

AVAILABLE IN Inox 304 STAINLESS STEEL

Threadguard option

ART-NO.					Kg
51050NYSW	50x19	10x23	6x23		38
51060NYSW	60x23	10x28	6x30		50
51080NYSW	80x24	10x29	6x31		60
51100NYSW	100x24	10x29	6x31		70

Swivel Caster

ART-NO.								Kg
51050NY	50x19	72	26	60x60x2	46x46	12x6	23x2	38
51060NY	60x23	82	22	60x60x2	46x46	12x6	30x2	50
51080NY	80x24	104	28	60x60x2	46x46	12x6	31x2	60
51100NY	100x24	121	30	60x60x2	46x46	12x6	31x2	70

Fixed Caster

ART-NO.							Kg
51050NYF	50x19	72	60x60	46x46	12x6	23x2	38
51060NYF	60x23	82	60x67	46x46	12x6	30x2	50
51080NYF	80x24	104	60x67	46x46	12x6	31x2	60
51100NYF	100x24	121	60x67	46x46	12x6	31x2	70

Double Brake Caster

ART-NO.								Kg
51050NYB	50x19	72	26	60x60x2	46x46	12x6	23x2	38
51060NYB	60x23	82	22	60x60x2	46x46	12x6	30x2	50
51080NYB	80x24	104	28	60x60x2	46x46	12x6	31x2	60
51100NYB	100x24	121	30	60x60x2	46x46	12x6	31x2	70

Bolt Hole Swivel Caster

ART-NO.						Kg
51050NYD	50x19	72	26	10.3	23x2	38
51060NYD	60x23	82	22	10.3	30x2	50
51080NYD	80x24	104	28	10.3	31x2	60
51100NYD	100x24	121	30	10.3	31x2	70

Blot Hole Double Brake Caster

ART-NO.						Kg
51050NYDB	50x19	72	26	10.3	23x2	38
51060NYDB	60x23	82	22	10.3	30x2	50
51080NYDB	80x24	104	28	10.3	31x2	60
51100NYDB	100x24	121	30	10.3	31x2	70

51TW European type twin wheel caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head

AVAILABLE IN Inox 304 STAINLESS STEEL

TPR wheel
Hardness: 85±5 Shore A
Temperature range: -5℃～80℃

51050TWTPR	51050TWTPRB	50x19	8x22	71.5	27	60x60x2	46x46	12x6.5	46x2	70
51075TWTPR	51075TWTPRB	75x23	8x28	103	28	77x67x2.5	56x47	16x8	59x2.5	100

51050TWTPRD	51050TWTPRDB	50x19	8x22	71.5	27	10	46x2	70
51075TWTPRD	51075TWTPRDB	75x23	8x28	103	28	12	59x2.5	100

Plastic wheel
Temperature range: -5℃～80℃

51050TWPP	51050TWPPB	50x20	6x22.5	71.5	27	60x60x2	46x46	12x6.5	46x2	70
51075TWPP	51075TWPPB	75x23	6x28	103	28	77x67x2.5	56x47	16x8	59x2.5	100

51050TWPPD	51050TWPPDB	50x20	6x22.5	71.5	27	10	46x2	70
51075TWPPD	51075TWPPDB	75x23	6x28	103	28	12	59x2.5	100

Nylon wheel
Plain bearing
Temperature range: -15°C ~80°C

51050TWNY	51050TWNYB	50x20	6x22.5	71.5	27	60x60x2	46x46	12x6.5	46x2	70
51075TWNY	51075TWNYB	75x23	6x28	103	28	77x67x2.5	56x47	16x8	59x2.5	100

51050TWNYD	51050TWNYDB	50x20	6x22.5	71.5	27	10	46x2	70
51075TWNYD	51075TWNYDB	75x23	6x28	103	28	12	59x2.5	100

Polyurethane wheel
Plain bearing
Hardness: 90±5 Shore A
Temperature range: -5°C~80°C

51050TWPU	51050TWPUB	50x19	8x20.5	71.5	27	60x60x2	46x46	12x6.5	46x2	70
51075TWPU	51075TWPUB	75x21	8x25	103	28	77x67x2.5	56x47	16x8	59x2.5	100

51050TWPUD	51050TWPUDB	50x19	8x20.5	71.5	27	10	46x2	70
51075TWPUD	51075TWPUDB	75x21	8x25	103	28	12	59x2.5	100

Hard rubber wheel
Hardness: 100 Shore A
Temperature range: - 5 ℃～50℃

51050TWHR	51050TWHRB	50x20	6x23	71.5	27	60x60x2	46x46	12x6.5	46x2	70

51050TWHRD	51050TWHRDB	50x20	6x23	71.5	27	10	46x2	70

35 European type indoor caster

Housing:
Made of pressed steel,zinc plated double ballrace swivel head

Wheel:
Materials: Thermoplastic rubber
Hardness: 85±5 Shore A
Bearing type: Plain bearing
Temperature range: - 5 °C~80 °C

35XXXTPRDF
Bolt hole rigid is available
Without threadguard option

ART-NO.					Kg
35060TPRSW	60x22	10x27	6x29		60
35080TPRSW	80x22	10x27	6x29		80
35100TPRSW	100x27	12x33	8x34		90
35125TPRSW	125x27	12x33	8x34		100

Swivel Caster

ART-NO.								Kg
35060TPR	60x22	89	26	60x60x2	45x45	6. 3	29x2	60
35080TPR	80x22	108	26	60x60x2	45x45	6. 3	29x2	80
35100TPR	100x27	134	34	76x70x2	60x50	8. 3	34x2	90
35125TPR	125x27	158	34	76x70x2	60x50	8. 3	34x2	100

Fixed Caster

ART-NO.								Kg
35060TPRF	60x22	89	60x60x2	45x45	6. 3	29x2	60
35080TPRF	80x22	108	60x60x2	45x45	6. 3	29x2	80
35100TPRF	100x27	134	76x70x2	60x50	8. 3	34x2	90
35125TPRF	125x27	158	76x70x2	60x50	8. 3	34x2	100

Double Brake Caster ,Nylon Brake

ART-NO.								Kg
35060TPRB	60x22	89	29.5	60x60x2	45x45	6. 3	29x2	60
35080TPRB	80x22	108	25	60x60x2	45x45	6. 3	29x2	80
35100TPRB	100x27	134	34	76x70x2	60x50	8. 3	34x2	90
35125TPRB	125x27	158	34	76x70x2	60x50	8. 3	34x2	100

Bolt Hole Swivel Caster

ART-NO.						Kg
35060TPRD	60x22	89	26	12	29x2	60
35080TPRD	80x22	108	26	12	29x2	80
35100TPRD	100x27	134	34	12	34x2	90
35125TPRD	125x27	158	34	12	34x2	100

Bolt Hole Double Brake Caster,Nylon Brake

ART-NO.						Kg
35060TPRDB	60x22	89	29.5	12	29x2	60
35080TPRDB	60x22	108	25	12	29x2	80
35100TPRDB	100x27	134	34	12	34x2	90
35125TPRDB	125x27	158	34	12	34x2	100

Threaded Stem Swivel Caster

ART-NO.						Kg
35060TPRT	60x22	89	26	10x25	29x2	60
35080TPRT	80x22	108	26	10x25	29x2	80
35100TPRT	100x27	132	34	12x30	34x2	90
35125TPRT	125x27	156	34	12x30	34x2	100

Threaded Stem Double Brake Caster,Nylon Brake

ART-NO.						Kg
35060TPRTB	60x22	89	29.5	10x25	29x2	60
35080TPRTB	80x22	108	25	10x25	29x2	80
35100TPRTB	100x27	132	34	12x30	34x2	90
35125TPRTB	125x27	156	34	12x30	34x2	100

36 European type light duty caster

Housing:
Made of pressed steel,zinc plated, double ballrace swivel head

Wheel:
Materials: Rubber
Hardness: 85±3 Shore A
Bearing type: Plain bearing
Temperature range: - 5 °C~50°C

ART-NO.					Kg
36080SW	80x22	10x26.5	6x29		50
36095SW	95x22	10x26.5	6x29		60

Threaded Stem Swivel Caster

ART-NO.						Kg
36080T	80x22	100	18.5	10x15	29x1.8	50
36095T	95x22	114	20.5	10x15	29x1.8	60

Threaded Stem Rear Brake Caster

ART-NO.						Kg
36080TB	80x22	100	18.5	10x15	29x1.8	50
36095TB	95x22	114	20.5	10x15	29x1.8	60

Grip Ring Stem Swivel Caster

ART-NO.						Kg
36080S	80x22	100	18.5	9x37.5	29x1.8	50
36095S	95x22	114	20.5	9x37.5	29x1.8	60

Grip Ring Stem Rear Brake Caster

ART-NO.						Kg
36080SB	80x22	100	18.5	9x37.5	29x1.8	50
36095SB	95x22	114	20.5	9x37.5	29x1.8	60

Shopping cart caster



Precision Ball Bearings
Swivelling Head



PU Escalator Swivel/Fixed Caster

ART-NO.									
58125AS	58125AF1	125x30	8x40	158	43	41x2. 5	ø12	6202	90

PU Escalator Fixed Caster

ART-NO.								
58125AF2	125x30	8x40	158	43	41x2. 5	ø12	6202	90

PU Escalator Swivel/Fixed Caster

ART-NO.									
58125CS	58125CF1	127x28	8x40	159	43	41x2. 5	ø12	6202	90

PU Escalator Fixed Caster

ART-NO.								
58125CF2	127x28	8x40	159	43	41x2. 5	ø12	6202	90

Shopping cart caster



Precision Ball Bearings
Swivelling Head

TPR Escalator Swivel/Fixed Caster

ART-NO.									
58125DS	58125DF1	125x32	8x40	158	43	41x2. 5	ø12	6202	140

TPR Escalator Fixed Caster

ART-NO.								
58125DF2	125x32	8x40	158	43	41x2. 5	ø12	6202	140



Precision Ball Bearings
Swivelling Head

TPR Bolt Hole Shopping Cart Caster

ART-NO.								
55075TPRD	75x26	8x32	98	30	32x2	ø12.5	6202	60
55100TPRD	100x32	8x37	129	35	37x2.5	ø12.5	6202	100
55125TPRD	125x32	8x37	155	38	37x2.5	ø12.5	6202	140

TPR Bolt Hole Shopping Cart Caster,Type B

ART-NO.								
B55100TPRD	100x25.5	8x30.5	125	35	32.5x2	ø10.5		70
B55125TPRD	125x25.5	8x30.5	152	35	32.5x2	ø10.5		90

Other fittings

Threaded stem

Choc attachment flat pin

23 Small caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated
double ballrace swivel head

23XXX

23XXXF

23XXXB1

Rubber wheel, Delrin bearing, Hardness: 85±3 Shore A , Temperature range: - 5° C~50° C

23040	23040F	23040B1	40x17	6x20	54	17	45x40	35x28.5	5	23x1.2	20
23050	23050F	23050B1	50x22	6x25	65	22	58x48	46x35	6	27x1.5	25
23065	23065F	23065B1	65x23	6x25	84	25	65x54	51x38	7	27x2	30
23075	23075F	23075B1	75x21	6x23	93	25	65x54	51x38	7	27x2	40
23100	23100F	23100B1	100x27	8x31	123	32	84x72	62x50	11x8.5	32x2	60

23XXXD

23XXXDB1

23XXXT

23XXXTB1

Rubber wheel, Delrin bearing, Hardness: 85±3 Shore A , Temperature range: -5 °C ~50°C

23040D	23040DB1	23040T	23040TB1	40x17	6x20	54	17	8	10x25	23x1.2	20
23050D	23050DB1	23050T	23050TB1	50x22	6x25	65	22	8	10x25	27x1.5	25
23065D	23065DB1	23065T	23065TB1	65x23	6x25	84	25	8	10x25	27x2	30
23075D	23075DB1	23075T	23075TB1	75x21	6x23	93	25	8	10x25	27x2	40
23100D	23100DB1	23100T	23100TB1	100x27	8x31	122	32	8	10x25	32x2	60

23XXXE

23XXXEF

23XXXEB1

Hard rubber wheel, Delrin bearing , Hardness:100 Shore A , Temperature range : -5°C~50°C

23040E	23040EF	23040EB1	40x17	6x20	54	17	45x40	35x28.5	5	23x1.2	20
23050E	23050EF	23050EB1	50x22	6x25	65	22	58x48	46x35	6	27x1.5	25
23065E	23065EF	23065EB1	65x23	6x25	84	25	65x54	51x38	7	27x2	30
23075E	23075EF	23075EB1	75x21	6x23	93	25	65x54	51x38	7	27x2	40
23100E	23100EF	23100EB1	100x27	8x31	123	32	84x72	62x50	11x8.5	32x2	70

23XXXED

23XXXEDB1

23XXXET

23XXXETB1

Hard rubber wheel, Delrin bearing , Hardness:100 Shore A , Temperature range : -5°C~50°C

23040ED	23040EDB1	23040ET	23040ETB1	40x17	6x20	54	17	8	10x25	23x1.2	20
23050ED	23050EDB1	23050ET	23050ETB1	50x22	6x25	65	22	8	10x25	27x1.5	25
23065ED	23065EDB1	23065ET	23065ETB1	65x23	6x25	84	25	8	10x25	27x2	30
23075ED	23075EDB1	23075ET	23075ETB1	75x21	6x23	93	25	8	10x25	27x2	40
23100ED	23100EDB1	23100ET	23100ETB1	100x27	8x31	122	32	8	10x25	32x2	70

23 Small caster

FLYWHEEL

23xxxP

23XXXPF

23XXXPB1

Plastic wheel, Temperature range: -5°C ~80

23025P			25x14	4x15	34	14	39x33	29x23	4	17x1.2	10
23030P			30x14	4x15	37	14	39x33	29x23	4	17x1.2	15
23040P	23040PF	23040PB1	40x17	6x20	54	17	45x40	35x28.5	5	23x1.2	20
23050P	23050PF	23050PB1	50x22	6x25	65	22	58x48	46x35	6	27x1.5	40
23065P	23065PF	23065PB1	65x23	6x25	84	25	65x54	51x38	7	27x2	50
23075P	23075PF	23075PB1	75x20	6x27	93	25	65x54	51x38	7	27x2	60
23100P	23100PF	23100PB1	100x27	8x31	123	32	84x72	62x50	11x8.5	32x2	80

23XXXPD

23XXXPDB1

23XXXPT

23XXXPTB1

Plastic wheel, Temperature range: -5°C ~80

23040PD	23040PDB1	23040PT	23040PTB1	40x17	6x20	54	17	8	10x25	23x1.2	20
23050PD	23050PDB1	23050PT	23050PTB1	50x22	6x25	65	22	8	10x25	27x1.5	40
23065PD	23065PDB1	23065PT	23065PTB1	65x23	6x25	84	25	8	10x25	27x2	50
23075PD	23075PDB1	23075PT	23075PTB1	75x20	6x27	93	25	8	10x25	27x2	60
23100PD	23100PDB1	23100PT	23100PTB1	100x27	8x31	122	32	8	10x25	32x2	80

23XXXG

23XXXGF

23XXXGB1

Gray rubber wheel, Plain bearing, Hardness :85±3 Shore A, Temperature range : - 5 °C ~50

23050G	23050GF	23050GB1	50x16	8x23	65	22	58x48	46x35	6	27x1.5	20
23065G	23065GF	23065GB1	65x19	8x25	84	25	65x54	51x38	7	27x2	20
23075G	23075GF	23075GB1	75x21	10x25	93	25	65x54	51x38	7	27x2	30
23100G	23100GF	23100GB1	100x27	8x31	123	32	84x72	62x50	11x8.5	32x2	45

23XXXGD

23XXXGDB1

23XXXGT

23XXXGTB1

Gray rubber wheel, Plain bearing, Hardness :85±3 Shore A, Temperature range : - 5 °C ~50

23050GD	23050GDB1	23050GT	23050GTB1	50x16	8x23	65	22	8	10x25	27x1.5	20
23065GD	23065GDB1	23065GT	23065GTB1	65x19	8x25	84	25	8	10x25	27x2	20
23075GD	23075GDB1	23075GT	23075GTB1	75x21	10x25	93	25	8	10x25	27x2	30
23100GD	23100GDB1	23100GT	23100GTB1	100x27	8x31	122	32	8	10x25	32x2	45

23 Small caster

23XXXTPR

23XXXTPRF

23XXXTPRB1

TPR wheel , Plain bearing, Hardness : 85 ± 5 Shore A ,Temperature range: - 5°C~80°C

23050TPR	23050TPRF	23050TPRB1	50x17	8x21	65	22	58x48	46x35	6	27x1.5	35
23075TPR	23075TPRF	23075TPRB1	75x21	8x25	93	25	65x54	51x38	7	27x2	55

23XXXTPRD

23XXXTPRDB1

23XXXTPRT

23XXXTPRTB1

TPR wheel , Plain bearing, Hardness : 85 ± 5 Shore A ,Temperature range: - 5°C~80°C

23050TPRD	23050TPRDB1	23050TPRT	23050TPRTB1	50x17	8x21	65	22	8	10x25	27x1.5	35
23075TPRD	23075TPRDB1	23075TPRT	23075TPRTB1	75x21	8x25	93	25	8	10x25	27x2	55

23XXXPU

23XXXPUF

23XXXPUB1

Polyurethane wheel , Plain bearing , Hardness :90 ± 5 Shore A , Temperature range : -5°C~80°C

23050PU	23050PUF	23050PUB1	50x19	8x21	65	22	58x48	46x35	6	27x1.5	40
23075PU	23075PUF	23075PUB1	75x21	8x25	93	25	65x54	51x38	7	27x2	55

23XXXPUD

23XXXPUDB1

23XXXPUT

23XXXPUTB1

Polyurethane wheel , Plain bearing , Hardness :90 ± 5 Shore A , Temperature range : -5°C~80°C

23050PUD	23050PUDB1	23050PUT	23050PUTB1	50x19	8x21	65	22	8	10x25	27x1.5	40
23075PUD	23075PUDB1	23075PUT	23075PUTB1	75x21	8x25	93	25	8	10x25	27x2	55

23 Small caster

23XXXC

23XXXCF

23XXXCD

23XXXCT

Cast Iron wheel

23025C				25x14	4x15	34	14	39x33	29x23	4			17x1.2	10
23030C				30x14	4x15	37	14	39x33	29x23	4			17x1.2	15
23040C		23040CD	23040CT	40x17	6x20	54	17	45x40	35x28.5	5	8	10x25	23x1.2	20
23050C	23050CF	23050CD	23050CT	50x22	6x25	65	22	58x48	46x35	6	8	10x25	27x1.5	30
23065C	23065CF	23065CD	23065CT	65x23	6x25	84	25	65x54	51x38	7	8	10x25	27x2	35

Stem fitting

ADD "S" after numbers



24XXXF

24XXXF

24XXXF

Plastic wheel,Temperature range: -5°C~80°C

24025F	25x12	4x13	30	40x18	30	4	15.6x1.2	20
24030F	30x15	4x15	35	45x20	30	5	17x1.5	30
24045F	45x20	6x20	48	67x24	55	6	21x1.5	40

24XXXPP

24XXXPPF

24XXXPPS

24XXXPPSF

Plastic wheel,Temperature range: -5°C~80°C

24030PP	24030PPF	24030PPS	24030PPSF	30x13	4x20	43	42	9	9	42x33	32x27	5	8x38	18x1.2	15
24040PP	24040PPF	24040PPS	24040PPSF	40x17	6x20	52	52	14	14	42x33	32x27	5	8x38	23x1.8	20
24050PP	24050PPF	24050PPS	24050PPSF	50x22	6x25	65	65	18	18	60x50	58x48	6	8x38	27x1.8	40

33 Indoor caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head

Wheel:
Materials: Gray rubber
Bearing type: Plain bearing
Hardness: 85±3 Shore A
Temperature range: - 5°C~50°C
PVC Tyre is available

Swivel Caster

ART-NO.									Kg
33050	50x16	8x23	72	25	50x50	36x36	12x6.2	26x1.5	20
33065	65x19	8x25	94	30	65x65	49x49	12x6.2	27x2	20
33075	75x21	10x25	104	33	65x65	49x49	12x6.2	27x2	30
33100	100x26	12x31	134	38	75x75	55x55	15x8.5	33x2.5	45
33120	120x27	12x31	158	33	75x75	55x55	15x8.5	33x2.5	50
33125	125x27	12x31	161	33	75x75	55x55	15x8.5	33x2.5	50

Fixed Caster

ART-NO.								Kg
33050F	50x16	8x23	72	65x50	45x33	6. 5	26x1.5	20
33065F	65x19	8x25	94	100x59	81x40	8. 5	27x2	20
33075F	75x21	10x25	104	100x59	81x40	8. 5	27x2	30
33100F	100x26	12x31	134	100x59	81x40	8. 5	33x2.5	45
33120F	120x27	12x31	158	100x59	81x40	8. 5	33x2.5	50
33125F	125x27	12x31	161	100x59	81x40	8. 5	33x2.5	50

Separated Rigid Caster

ART-NO.								Kg
33050F2	50x16	8x23	72	50x50	36x36	12x6.2	26x1.5	20
33065F2	65x19	8x25	94	65x65	49x49	12x6.2	27x2	20
33075F2	75x21	10x25	104	65x65	49x49	12x6.2	27x2	30
33100F2	100x26	12x31	134	75x75	55x55	15x8.5	33x2.5	45
33120F2	120x27	12x31	158	75x75	55x55	15x8.5	33x2.5	50
33125F2	125x27	12x31	161	75x75	55x55	15x8.5	33x2.5	50

Brake Caster,Plastic Pedal

										Kg
33050B1		50x16	8x23	72	25	50x50	36x36	12x6.2	26x1.5	20
33065B1		65x19	8x25	94	30	65x65	49x49	12x6.2	27x2	20
33075B1		75x21	10x25	104	33	65x65	49x49	12x6.2	27x2	30
	33100B1	100x26	12x31	134	38	75x75	55x55	15x8.5	33x2.5	45
	33120B1	120x27	12x31	158	33	75x75	55x55	15x8.5	33x2.5	50
	33125B1	125x27	12x31	161	33	75x75	55x55	15x8.5	33x2.5	50

Double Brake Caster,Steel Pedal

ART-NO.									Kg
33050B2	50x16	8x23	72	24	50x50	36x36	12x6.2	26x1.5	20
33065B2	65x19	8x25	94	30	65x65	49x49	12x6.2	27x2	20
33075B2	75x21	10x25	104	32	65x65	49x49	12x6.2	27x2	30
33100B2	100x26	12x31	134	36	75x75	55x55	15x8.5	33x2.5	45
33120B2	120x27	12x31	158	36	75x75	55x55	15x8.5	33x2.5	50
33125B2	125x27	12x31	161	36	75x75	55x55	15x8.5	33x2.5	50

33 Indoor caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.							Kg
33050D	50x16	8x23	70	25	10.5	26x1.5	20
33065D	65x19	8x25	91	30	10.5	27x2	20
33075D	75x21	10x25	101	33	10.5	27x2	30
33100D	100x26	12x31	132	38	12.9	33x2.5	45
33120D	120x27	12x31	155	33	12.9	33x2.5	50
33125D	125x27	12x31	158	33	12.9	33x2.5	50

Bolt Hole Brake Caster,Plastic Pedal

								Kg
33050DB1		50x16	8x23	70	25	10.5	26x1.5	20
33065DB1		65x19	8x25	91	30	10.5	27x2	20
33075DB1		75x21	10x25	101	33	10.5	27x2	30
	33100DB1	100x26	12x31	132	38	12.9	33x2.5	45
	33120DB1	120x27	12x31	155	33	12.9	33x2.5	50
	33125DB1	125x27	12x31	158	33	12.9	33x2.5	50

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.							Kg
33050DB2	50x16	8x23	70	24	10.5	26x1.5	20
33065DB2	65x19	8x25	91	30	10.5	27x2	20
33075DB2	75x21	10x25	101	32	10.5	27x2	30
33100DB2	100x26	12x31	132	36	12.9	33x2.5	45
33120DB2	120x27	12x31	155	36	12.9	33x2.5	50
33125DB2	125x27	12x31	158	36	12.9	33x2.5	50

Threaded Stem Swivel Caster

ART-NO.							Kg
33050T	50x16	8x23	70	25	10x30	26x1.5	20
33065T	65x19	8x25	91	30	10x30	27x2	20
33075T	75x21	10x25	101	33	10x30	27x2	30
33100T	100x26	12x31	132	38	12x30	33x2.5	45
33120T	120x27	12x31	155	33	12x30	33x2.5	50
33125T	125x27	12x31	158	33	12x30	33x2.5	50

Threaded Stem Brake Caster,Plastic Pedal

								Kg
33050TB1		50x16	8x23	70	25	10x30	26x1.5	20
33065TB1		65x19	8x25	91	30	10x30	27x2	20
33075TB1		75x21	10x25	101	33	10x30	27x2	30
	33100TB1	100x26	12x31	132	38	12x30	33x2.5	45
	33120TB1	120x27	12x31	155	33	12x30	33x2.5	50
	33125TB1	125x27	12x31	158	33	12x30	33x2.5	50

Threaded Stem Double Brake Caster,Steel Pedal

ART-NO.							Kg
33050TB2	50x16	8x23	70	24	10x30	26x1.5	20
33065TB2	65x19	8x25	91	30	10x30	27x2	20
33075TB2	75x21	10x25	101	32	10x30	27x2	30
33100TB2	100x26	12x31	132	36	12x30	33x2.5	45
33120TB2	120x27	12x31	155	36	12x30	33x2.5	50
33125TB2	125x27	12x31	158	36	12x30	33x2.5	50

33 Indoor caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head

Wheel:
Materials: Nylon
Temperature range: -15°C~80°C
Plastic wheel is opptional

Swivel Caster

ART-NO.									Kg
33050NY	50x18	6.2x23	72	25	50x50	36x36	12x6.2	26x1.5	60
33065NY	65x18	6.2x23	94	30	65x65	49x49	12x6.2	27x2	80
33075NY	75x22	8.2x25	104	33	65x65	49x49	12x6.2	27x2	80
33100NY	100x26	8.2x31	134	38	75x75	55x55	15x8.5	33x2.5	100
33120NY	120x26	8.2x31	158	33	75x75	55x55	15x8.5	33x2.5	100

Fixed Caster

ART-NO.									Kg
33050NYF	50x18	6.2x23	72	65x50	45x33	6. 5	26x1.5	60
33065NYF	65x18	6.2x23	94	100x59	81x40	8. 5	27x2	80
33075NYF	75x22	8.2x25	104	100x59	81x40	8. 5	27x2	80
33100NYF	100x26	8.2x31	134	100x59	81x40	8. 5	33x2.5	100
33120NYF	120x26	8.2x31	158	100x59	81x40	8. 5	33x2.5	100

Separated Rigid Caster

ART-NO.								Kg
33050NYF2	50x18	6.2x23	72	50x50	36x36	12x6.2	26x1.5	60
33065NYF2	65x18	6.2x23	94	65x65	49x49	12x6.2	27x2	80
33075NYF2	75x22	8.2x25	104	65x65	49x49	12x6.2	27x2	80
33100NYF2	100x26	8.2x31	134	75x75	55x55	15x8.5	33x2.5	100
33120NYF2	120x26	8.2x31	158	75x75	55x55	15x8.5	33x2.5	100

Brake Caster,Plastic Pedal

										Kg
33050NYB1		50x18	6.2x23	72	25	50x50	36x36	12x6.2	26x1.5	60
33065NYB1		65x18	6.2x23	94	30	65x65	49x49	12x6.2	27x2	80
33075NYB1		75x22	8.2x25	104	33	65x65	49x49	12x6.2	27x2	80
	33100NYB1	100x26	8.2x31	134	38	75x75	55x55	15x8.5	33x2.5	100
	33120NYB1	120x26	8.2x31	158	33	75x75	55x55	15x8.5	33x2.5	100

Double Brake Caster,Steel Pedal

ART-NO.									Kg
33050NYB2	50x18	6.2x23	72	24	50x50	36x36	12x6.2	26x1.5	60
33065NYB2	65x18	6.2x23	94	30	65x65	49x49	12x6.2	27x2	80
33075NYB2	75x22	8.2x25	104	32	65x65	49x49	12x6.2	27x2	80
33100NYB2	100x26	8.2x31	134	36	75x75	55x55	15x8.5	33x2.5	100
33120NYB2	120x26	8.2x31	158	36	75x75	55x55	15x8.5	33x2.5	100

33 Indoor caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.							Kg
33050NYD	50x18	6.2x23	70	25	10.5	26x1.5	60
33065NYD	65x18	6.2x23	91	30	10.5	27x2	80
33075NYD	75x22	8.2x25	101	33	10.5	27x2	80
33100NYD	100x26	8.2x31	132	38	12.9	33x2.5	100
33120NYD	120x26	8.2x31	155	33	12.9	33x2.5	100

Bolt Hole Brake Caster,Plastic Pedal

								Kg
33050NYDB1		50x18	6.2x23	70	25	10.5	26x1.5	60
33065NYDB1		65x18	6.2x23	91	30	10.5	27x2	80
33075NYDB1		75x22	8.2x25	101	33	10.5	27x2	80
	33100NYDB1	100x26	8.2x31	132	38	12.9	33x2.5	100
	33120NYDB1	120x26	8.2x31	155	33	12.9	33x2.5	100

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.							Kg
33050NYDB2	50x18	6.2x23	70	24	10.5	26x1.5	60
33065NYDB2	65x18	6.2x23	91	30	10.5	27x2	80
33075NYDB2	75x22	8.2x25	101	32	10.5	27x2	80
33100NYDB2	100x26	8.2x31	132	36	12.9	33x2.5	100
33120NYDB2	120x26	8.2x31	155	36	12.9	33x2.5	100

Threaded Stem Swivel Caster

ART-NO.							Kg
33050NYT	50x18	6.2x23	70	25	10x30	26x1.5	60
33065NYT	65x18	6.2x23	91	30	10x30	27x2	80
33075NYT	75x22	8.2x25	101	33	10x30	27x2	80
33100NYT	100x26	8.2x31	132	38	12x30	33x2.5	100
33120NYT	120x26	8.2x31	155	33	12x30	33x2.5	100

Threaded Stem Brake Caster,Plastic Pedal

								Kg
33050NYTB1		50x18	6.2x23	70	25	10x30	26x1.5	60
33065NYTB1		65x18	6.2x23	91	30	10x30	27x2	80
33075NYTB1		75x22	8.2x25	101	33	10x30	27x2	80
	33100NYTB1	100x26	8.2x31	132	38	12x30	33x2.5	100
	33120NYTB1	120x26	8.2x31	155	33	12x30	33x2.5	100

Threaded Stem Double Brake Caster,Steel Pedal

ART-NO.							Kg
33050NYTB2	50x18	6.2x23	70	24	10x30	26x1.5	60
33065NYTB2	65x18	6.2x23	91	30	10x30	27x2	80
33075NYTB2	75x22	8.2x25	101	32	10x30	27x2	80
33100NYTB2	100x26	8.2x31	132	36	12x30	33x2.5	100
33120NYTB2	120x26	8.2x31	155	36	12x30	33x2.5	100

33 Indoor caster

Housing:
Made of pressed steel,zinc plated, double ballrace swivel head

Wheel:
Materials: Thermoplastic rubber
Bearing type: Plain bearing
Hardness: 85±5 Shore A
Temperature range: -5℃~50℃

Swivel Caster

ART-NO.									Kg
33050TPR	50x19	10x23	72	25	50x50	36x36	12x6.2	26x1.5	38
33075TPR	75x23	10x28	104	33	65x65	49x49	12x6.2	27x2	55
33100TPR	100x27	12x33	134	38	75x75	55x55	15x8.5	33x2.5	70
33125TPR	125x27	12x33	161	33	75x75	55x55	15x8.5	33x2.5	80

Fixed Caster

ART-NO.								Kg
33050TPRF1	50x19	10x23	72	65x50	45x33	6. 5	26x1.5	38
33075TPRF1	75x23	10x28	104	100x59	81x40	8. 5	27x2	55
33100TPRF1	100x27	12x33	134	100x59	81x40	8. 5	33x2.5	70
33125TPRF1	125x27	12x33	161	100x59	81x40	8. 5	33x2.5	80

Fixed Caster

ART-NO.								Kg
33050TPRF2	50x19	10x23	72	50x50	36x36	12x6.2	26x1.5	38
33075TPRF2	75x23	10x28	104	65x65	49x49	12x6.2	27x2	55
33100TPRF2	100x27	12x33	134	75x75	55x55	15x8.5	33x2.5	70
33125TPRF2	125x27	12x33	161	75x75	55x55	15x8.5	33x2.5	80

Brake Caster,Plastic Pedal

										Kg
33050TPRB1		50x19	10x23	72	25	50x50	36x36	12x6.2	26x1.5	38
33075TPRB1		75x23	10x28	104	33	65x65	49x49	12x6.2	27x2	55
	33100TPRB1	100x27	12x33	134	38	75x75	55x55	15x8.5	33x2.5	70
	33125TPRB1	125x27	12x33	161	33	75x75	55x55	15x8.5	33x2.5	80

Double Brake Caster,Steel Pedal

ART-NO.									Kg
33050TPRB2	50x19	10x23	72	24	50x50	36x36	12x6.2	26x1.5	38
33075TPRB2	75x23	10x28	104	32	65x65	49x49	12x6.2	27x2	55
33100TPRB2	100x27	12x33	134	36	75x75	55x55	15x8.5	33x2.5	70
33125TPRB2	125x27	12x33	161	36	75x75	55x55	15x8.5	33x2.5	80

33 Indoor caster

Bolt Hole Swivel Caster

ART-NO.							Kg
33050TPRD	50x19	10x23	70	25	10.5	26x1.5	38
33075TPRD	75x23	10x28	101	33	10.5	27x2	55
33100TPRD	100x27	12x33	132	38	12.9	33x2.5	70
33125TPRD	125x27	12x33	158	33	12.9	33x2.5	80

Bolt Hole Brake Caster,Plastic Pedal

ART-NO.								Kg
33050TPRDB1		50x19	10x23	70	25	10.5	26x1.5	38
33075TPRDB1		75x23	10x28	101	33	10.5	27x2	55
	33100TPRDB1	100x27	12x33	132	38	12.9	33x2.5	70
	33125TPRDB1	125x27	12x33	158	33	12.9	33x2.5	80

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.							Kg
33050TPRDB2	50x19	10x23	70	24	10.5	26x1.5	38
33075TPRDB2	75x23	10x28	101	32	10.5	27x2	55
33100TPRDB2	100x27	12x33	132	36	12.9	33x2.5	70
33125TPRDB2	125x27	12x33	158	36	12.9	33x2.5	80

Threaded Stem Swivel Caster

ART-NO.							Kg
33050TPRT	50x19	10x23	70	25	10x30	26x1.5	38
33075TPRT	75x23	10x28	101	33	10x30	27x2	55
33100TPRT	100x27	12x33	132	38	12x30	33x2.5	70
33125TPRT	125x27	12x33	158	33	12x30	33x2.5	80

Threaded Stem Brake Caster,Plastic Pedal

ART-NO.								Kg
33050TPRTB1		50x19	10x23	70	25	10x30	26x1.5	38
33075TPRTB1		75x23	10x28	101	33	10x30	27x2	55
	33100TPRTB1	100x27	12x33	132	38	12x30	33x2.5	70
	33125TPRTB1	125x27	12x33	158	33	12x30	33x2.5	80

Threaded Stem Double Brake Caster,Steel Pedal

ART-NO.							Kg
33050TPRTB2	50x19	10x23	70	24	10x30	26x1.5	38
33075TPRTB2	75x23	10x28	101	32	10x30	27x2	55
33100TPRTB2	100x27	12x33	132	36	12x30	33x2.5	70
33125TPRTB2	125x27	12x33	158	36	12x30	33x2.5	80

40 American type Light duty caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated,
sing ballrace swivel head(50,65,75mm)
double ballrace swivel head(100mm)

Wheel:

Materials: Hard rubber
Hardness: 100 Shore A
Bearing type: Delrin bearing
Temperature range: -5℃~50℃

ART-NO.				Kg
40050SW	50x22	6x25		38
40065SW	63x24	8x31		53
40075SW	75x25	8x31		58
40100SW	100x27	8x31		60

Swivel Caster

ART-NO.								Kg
40050	50x22	66	23	60x48x2	46x35	Ø6.3	26x2	38
40065	63x24	84	29	70x58x2.5	55x42	Ø8.6	32x2	53
40075	75x25	94	31	70x58x2.5	55x42	Ø8.6	32x2	58
40100	100x27	121	34	100x58x2.5	82x40	Ø8.6	32x2.5	60

Fixed Caster

ART-NO.						Kg
40050F	50x22	66	60x42	45x25	Ø6.3	26x2	38
40065F	63x24	84	70x46	55x27	Ø8.6	32x2	53
40075F	75x25	94	70x46	55x27	Ø8.6	32x2	58
40100F	100x27	121	100x58	82x40	Ø8.6	32x2.5	60

Side Brake Caster

ART-NO.								Kg
40050B1	50x22	66	23	60x48x2	46x35	Ø6.3	26x2	38
40065B1	63x24	84	29	70x58x2.5	55x42	Ø8.6	32x2	53
40075B1	75x25	94	31	70x58x2.5	55x42	Ø8.6	32x2	58
40100B1	100x27	121	34	100x58x2.5	82x40	Ø8.6	32x2.5	60

40 American type Light duty caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated,
sing ballrace swivel head(50,65,75mm)
double ballrace swivel head(100mm)

Wheel:

Materials: Nylon
Temperature range: -15℃~80℃

ART-NO.				Kg
40050NYSW	50x22	6x25	——	60
40065NYSW	63x24	8x31	——	80
40075NYSW	75x25	8x31	——	80
40100NYSW	100x27	8x31	——	100

Swivel Caster

ART-NO.								Kg
40050NY	50x22	66	23	60x48x2	46x35	Ø6.3	26x2	60
40065NY	63x24	84	29	70x58x2.5	55x42	Ø8.6	32x2	80
40075NY	75x25	94	31	70x58x2.5	55x42	Ø8.6	32x2	80
40100NY	100x27	121	34	100x58x2.5	82x40	Ø8.6	32x2.5	100

Fixed Caster

ART-NO.						Kg
40050NYF	50x22	66	60x42	45x25	Ø6.3	26x2	60
40065NYF	63x24	84	70x46	55x27	Ø8.6	32x2	80
40075NYF	75x25	94	70x46	55x27	Ø8.6	32x2	80
40100NYF	100x27	121	100x58	82x40	Ø8.6	32x2.5	100

Side Brake Caster

ART-NO.								Kg
40050NYB1	50x22	66	23	60x48x2	46x35	Ø6.3	26x2	60
40065NYB1	63x24	84	29	70x58x2.5	55x42	Ø8.6	32x2	80
40075NYB1	75x25	94	31	70x58x2.5	55x42	Ø8.6	32x2	80
40100NYB1	100x27	121	34	100x58x2.5	82x40	Ø8.6	32x2.5	100

11 Industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Steel core black rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5℃~50℃

Without threadguard option

ART-NO.					Kg
11075SW	75x23	12x30	8x32		40
11085SW	85x24	12x30	8x32		50
11080SW	80x27	12x30	8x42		50
11100SW	100x27	12x40	8x42		60
11125SW	125x34	15x40	10x42		100
11150SW	150x40	20x55	12x57		110
11160SW	160x40	20x55	12x57		130
11200SW	200x46	20x55	12x57		150
11250SW	250x50	20x55	12x57		180
11300SW	300x58	25x68	12x57		200

Swivel Caster

ART-NO.								Kg
11075	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085	85x24	105	40	102x84x2	80x60	14x9	32x2	50
11080	80x27	108	40	102x84x2	80x60	14x9	42x2	50
11100	100x27	130	37	102x84x2.5	80x60	14x9	42x2.5	60
11125	125x34	155	35	102x84x2.5	80x60	14x9	42x2.5	100
11150	150x40	185	43	135x105x2.75	105x80	16x11	57x2.75	110
11160	160x40	195	43	135x105x2.75	105x80	16x11	57x2.75	130
11200	200x46	235	49	135x105x2.75	105x80	16x11	57x2.75	150
11250	250x50	285	55	135x105x2.75	105x80	16x11	57x2.75	180

Fixed Caster

ART-NO.							Kg
11075F	75x23	97	84x72	62x50	11x8.5	32x2	40
11085F	85x24	105	102x84	80x60	14x9	32x2	50
11080F	80x27	108	102x84	80x60	14x9	42x2	50
11100F	100x27	130	102x84	80x60	14x9	42x2.5	60
11125F	125x34	155	102x84	80x60	14x9	42x2.5	100
11150F	150x40	185	135x105	105x80	16x11	57x2.75	110
11160F	160x40	195	135x105	105x80	16x11	57x2.75	130
11200F	200x46	235	135x105	105x80	16x11	57x2.75	150
11250F	250x50	285	135x105	105x80	16x11	57x2.75	180

Double Brake Caster

ART-NO.								Kg
11075B	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085B	85x24	105	35	102x84x2	80x60	14x9	32x2	50
11080B	80x27	108	35	102x84x2	80x60	14x9	42x2	50
11100B	100x27	130	38	102x84x2.5	80x60	14x9	42x2.5	60
11125B	125x34	155	33	102x84x2.5	80x60	14x9	42x2.5	100
11150B	150x40	185	46	135x105x2.75	105x80	16x11	57x2.75	110
11160B	160x40	195	48	135x105x2.75	105x80	16x11	57x2.75	130
11200B	200x46	235	48	135x105x2.75	105x80	16x11	57x2.75	150
11250B	250x50	285	48	135x105x2.75	105x80	16x11	57x2.75	180

Bolt Hole Swivel Caster

ART-NO.						Kg
11075D	75x23	96	32	10.5	32x2	40
11085D	85x24	105	40	12.5	32x2	50
11080D	80x27	108	40	12.5	42x2	50
11100D	100x27	128	37	12.5	42x2.5	60
11125D	125x34	152	35	12.5	42x2.5	100
11150D	150x40	180	43	16.5	57x2.75	110
11160D	160x40	190	43	16.5	57x2.75	130
11200D	200x46	230	49	16.5	57x2.75	150
11250D	250x50	280	55	16.5	57x2.75	180

11 Industrial caster

FLYWHEEL

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075DB	75x23	96	32	10.5	32x2	40
11085DB	85x24	105	35	12.5	32x2	50
11080DB	80x27	108	35	12.5	42x2	50
11100DB	100x27	128	38	12.5	42x2.5	60
11125DB	125x34	152	33	12.5	42x2.5	100
11150DB	150x40	180	46	16.5	57x2.75	110
11160DB	160x40	190	48	16.5	57x2.75	130
11200DB	200x46	230	48	16.5	57x2.75	150
11250DB	250x50	280	48	16.5	57x2.75	180

Threaded Stem Swivel Caster

ART-NO.						Kg
11075T	75x23	96	32	10x30	32x2	40
11085T	85x24	105	35	12x45	32x2	50
11080T	80x27	108	35	12x45	42x2	50
11100T	100x27	128	37	12x45	42x2.5	60
11125T	125x34	152	35	12x45	42x2.5	100
11150T	150x40	180	43	16x40	57x2.75	110
11160T	160x40	190	43	16x40	57x2.75	130
11200T	200x46	230	49	16x40	57x2.75	150
11250T	250x50	280	55	16x40	57x2.75	180

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075TB	75x23	96	32	10x30	32x2	40
11085TB	85x24	105	35	12x45	32x2	50
11080TB	80x27	108	35	12x45	42x2	50
11100TB	100x27	128	38	12x45	42x2.5	60
11125TB	125x34	152	33	12x45	42x2.5	100
11150TB	150x40	180	46	16x40	57x2.75	110
11160TB	160x40	190	48	16x40	57x2.75	130
11200TB	200x46	230	48	16x40	57x2.75	150
11250TB	250x50	280	48	16x40	57x2.75	180

Stem Swivel Caster

ART-NO.						Kg
11075S	75x23	96	32	28x40	32x2	40
11085S	85x24	105	40	28x40	32x2	50
11080S	80x27	108	40	28x40	42x2	50
11100S	100x27	128	37	28x40	42x2.5	60
11125S	125x34	152	35	28x40	42x2.5	100
11150S	150x40	180	43	28x40	57x2.75	110
11160S	160x40	190	43	28x40	57x2.75	130
11200S	200x46	230	49	28x40	57x2.75	150
11250S	250x50	280	55	28x40	57x2.75	180

Stem Double Brake Caster

ART-NO.						Kg
11075SB	75x23	96	32	28x40	32x2	40
11085SB	85x24	105	35	28x40	32x2	50
11080SB	80x27	108	35	28x40	42x2	50
11100SB	100x27	128	38	28x40	42x2.5	60
11125SB	125x34	152	33	28x40	42x2.5	100
11150SB	150x40	180	46	28x40	57x2.75	110
11160SB	160x40	190	48	28x40	57x2.75	130
11200SB	200x46	230	48	28x40	57x2.75	150
11250SB	250x50	280	48	28x40	57x2.75	180

11 Industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Steel core gray rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5℃~50℃

AVAILABLE IN Inox 304 STAINLESS STEEL

Withgout threadguard option

ART-NO.					Kg
11075GSW	75x23	12x30	8x32		40
11085GSW	85x24	12x30	8x32		50
11080GSW	80x27	12x30	8x42		50
11100GSW	100x27	12x40	8x42		60
11125GSW	125x34	15x40	10x42		100
11150GSW	150x40	20x55	12x57		110
11160GSW	160x40	20x55	12x57		130
11200GSW	200x46	20x55	12x57		150
11250GSW	200x50	20x55	12x57		180

Swivel Caster

ART-NO.								Kg
11075G	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085G	85x24	105	40	102x84x2	80x60	14x9	32x2	50
11080G	80x27	108	40	102x84x2	80x60	14x9	42x2	50
11100G	100x27	130	37	102x84x2.5	80x60	14x9	42x2.5	60
11125G	125x34	155	35	102x84x2.5	80x60	14x9	42x2.5	100
11150G	150x40	185	43	135x105x2.75	105x80	16x11	57x2.75	110
11160G	160x40	195	43	135x105x2.75	105x80	16x11	57x2.75	130
11200G	200x46	235	49	135x105x2.75	105x80	16x11	57x2.75	150
11250G	250x50	285	55	135x105x2.75	105x80	16x11	57x2.75	180

Fixed Caster

ART-NO.							Kg
11075GF	75x23	97	84x72	62x50	11x8.5	32x2	40
11085GF	85x24	105	102x84	80x60	14x9	32x2	50
11080GF	80x27	108	102x84	80x60	14x9	42x2	50
11100GF	100x27	130	102x84	80x60	14x9	42x2.5	60
11125GF	125x34	155	102x84	80x60	14x9	42x2.5	100
11150GF	150x40	185	135x105	105x80	16x11	57x2.75	110
11160GF	160x40	195	135x105	105x80	16x11	57x2.75	130
11200GF	200x46	235	135x105	105x80	16x11	57x2.75	150
11250GF	250x50	285	135x105	105x80	16x11	57x2.75	150

Double Brake Caster

ART-NO.								Kg
11075GB	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085GB	85x24	105	35	102x84x2	80x60	14x9	32x2	50
11080GB	80x27	108	35	102x84x2	80x60	14x9	42x2	50
11100GB	100x27	130	38	102x84x2.5	80x60	14x9	42x2.5	60
11125GB	125x34	155	33	102x84x2.5	80x60	14x9	42x2.5	100
11150GB	150x40	185	46	135x105x2.75	105x80	16x11	57x2.75	110
11160GB	160x40	195	48	135x105x2.75	105x80	16x11	57x2.75	130
11200GB	200x46	235	48	135x105x2.75	105x80	16x11	57x2.75	150
11250GB	250x50	285	48	135x105x2.75	105x80	16x11	57x2.75	180

Bolt Hole Swivel Caster

ART-NO.						Kg
11075GD	75x23	96	32	10.5	32x2	40
11085GD	85x24	105	40	12.5	32x2	50
11080GD	80x27	108	40	12.5	42x2	50
11100GD	100x27	128	37	12.5	42x2.5	60
11125GD	125x34	152	35	12.5	42x2.5	100
11150GD	150x40	180	43	16.5	57x2.75	110
11160GD	160x40	190	43	16.5	57x2.75	130
11200GD	200x46	230	49	16.5	57x2.75	150
11250GD	250x50	280	55	16.5	57x2.75	180

11 Industrial caster

FLYWHEEL

AVAILABLE IN Inox 304 STAINLESS STEEL

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075GDB	75x23	96	32	10.5	32x2	40
11085GDB	85x24	105	35	12.5	32x2	50
11080GDB	80x27	108	35	12.5	42x2	50
11100GDB	100x27	128	38	12.5	42x2.5	60
11125GDB	125x34	152	33	12.5	42x2.5	100
11150GDB	150x40	180	46	16.5	57x2.75	110
11160GDB	160x40	190	48	16.5	57x2.75	130
11200GDB	200x46	230	48	16.5	57x2.75	150
11250GDB	250x50	280	48	16.5	57x2.75	150

Threaded Stem Swivel Caster

ART-NO.						Kg
11075GT	75x23	96	32	10x30	32x2	40
11085GT	85x24	105	40	12x45	32x2	50
11080GT	80x27	108	40	12x45	42x2	50
11100GT	100x27	128	37	12x45	42x2.5	60
11125GT	125x34	152	35	12x45	42x2.5	100
11150GT	150x40	180	43	16x40	57x2.75	110
11160GT	160x40	190	43	16x40	57x2.75	130
11200GT	200x46	230	49	16x40	57x2.75	150
11250GT	250x50	280	55	16x40	57x2.75	180

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075GTB	75x23	96	32	10x30	32x2	40
11085GTB	85x24	105	35	12x45	32x2	50
11080GTB	80x27	108	35	12x45	42x2	50
11100GTB	100x27	128	38	12x45	42x2.5	60
11125GTB	125x34	152	33	12x45	42x2.5	100
11150GTB	150x40	180	46	16x40	57x2.75	110
11160GTB	160x40	190	48	16x40	57x2.75	130
11200GTB	200x46	230	48	16x40	57x2.75	150
11250GTB	250x50	280	48	16x40	57x2.75	180

Stem Swivel Caster

ART-NO.						Kg
11075GS	75x23	96	32	28x40	32x2	40
11085GS	85x24	105	40	28x40	32x2	50
11080GS	80x27	108	40	28x40	42x2	50
11100GS	100x27	128	37	28x40	42x2.5	60
11125GS	125x34	152	35	28x40	42x2.5	100
11150GS	150x40	180	43	28x40	57x2.75	110
11160GS	160x40	190	43	28x40	57x2.75	130
11200GS	200x46	230	49	28x40	57x2.75	150
11250GS	250x50	280	55	28x40	57x2.75	180

Stem Double Brake Caster

ART-NO.						Kg
11075GSB	75x23	96	32	28x40	32x2	40
11085GSB	85x24	105	35	28x40	32x2	50
11080GSB	80x27	108	35	28x40	42x2	50
11100GSB	100x27	128	38	28x40	42x2.5	60
11125GSB	125x34	152	33	28x40	42x2.5	100
11150GSB	150x40	180	46	28x40	57x2.75	110
11160GSB	160x40	190	48	28x40	57x2.75	130
11200GSB	200x46	230	48	28x40	57x2.75	150
11250GSB	250x50	280	48	28x40	57x2.75	180

11 Industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Plastic core black rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5 °C~50°C

Rad color core available

ART-NO.					Kg
11075PHSW	75x23	12x30	8x32		40
11085PHSW	85x24	12x30	8x32		50
11080PHSW	80x27	12x30	8x42		50
11100PHSW	100x27	12x40	8x42		60
11125PHSW	125x34	15x40	10x42		100
11160PHSW	160x40	20x55	12x57		130
11200PHSW	200x46	20x55	12x57		150

Swivel Caster

ART-NO.								Kg
11075PH	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085PH	85x24	105	40	102x84x2	80x60	14x9	32x2	50
11080PH	80x27	108	40	102x84x2	80x60	14x9	42x2	50
11100PH	100x27	130	37	102x84x2.5	80x60	14x9	42x2.5	60
11125PH	125x34	155	35	102x84x2.5	80x60	14x9	42x2.5	100
11160PH	160x40	195	43	135x105x2.75	105x80	16x11	57x2.75	130
11200PH	200x46	235	49	135x105x2.75	105x80	16x11	57x2.75	150

Fixed Caster

ART-NO.							Kg
11075PHF	75x23	97	84x72	62x50	11x8.5	32x2	40
11085PHF	85x24	105	102x84	80x60	14x9	32x2	50
11080PHF	80x27	108	102x84	80x60	14x9	42x2	50
11100PHF	100x27	130	102x84	80x60	14x9	42x2.5	60
11125PHF	125x34	155	102x84	80x60	14x9	42x2.5	100
11160PHF	160x40	195	135x105	105x80	16x11	57x2.75	130
11200PHF	200x46	235	135x105	105x80	16x11	57x2.75	150

Double Brake Caster

ART-NO.								Kg
11075PHB	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085PHB	85x24	105	35	102x84x2	80x60	14x9	32x2	50
11080PHB	80x27	108	35	102x84x2	80x60	14x9	42x2	50
11100PHB	100x27	130	38	102x84x2.5	80x60	14x9	42x2.5	60
11125PHB	125x34	155	33	102x84x2.5	80x60	14x9	42x2.5	100
11160PHB	160x40	195	48	135x105x2.75	105x80	16x11	57x2.75	130
11200PHB	200x46	235	48	135x105x2.75	105x80	16x11	57x2.75	150

Bolt Hole Swivel Caster

ART-NO.						Kg
11075PHD	75x23	96	32	10.5	32x2	40
11085PHD	85x24	105	40	12.5	32x2	50
11080PHD	80x27	108	40	12.5	42x2	50
11100PHD	100x27	128	37	12.5	42x2.5	60
11125PHD	125x34	152	35	12.5	42x2.5	100
11160PHD	160x40	190	43	16.5	57x2.75	130
11200PHD	200x46	230	49	16.5	57x2.75	150

11 Industrial caster

FLYWHEEL

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075PHDB	75x23	96	32	10.5	32x2	40
11085PHDB	85x24	105	35	12.5	32x2	50
11080PHDB	80x27	108	35	12.5	42x2	50
11100PHDB	100x27	128	38	12.5	42x2.5	60
11125PHDB	125x34	152	33	12.5	42x2.5	100
11160PHDB	160x40	190	48	16.5	57x2.75	130
11200PHDB	200x46	230	48	16.5	57x2.75	150

Threaded Stem Swivel Caster

ART-NO.						Kg
11075PHT	75x23	96	32	10x30	32x2	40
11085PHT	85x24	105	40	12x45	32x2	50
11080PHT	80x27	108	40	12x45	42x2	50
11100PHT	100x27	128	37	12x45	42x2.5	60
11125PHT	125x34	152	35	12x45	42x2.5	100
11160PHT	160x40	190	43	16x40	57x2.75	130
11200PHT	200x46	230	49	16x40	57x2.75	150

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075PHTB	75x23	96	32	10x30	32x2	40
11085PHTB	85x24	105	35	12x45	32x2	50
11080PHTB	80x27	108	35	12x45	42x2	50
11100PHTB	100x27	128	38	12x45	42x2.5	60
11125PHTB	125x34	152	33	12x45	42x2.5	100
11160PHTB	160x40	190	48	16x40	57x2.75	130
11200PHTB	200x46	230	48	16x40	57x2.75	150

Stem Swivel Caster

ART-NO.						Kg
11075PHS	75x23	96	32	28x40	32x2	40
11085PHS	85x24	105	40	28x40	32x2	50
11080PHS	80x27	108	40	28x40	42x2	50
11100PHS	100x27	128	37	28x40	42x2.5	60
11125PHS	125x34	152	35	28x40	42x2.5	100
11160PHS	160x40	190	43	28x40	57x2.75	130
11200PHS	200x46	230	49	28x40	57x2.75	150

Stem Double Brake Caster

ART-NO.						Kg
11075PHSB	75x23	96	32	28x40	32x2	40
11085PHSB	85x24	105	35	28x40	32x2	50
11080PHSB	80x27	108	35	28x40	42x2	50
11100PHSB	100x27	128	38	28x40	42x2.5	60
11125PHSB	125x34	152	33	28x40	42x2.5	100
11160PHSB	160x40	190	48	28x40	57x2.75	130
11200PHSB	200x46	230	48	28x40	57x2.75	150

75mm plastic brake pedal is available

11 Industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Plastic core gray rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: - 5°C~50°C

ART-NO.					Kg
11075PHGSW	75x23	12x30	8x32		40
11085PHGSW	85x24	12x30	8x32		50
11080PHGSW	80x27	12x41	8x42		50
11100PHGSW	100x27	12x40	8x42		60
11125PHGSW	125x34	15x40	10x42		100
11160PHGSW	160x40	20x55	12x57		130
11200PHGSW	200x46	20x55	12x57		150

Swivel Caster

ART-NO.								Kg
11075PHG	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085PHG	85x24	105	40	102x84x2	80x60	14x9	32x2	50
11080PHG	80x27	108	40	102x84x2	80x60	14x9	42x2	50
11100PHG	100x27	130	37	102x84x2.5	80x60	14x9	42x2.5	60
11125PHG	125x34	155	35	102x84x2.5	80x60	14x9	42x2.5	100
11160PHG	160x40	195	43	135x105x2.75	105x80	16x11	57x2.75	130
11200PHG	200x46	235	49	135x105x2.75	105x80	16x11	57x2.75	150

Fixed Caster

ART-NO.							Kg
11075PHGF	75x23	97	84x72	62x50	11x8.5	32x2	40
11085PHGF	85x24	105	102x84	80x60	14x9	32x2	50
11080PHGF	80x27	108	102x84	80x60	14x9	42x2	50
11100PHGF	100x27	130	102x84	80x60	14x9	42x2.5	60
11125PHGF	125x34	155	102x84	80x60	14x9	42x2.5	100
11160PHGF	160x40	195	135x105	105x80	16x11	57x2.75	130
11200PHGF	200x46	235	135x105	105x80	16x11	57x2.75	150

Double Brake Caster

ART-NO.								Kg
11075PHGB	75x23	97	32	84x72x2	62x50	11x8.5	32x2	40
11085PHGB	85x24	105	35	102x84x2	80x60	14x9	32x2	50
11080PHGB	80x27	108	35	102x84x2	80x60	14x9	42x2	50
11100PHGB	100x27	130	38	102x84x2.5	80x60	14x9	42x2.5	60
11125PHGB	125x34	155	33	102x84x2.5	80x60	14x9	42x2.5	100
11160PHGB	160x40	195	48	135x105x2.75	105x80	16x11	57x2.75	130
11200PHGB	200x46	235	48	135x105x2.75	105x80	16x11	57x2.75	150

Bolt Hole Swivel Caster

ART-NO.						Kg
11075PHGD	75x23	96	32	10.5	32x2	40
11085PHGD	85x24	105	40	12.5	32x2	50
11080PHGD	80x27	108	40	12.5	42x2	50
11100PHGD	100x27	128	37	12.5	42x2.5	60
11125PHGD	125x34	152	35	12.5	42x2.5	100
11160PHGD	160x40	190	43	16.5	57x2.75	130
11200PHGD	200x46	230	49	16.5	57x2.75	150

11 Industrial caster

FLYWHEEL

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075PHGDB	75x23	96	32	10.5	32x2	40
11085PHGDB	85x24	105	35	12.5	32x2	50
11080PHGDB	80x27	108	35	12.5	42x2	50
11100PHGDB	100x27	128	38	12.5	42x2.5	60
11125PHGDB	125x34	152	33	12.5	42x2.5	100
11160PHGDB	160x40	190	48	16.5	57x2.75	130
11200PHGDB	200x46	230	48	16.5	57x2.75	150

Threaded Stem Swivel Caster

ART-NO.						Kg
11075PHGT	75x23	96	32	10x30	32x2	40
11085PHGT	85x24	105	40	12x45	32x2	50
11080PHGT	80x27	108	40	12x45	42x2	50
11100PHGT	100x27	128	37	12x45	42x2.5	60
11125PHGT	125x34	152	35	12x45	42x2.5	100
11160PHGT	160x40	190	43	16x40	57x2.75	130
11200PHGT	200x46	230	49	16x40	57x2.75	150

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075PHGTB	75x23	96	32	10x30	32x2	40
11085PHGTB	85x24	105	35	12x45	32x2	50
11080PHGTB	80x27	108	35	12x45	42x2	50
11100PHGTB	100x27	128	38	12x45	42x2.5	60
11125PHGTB	125x34	152	33	12x45	42x2.5	100
11160PHGTB	160x40	190	48	16x40	57x2.75	130
11200PHGTB	200x46	230	48	16x40	57x2.75	150

Stem Swivel Caster

ART-NO.						Kg
11075PHGS	75x23	96	32	28x40	32x2	40
11085PHGS	85x24	105	40	28x40	32x2	50
11080PHGS	80x27	108	40	28x40	42x2	50
11100PHGS	100x27	128	37	28x40	42x2.5	60
11125PHGS	125x34	152	35	28x40	42x2.5	100
11160PHGS	160x40	190	43	28x40	57x2.75	130
11200PHGS	200x46	230	49	28x40	57x2.75	150

Stem Double Brake Caster

ART-NO.						Kg
11075PHGSB	75x23	96	32	28x40	32x2	40
11085PHGSB	85x24	105	35	28x40	32x2	50
11080PHGSB	80x27	108	35	28x40	42x2	50
11100PHGSB	100x27	128	38	28x40	42x2.5	60
11125PHGSB	125x34	152	33	28x40	42x2.5	100
11160PHGSB	160x40	190	48	28x40	57x2.75	130
11200PHGSB	200x46	230	48	28x40	57x2.75	150

11 Industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Plastic
Bearing type: Roller bearing
Temperature range: -5°C~80°C

Without threadguard option

ART-NO.					Kg
11075PSW	75x23	12x30	8x32	---	70
11080PSW	80x30	12x41	8x42	---	130
11100PSW	100x27	12x40	8x42		100
11125PSW	125x34	15x40	10x42		130
11160PSW	160x40	20x55	12x57		160
11200PSW	200x46	20x55	12x57		200

Swivel Caster

ART-NO.								Kg
11075P	75x23	97	32	84x72x2	62x50	11x8.5	32x2	70
11080P	80x30	108	37	102x84x2	80x60	14x9	42x2	100
11100P	100x27	130	37	102x84x2.5	80x60	14x9	42x2.5	100
11125P	125x34	155	35	102x84x2.5	80x60	14x9	42x2.5	130
11160P	160x40	195	43	135x105x2.75	105x80	16x11	57x2.75	160
11200P	200x46	235	49	135x105x2.75	105x80	16x11	57x2.75	200

Fixed Caster

ART-NO.							Kg
11075PF	75x23	97	84x72	62x50	11x8.5	32x2	70
11080PF	80x30	108	102x84	80x60	14x9	42x2	100
11100PF	100x27	130	102x84	80x60	14x9	42x2.5	100
11125PF	125x34	155	102x84	80x60	14x9	42x2.5	130
11160PF	160x40	195	135x105	105x80	16x11	57x2.75	160
11200PF	200x46	235	135x105	105x80	16x11	57x2.75	200

Double Brake Caster

ART-NO.								Kg
11075PB	75x23	97	32	84x72x2	62x50	11x8.5	32x2	70
11080PB	80x30	108	37	102x84x2	80x60	14x9	42x2	100
11100PB	100x27	130	38	102x84x2.5	80x60	14x9	42x2.5	100
11125PB	125x34	155	33	102x84x2.5	80x60	14x9	42x2.5	130
11160PB	160x40	195	48	135x105x2.75	105x80	16x11	57x2.75	160
11200PB	200x46	235	48	135x105x2.75	105x80	16x11	57x2.75	200

Bolt Hole Swivel Caster

ART-NO.						Kg
11075PD	75x23	96	32	10.5	32x2	70
11080PD	80x30	108	37	12.5	42x2	100
11100PD	100x27	128	37	12.5	42x2.5	100
11125PD	125x34	152	35	12.5	42x2.5	130
11160PD	160x40	190	43	16.5	57x2.75	160
11200PD	200x46	230	49	16.5	57x2.75	200

11 Industrial caster

FLYWHEEL

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075PDB	75x23	96	32	10.5	32x2	70
11080PDB	80x30	108	37	12.5	42x2	100
11100PDB	100x27	128	38	12.5	42x2.5	100
11125PDB	125x34	152	33	12.5	42x2.5	130
11160PDB	160x40	190	48	16.5	57x2.75	160
11200PDB	200x46	230	48	16.5	57x2.75	200

Threaded Stem Swivel Caster

ART-NO.						Kg
11075PT	75x23	96	32	10x30	32x2	70
11080PT	80x30	108	37	12x45	42x2	100
11100PT	100x27	128	37	12x45	42x2.5	100
11125PT	125x34	152	35	12x45	42x2.5	130
11160PT	160x40	190	43	16x40	57x2.75	160
11200PT	200x46	230	49	16x40	57x2.75	200

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075PTB	75x23	96	32	10x30	32x2	70
11080PTB	80x30	108	37	12x45	42x2	100
11100PTB	100x27	128	38	12x45	42x2.5	100
11125PTB	125x34	152	33	12x45	42x2.5	130
11160PTB	160x40	190	48	16x40	57x2.75	160
11200PTB	200x46	230	48	16x40	57x2.75	200

Stem Swivel Caster

ART-NO.						Kg
11075PS	75x23	96	32	28x40	32x2	70
11080PS	80x30	108	37	28x40	42x2	100
11100PS	100x27	128	37	28x40	42x2.5	100
11125PS	125x34	152	35	28x40	42x2.5	130
11160PS	160x40	190	43	28x40	57x2.75	160
11200PS	200x46	230	49	28x40	57x2.75	200

Stem Double Brake Caster

ART-NO.						Kg
11075PSB	75x23	96	32	28x40	32x2	70
11080PSB	80x30	108	37	28x40	42x2	100
11100PSB	100x27	128	38	28x40	42x2.5	100
11125PSB	125x34	152	33	28x40	42x2.5	130
11160PSB	160x40	190	48	28x40	57x2.75	160
11200PSB	200x46	230	48	28x40	57x2.75	200

11 Industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Nylon
Bearing type: Roller bearing
Temperature range: -15°C~80°C

ART-NO.					Kg
11075NYSW	75x23	12x30	8x32	— — —	70
11080NYSW	80x30	12x41	8x42	— — —	200
11100NYSW	100x27	12x40	8x42		100
11125NYSW	125x34	15x40	10x42		130
11160NYSW	160x40	20x55	12x57		160
11200NYSW	200x46	20x55	12x57		200

Swivel Caster

ART-NO.								Kg
11075NY	75x23	97	32	84x72x2	62x50	11x8.5	32x2	70
11080NY	80x30	108	37	102x84x2	80x60	14x9	42x2	100
11100NY	100x27	130	37	102x84x2.5	80x60	14x9	42x2.5	100
11125NY	125x34	155	35	102x84x2.5	80x60	14x9	42x2.5	130
11160NY	160x40	195	43	135x105x2.75	105x80	16x11	57x2.75	160
11200NY	200x46	235	49	135x105x2.75	105x80	16x11	57x2.75	200

Fixed Caster

ART-NO.							Kg
11075NYF	75x23	97	84x72	62x50	11x8.5	32x2	70
11080NYF	80x30	108	102x84	80x60	14x9	42x2	100
11100NYF	100x27	130	102x84	80x60	14x9	42x2.5	100
11125NYF	125x34	155	102x84	80x60	14x9	42x2.5	130
11160NYF	160x40	195	135x105	105x80	16x11	57x2.75	160
11200NYF	200x46	235	135x105	105x80	16x11	57x2.75	200

Double Brake Caster

ART-NO.								Kg
11075NYB	75x23	97	32	84x72x2	62x50	11x8.5	32x2	70
11080NYB	80x30	108	37	102x84x2	80x60	14x9	42x2	100
11100NYB	100x27	130	38	102x84x2.5	80x60	14x9	42x2.5	100
11125NYB	125x34	155	33	102x84x2.5	80x60	14x9	42x2.5	130
11160NYB	160x40	195	48	135x105x2.75	105x80	16x11	57x2.75	160
11200NYB	200x46	235	48	135x105x2.75	105x80	16x11	57x2.75	200

Bolt Hole Swivel Caster

ART-NO.						Kg
11075NYD	75x23	96	32	10.5	32x2	70
11080NYD	80x30	108	37	12.5	42x2	100
11100NYD	100x27	128	37	12.5	42x2.5	100
11125NYD	125x34	152	35	12.5	42x2.5	130
11160NYD	160x40	190	43	16.5	57x2.75	160
11200NYD	200x46	230	49	16.5	57x2.75	200

11 Industrial caster

FLYWHEEL

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075NYDB	75x23	96	32	10.5	32x2	70
11080NYDB	80x30	108	37	12.5	42x2	100
11100NYDB	100x27	128	38	12.5	42x2.5	100
11125NYDB	125x34	152	33	12.5	42x2.5	130
11160NYDB	160x40	190	48	16.5	57x2.75	160
11200NYDB	200x46	230	48	16.5	57x2.75	200

Threaded Stem Swivel Caster

ART-NO.						Kg
11075NYT	75x23	96	32	10x30	32x2	70
11080NYT	80x30	108	37	12x45	42x2	100
11100NYT	100x27	128	37	12x45	42x2.5	100
11125NYT	125x34	152	35	12x45	42x2.5	130
11160NYT	160x40	190	43	16x40	57x2.75	160
11200NYT	200x46	230	49	16x40	57x2.75	200

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075NYTB	75x23	96	32	10x30	32x2	70
11080NYTB	80x30	108	37	12x45	42x2	100
11100NYTB	100x27	128	38	12x45	42x2.5	100
11125NYTB	125x34	152	33	12x45	42x2.5	130
11160NYTB	160x40	190	48	16x40	57x2.75	160
11200NYTB	200x46	230	48	16x40	57x2.75	200

Stem Swivel Caster

ART-NO.						Kg
11075NYS	75x23	96	32	28x40	32x2	70
11080NYS	80x30	108	37	28x40	42x2	100
11100NYS	100x27	128	37	28x40	42x2.5	100
11125NYS	125x34	152	35	28x40	42x2.5	130
11160NYS	160x40	190	43	28x40	57x2.75	160
11200NYS	200x46	230	49	28x40	57x2.75	200

Stem Double Brake Caster

ART-NO.						Kg
11075NYSB	75x23	96	32	28x40	32x2	70
11080NYSB	80x30	108	37	28x40	42x2	100
11100NYSB	100x27	128	38	28x40	42x2.5	100
11125NYSB	125x34	152	33	28x40	42x2.5	130
11160NYSB	160x40	190	48	28x40	57x2.75	160
11200NYSB	200x46	230	48	28x40	57x2.75	200

11 Industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Elastic rubber,nylon core
nonmarking
Hardness: 70±3 Shore A
Bearing type: Roller bearing
Temperature range: -5°C~70°C
Good shock resistance and wear and tear

ART-NO.					Kg
11075BLSW	75x26	12x30	8x32		60
11080BLSW	80x35	12x41	8x42		120
11100BLSW	100x33	12x38	8x42		130
11125BLSW	125x34	12x38	10x42		180
11160BLSW	160x48	20x56	12x57		350
11200BLSW	200x48	20x56	12x57		400

Swivel Caster

ART-NO.								Kg
11075BL	75x26	97	32	84x72x2	62x50	11x8.5	32x2	60
11080BL	80x35	108	37	102x84x2	80x60	14x9	42x2	100
11100BL	100x33	130	37	102x84x2.5	80x60	14x9	42x2.5	130
11125BL	125x34	155	35	102x84x2.5	80x60	14x9	42x2.5	180
11160BL	160x48	195	43	135x105x2.75	105x80	16x11	57x2.75	250
11200BL	200x48	235	49	135x105x2.75	105x80	16x11	57x2.75	300

Fixed Caster

ART-NO.							Kg
11075BLF	75x26	97	84x72	62x50	11x8.5	32x2	60
11080BLF	80x35	108	102x84	80x60	14x9	42x2	100
11100BLF	100x33	130	102x84	80x60	14x9	42x2.5	130
11125BLF	125x34	155	102x84	80x60	14x9	42x2.5	180
11160BLF	160x48	195	135x105	105x80	16x11	57x2.75	250
11200BLF	200x48	235	135x105	105x80	16x11	57x2.75	300

Double Brake Caster

ART-NO.								Kg
11075BLB	75x26	97	32	84x72x2	62x50	11x8.5	32x2	60
11080BLB	80x35	108	37	102x84x2	80x60	14x9	42x2	100
11100BLB	100x33	130	38	102x84x2.5	80x60	14x9	42x2.5	130
11125BLB	125x34	155	33	102x84x2.5	80x60	14x9	42x2.5	180
11160BLB	160x48	195	48	135x105x2.75	105x80	16x11	57x2.75	250
11200BLB	200x48	235	48	135x105x2.75	105x80	16x11	57x2.75	300

Bolt Hole Swivel Caster

ART-NO.						Kg
11075BLD	75x26	96	32	10.5	32x2	60
11080BLD	80x35	108	37	12.5	42x2	100
11100BLD	100x33	128	37	12.5	42x2.5	130
11125BLD	125x34	152	35	12.5	42x2.5	180
11160BLD	160x48	190	43	16.5	57x2.75	250
11200BLD	200x48	230	49	16.5	57x2.75	300

11 Industrial caster

FLYWHEEL

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075BLDB	75x26	96	32	10.5	32x2	60
11080BLDB	80x35	108	37	12.5	42x2	100
11100BLDB	100x33	128	38	12.5	42x2.5	130
11125BLDB	125x34	152	33	12.5	42x2.5	180
11160BLDB	160x48	190	48	16.5	57x2.75	250
11200BLDB	200x48	230	48	16.5	57x2.75	300

Threaded Stem Swivel Caster

ART-NO.						Kg
11075BLT	75x26	96	32	10x30	32x2	60
11080BLT	80x35	108	37	12x45	42x2	100
11100BLT	100x33	128	37	12x45	42x2.5	130
11125BLT	125x34	152	35	12x45	42x2.5	180
11160BLT	160x48	190	43	16x40	57x2.75	250
11200BLT	200x48	230	49	16x40	57x2.75	300

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075BLTB	75x26	96	32	10x30	32x2	60
11080BLTB	80x35	108	37	12x45	42x2	100
11100BLTB	100x33	128	38	12x45	42x2.5	130
11125BLTB	125x34	152	33	12x45	42x2.5	180
11160BLTB	160x48	190	48	16x40	57x2.75	250
11200BLTB	200x48	230	48	16x40	57x2.75	300

Stem Swivel Caster

ART-NO.						Kg
11075BLS	75x26	96	32	28x40	32x2	60
11080BLS	80x35	108	37	28x40	42x2	100
11100BLS	100x33	128	37	28x40	42x2.5	130
11125BLS	125x34	152	35	28x40	42x2.5	180
11160BLS	160x48	190	43	28x40	57x2.75	250
11200BLS	200x48	230	49	28x40	57x2.75	300

Stem Double Brake Caster

ART-NO.						Kg
11075BLSB	75x26	96	32	28x40	32x2	60
11080BLSB	80x35	108	37	28x40	42x2	100
11100BLSB	100x33	128	38	28x40	42x2.5	130
11125BLSB	125x34	152	33	28x40	42x2.5	180
11160BLSB	160x48	190	48	28x40	57x2.75	250
11200BLSB	200x48	230	48	28x40	57x2.75	300

11 Industrial caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:

Materials: Polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision ball bearing
Temperature range: - 5 °C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.				Kg
11075PUSW	75x25	8x32	6201	50
11100PUSW	100x32	8x42	6202	80
11125PUSW	125x32	10x42	6202	100

Swivel Caster

ART-NO.								Kg
11075PU	75x25	97	32	84x72x2	62x50	11x8.5	32x2	50
11100PU	100x32	130	37	102x84x2.5	80x60	14x9	42x2.5	80
11125PU	125x32	155	35	102x84x2.5	80x60	14x9	42x2.5	100

Fixed Caster

ART-NO.							Kg
11075PUF	75x25	97	84x72	62x50	11x8.5	32x2	50
11100PUF	100x32	130	102x84	80x60	14x9	42x2.5	80
11125PUF	125x32	155	102x84	80x60	14x9	42x2.5	100

Double Brake Caster

ART-NO.								Kg
11075PUB	75x25	97	32	84x72x2	62x50	11x8.5	32x2	50
11100PUB	100x32	130	38	102x84x2.5	80x60	14x9	42x2.5	80
11125PUB	125x32	155	33	102x84x2.5	80x60	14x9	42x2.5	100

Bolt Hole Swivel Caster

ART-NO.						Kg
11075PUD	75x25	96	32	10.5	32x2	50
11100PUD	100x32	128	37	12.5	42x2.5	80
11125PUD	125x32	152	35	12.5	42x2.5	100

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075PUDB	75x25	96	32	10.5	32x2	50
11100PUDB	100x32	128	38	12.5	42x2.5	80
11125PUDB	125x32	152	33	12.5	42x2.5	100

11 Industrial caster

FLYWHEEL

AVAILABLE IN Inox 304 STAINLESS STEEL

Threaded Stem Swivel Caster

ART-NO.						Kg
11075PUT	75x25	96	32	10x30	32x2	50
11100PUT	100x32	128	37	12x45	42x2.5	80
11125PUT	125x32	152	35	12x45	42x2.5	100

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075PUTB	75x25	96	32	10x30	32x2	50
11100PUTB	100x32	128	38	12x45	42x2.5	80
11125PUTB	125x32	152	33	12x45	42x2.5	100

Stem Swivel Caster

ART-NO.						Kg
11075PUS	75x25	96	32	28x40	32x2	50
11100PUS	100x32	128	37	28x40	42x2.5	80
11125PUS	125x32	152	35	28x40	42x2.5	100

Stem Double Brake Caster

ART-NO.						Kg
11075PUSB	75x25	96	32	28x40	32x2	50
11100PUSB	100x32	128	38	28x40	42x2.5	80
11125PUSB	125x32	152	33	28x40	42x2.5	100

Wheel options:

11XXXTPR
4",5" Ball bearing TPR wheel

11XXXPP
4",5" Ball bearing PP wheel

11 Industrial caster

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Hard rubber
Bearing type: Delrin bearing
Hardness: 100 Shore A
Temperature range: -5℃~50℃

ART-NO.				Kg
11075HRSW	75x25	8x31		70
11100HRSW	100x32	8x41		80
11125HRSW	125x32	10x41		100

Swivel Caster

ART-NO.								Kg
11075HR	75x25	97	32	84x72x2	62x50	11x8.5	32x2	70
11100HR	100x32	130	37	102x84x2.5	80x60	14x9	42x2.5	80
11125HR	125x32	155	35	102x84x2.5	80x60	14x9	42x2.5	100

Fixed Caster

ART-NO.							Kg
11075HRF	75x25	97	84x72	62x50	11x8.5	32x2	70
11100HRF	100x32	130	102x84	80x60	14x9	42x2.5	80
11125HRF	125x32	155	102x84	80x60	14x9	42x2.5	100

Double Brake Caster

ART-NO.								Kg
11075HRB	75x25	97	32	84x72x2	62x50	11x8.5	32x2	70
11100HRB	100x32	130	38	102x84x2.5	80x60	14x9	42x2.5	80
11125HRB	125x32	155	33	102x84x2.5	80x60	14x9	42x2.5	100

Bolt Hole Swivel Caster

ART-NO.						Kg
11075HRD	75x25	96	32	10.5	32x2	70
11100HRD	100x32	128	37	12.5	42x2.5	80
11125HRD	125x32	152	35	12.5	42x2.5	100

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075HRDB	75x25	96	32	10.5	32x2	70
11100HRDB	100x32	128	38	12.5	42x2.5	80
11125HRDB	125x32	152	33	12.5	42x2.5	100

11 Industrial caster

Threaded Stem Swivel Caster

ART-NO.						Kg
11075HRT	75x25	96	32	10x30	32x2	70
11100HRT	100x32	128	37	12x45	42x2.5	80
11125HRT	125x32	152	35	12x45	42x2.5	100

Threaded Stem Double Brake Caster

ART-NO.						Kg
11075HRTB	75x25	96	32	10x30	32x2	70
11100HRTB	100x32	128	38	12x45	42x2.5	80
11125HRTB	125x32	152	33	12x45	42x2.5	100

Stem Swivel Caster

ART-NO.						Kg
11075HRS	75x25	96	32	28x40	32x2	70
11100HRS	100x32	128	37	28x40	42x2.5	80
11125HRS	125x32	152	35	28x40	42x2.5	100

Stem Double Brake Caster

ART-NO.						Kg
11075HRSB	75x25	96	32	28x40	32x2	70
11100HRSB	100x32	128	38	28x40	42x2.5	80
11125HRSB	125x32	152	33	28x40	42x2.5	100

Wheel:
Materials:Cast iron
Bearing type: Plain bearing

Swivel Caster

ART-NO.									Kg
11075C	75x26	12x30	97	32	84x72x2	62x50	11x8.5	32x2	40
11085C	85x26	12x30	105	40	102x84x2	80x60	14x9	32x2	50
11100C	100x27	12x40	130	37	102x84x2.5	80x60	14x9	42x2.5	60
11125C	125x32	15x40	155	35	102x84x2.5	80x60	14x9	42x2.5	100
11160C	160x39	20x55	195	43	135x105x2.75	105x80	16x11	57x2.75	130
11200C	200x39	20x55	235	49	135x105x2.75	105x80	16x11	57x2.75	150

Fixed Caster

ART-NO.									Kg
11075CF	75x26	12x30	97	84x72	62x50	11x8.5	32x2	40
11085CF	85x26	12x30	105	102x84	80x60	14x9	32x2	50
11100CF	100x27	12x40	130	102x84	80x60	14x9	42x2.5	60
11125CF	125x32	15x40	155	102x84	80x60	14x9	42x2.5	100
11160CF	160x39	20x55	195	135x105	105x80	16x11	57x2.75	130
11200CF	200x39	20x55	235	135x105	105x80	16x11	57x2.75	150

14 European type indoor caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head, dustproof seal

Wheel:
Materials: Elastic rubber,nylon core
nonmarking
Hardness: 70±3 Shore A
Bearing type: Roller bearing
Temperature range: -5°C~70°C
Good shock resistance and wear and tear

ART-NO.					Kg
14100BLSW	100x33	12x38	8x40		130
14125BLSW	125x34	12x38	10x40		180

Swivel Caster

ART-NO.								Kg
14100BL	100x33	130	38	102x84	80x60	14x9	40x2	130
14125BL	125x34	154	38	102x84	80x60	14x9	40x2	180

Fixed Caster

ART-NO.								Kg
14100BLF	100x33	130	38	102x84	80x60	14x9	40x2	130
14125BLF	125x34	154	38	102x84	80x60	14x9	40x2	180

Double Brake Caster

ART-NO.								Kg
14100BLB	100x33	130	38	102x84	80x60	14x9	40x2	130
14125BLB	125x34	154	38	102x84	80x60	14x9	40x2	180

Bolt Hole Swivel Caster

ART-NO.						Kg
14100BLD	100x33	128	38	12.5	40x2	130
14125BLD	125x34	154	38	12.5	40x2	180

14 European type indoor caster

FLYWHEEL

Blot Hole Double Brake Caster

ART-NO.						Kg
14100BLDB	100x33	130	38	12.5	40x2	130
14125BLDB	125x34	154	38	12.5	40x2	180

Threaded Stem Swivel Caster

ART-NO.						Kg
14100BLT	100x33	130	38	12x45	40x2	130
14125BLT	125x34	154	38	12x45	40x2	180

Threaded Stem Double Brake Caster

ART-NO.						Kg
14100BLTB	100x33	130	38	12x45	40x2	130
14125BLTB	125x34	154	38	12x45	40x2	180

Stem Swivel Caster

ART-NO.						Kg
14100BLS	100x33	130	38	28X40	40x2	130
14125BLS	125x34	154	38	28X40	40x2	180

Stem Double Brake Caster

ART-NO.						Kg
14100BLSB	100x33	130	38	28X40	40x2	130
14125BLSB	125x34	154	38	28X40	40x2	180

Wheel Options:

14XXXPU

14XXXTPR

14XXXPP

15 Garbage container caster

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Steel core black rubber
Plastic core rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5℃~50℃°

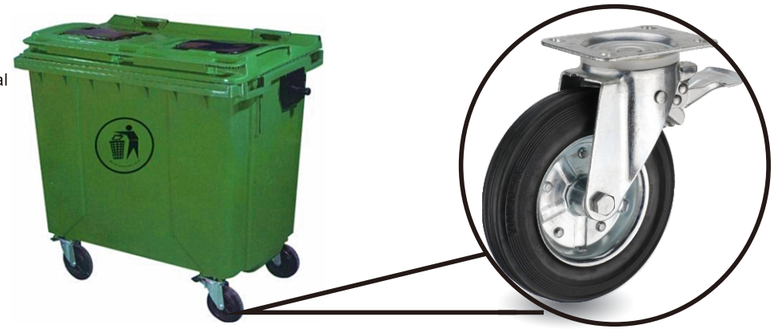

Swivel Caster

ART-NO.									Kg
15160	160x40	12x61	197	53. 5	135x110x3. 5	105x80	11x18	61x3.5	160
15200	200x50	12x61	238	57	135x110x3. 5	105x80	11x18	61x3.5	210

Rear Brake Caster

ART-NO.								Kg
15160B	160x40	12x61	197	135x110x3. 5	105x80	11x18	61x3.5	160
15200B	200x50	12x61	238	135x110x3. 5	105x80	11x18	61x3.5	210

Swivel Caster

ART-NO.									Kg
15160PH	160x40	12x61	197	53. 5	135x110x3. 5	105x80	11x18	61x3.5	160
15200PH	200x50	12x61	238	57	135x110x3. 5	105x80	11x18	61x3.5	210

Rear Brake Caster

ART-NO.								Kg
15160PHB	160x40	12x61	197	135x110x3. 5	105x80	11x18	61x3.5	160
15200PHB	200x50	12x61	238	135x110x3. 5	105x80	11x18	61x3.5	210

LT Kingpinless medium duty caster

Housing:
Made of pressed steel,zinc plated,

Wheel:
Materials: Nylon

Temperature range: -15°C~80°C

PP Wheel is available

Swivel Caster

ART-NO.										Kg
LT075NY	75x27	10x41	113. 5	33. 5	135x111X3	110x72	20x11	46x3	——	150
LT100NY	100x32	10x41	137	34. 5	135x111X3	110x72	20x11	46x3	——	200
LT125NY	125x32	10x41	160. 5	34. 5	135x111X3	110x72	20x11	46x3	——	250

Side Brake Caster

ART-NO.										Kg
LT075NYB	75x27	10x41	113. 5	33. 5	135x111X3	110x72	20x11	46x3	——	150
LT100NYB	100x32	10x41	137	34. 5	135x111X3	110x72	20x11	46x3	——	200
LT125NYB	125x32	10x41	160. 5	34. 5	135x111X3	110x72	20x11	46x3	——	250

Bolt Hole Caster

ART-NO.								Kg
LT075NYD	75x27	10x41	108	33. 5	12. 9	46x3	——	150
LT100NYD	100x32	10x41	131. 5	34. 5	12. 9	46x3	——	200
LT125NYD	125x32	10x41	154. 5	34. 5	12. 9	46x3	——	250

Bolt Hole Side Brake Caster

ART-NO.								Kg
LT075NYDB	75x27	10x41	108	33. 5	12. 9	46x3	——	150
LT100NYDB	100x32	10x41	131. 5	34. 5	12. 9	46x3	——	200
LT125NYDB	125x32	10x41	154. 5	34. 5	12. 9	46x3	——	250

Stem Swivel Caster

ART-NO.									Kg
LT075NYS	75x27	10x41	111	33. 5	100	32	46x3	——	150
LT100NYS	100x32	10x41	134. 5	34. 5	100	32	46x3	——	200
LT125NYS	125x32	10x41	157. 5	34. 5	100	32	46x3	——	250

Stem Swivel Side Brake Caster

ART-NO.									Kg
LT075NYSB	75x27	10x41	111	33. 5	100	32	46x3	——	150
LT100NYSB	100x32	10x41	134. 5	34. 5	100	32	46x3	——	200
LT125NYSB	125x32	10x41	157. 5	34. 5	100	32	46x3	——	250

20 Low profile caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, single ballrace swivel head

Wheel:

Materials: Hard rubber

Bearing type: Delrin bearing

Temperature range: -5℃~50℃



Double Ballrace Swivel Head is Available Use"N" before code no.

ART-NO.				Kg
20050ESW	50x23	6x25	——	40
20065ESW	64x27	8x34	——	50
20075ESW	75x30	10x41	——	60
20100ESW	100x32	10x50	——	80

Swivel Caster

ART-NO.								Kg
20050E	50x23	63	18	67x48x2	54x24	6.2	27x2	40
20065E	64x27	84	22	95x70x2.5	76x44.5	9	35x2.5	50
20075E	75x30	98	22	105x80x2.5	83x60	11x8.5	42x2.5	60
20100E	100x32	126	31	128x105x3	102x78	13x10	51x2.5	80

Fixed Caster

ART-NO.							Kg
20050EF	50x23	63	67x48	54x24	6.2	27x2	40
20065EF	64x27	84	112x57	89x27	8.5	35x2.5	50
20075EF	75x30	98	126x64	102x30	8.5	42x2.5	60
20100EF	100x32	126	155x73	127x44	10.5	51x3	80

Side Brake Caster

ART-NO.								Kg
20050EB1	50x23	63	18	67x48x2	54x24	6.2	27x2	40
20065EB1	64x27	84	22	95x70x2.5	76x44.5	9	35x2.5	50
20075EB1	75x30	98	22	105x80x2.5	83x60	11x8.5	42x2.5	60
20100EB1	100x32	126	31	128x105x3	102x78	13x10	51x2.5	80

20 Low profile caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, single ballrace swivel head

Wheel:

Materials: Plastic

Temperature range: -5℃~80℃



Double Ballrace Swivel Head is Available Use"N" before code no.

ART-NO.				Kg
20050PSW	50x23	6x25	——	70
20065PSW	63x22	10x32	——	75
20075PSW	74x31	10x39	——	80
20100PSW	100x32	11x47	——	100

Swivel Caster

ART-NO.								Kg
20050P	50x23	63	18	67x48x2	54x24	6.2	27x2	70
20065P	63x22	84	22	95x70x2.5	76x44.5	9	35x2.5	75
20075P	74x31	98	22	105x80x2.5	83x60	11x8.5	42x2.5	80
20100P	100x32	126	31	128x105x3	102x78	13x10	51x2.5	100

Fixed Caster

ART-NO.							Kg
20050PF	50x23	63	67x48	54x24	6.2	27x2	75
20065PF	63x22	84	112x57	89x27	8.5	35x2.5	80
20075PF	74x31	98	126x64	102x30	8.5	42x2.5	85
20100PF	100x32	126	155x73	127x44	10.5	51x3	100

Side Brake Caster

ART-NO.								Kg
20050PB1	50x23	63	18	67x48x2	54x24	6.2	27x2	70
20065PB1	63x22	84	22	95x70x2.5	76x44.5	9	35x2.5	75
20075PB1	74x31	98	22	105x80x2.5	83x60	11x8.5	42x2.5	80
20100PB1	100x32	126	31	128x105x3	102x78	13x10	51x2.5	100

20 Low profile caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, single ballrace swivel head

Wheel:

Materials: Nylon

Temperature range: -15℃~80℃



Double Ballrace Swivel Head is Available Use"N"before code no.

ART-NO.				Kg
20050NYSW	50x20	6x25	——	75
20065NYSW	63x22	10x32	——	80
20075NYSW	75x27	13x40	——	85
20100NYSW	100x32	15x48	——	100

Swivel Caster

ART-NO.								Kg
20050NY	50x20	63	18	67x48x2	54x24	6.2	27x2	75
20065NY	63x22	84	22	95x70x2.5	76x44.5	9	35x2.5	80
20075NY	75x27	98	22	105x80x2.5	83x60	11x8.5	42x2.5	85
20100NY	100x32	126	31	128x105x3	102x78	13x10	51x2.5	100

Fixed Caster

ART-NO.							Kg
20050NYF	50x20	63	67x48	54x24	6.2	27x2	75
20065NYF	63x22	84	112x57	89x27	8.5	35x2.5	80
20075NYF	75x27	98	126x64	102x30	8.5	42x2.5	85
20100NYF	100x32	126	155x73	127x44	10.5	51x3	100

Side Brake Caster

ART-NO.								Kg
20050NYB1	50x20	63	18	67x48x2	54x24	6.2	27x2	75
20065NYB1	63x22	84	22	95x70x2.5	76x44.5	9	35x2.5	80
20075NYB1	75x27	98	22	105x80x2.5	83x60	11x8.5	42x2.5	85
20100NYB1	100x32	126	31	128x105x3	102x78	13x10	51x2.5	100

20 Low profile caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, single ballrace swivel head

Wheel:

Materials: Cast iron



Double Ballrace Swivel Head is Available Use"N"before code no.

ART-NO.				Kg
20050CSW	50x22	6x25	——	80
20065CSW	65x26	8x31	——	85
20075CSW	75x32	10x40	——	90
20100CSW	100x33	10x48	——	100

Swivel Caster

ART-NO.								Kg
20050C	50x22	63	18	67x48x2	54x24	6.2	27x2	80
20065C	65x26	84	22	95x70x2.5	76x44.5	9	35x2.5	85
20075C	75x32	98	22	105x80x2.5	83x60	11x8.5	42x2.5	90
20100C	100x33	126	31	128x105x3	102x78	13x10	51x2.5	100

Fixed Caster

ART-NO.							Kg
20050CF	50x22	63	67x48	54x24	6.2	27x2	80
20065CF	65x26	84	112x57	89x27	8.5	35x2.5	85
20075CF	75x32	98	126x64	102x30	8.5	42x2.5	90
20100CF	100x33	126	155x73	127x44	10.5	51x3	100

Side Brake Caster

ART-NO.								Kg
20050CB1	50x22	63	18	67x48x2	54x24	6.2	27x2	80
20065CB1	65x26	84	22	95x70x2.5	76x44.5	9	35x2.5	85
20075CB1	75x32	98	22	105x80x2.5	83x60	11x8.5	42x2.5	90
20100CB1	100x33	126	31	128x105x3	102x78	13x10	51x2.5	100

TW Business machine twin wheel caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,
Dustproof seal

TWHRXXX

TWDHRXXX

TWTHRXXX

Hard rubber wheel
Hardness: 100 Shore A
Temperature range: - 5°C ~50°C

TWHR050	TWDHR050	TWTHR050	50x22	8x23.5	70	21	92x65	73x44	9.6x13	ø10.5	1/2"-13x1-1/2"	48x2.3	80

TWPPXXX

TWDPPXXX

TWTPPXXX

Plastic wheel
Temperature range: -5°C ~80°C

TWPP050	TWDPP050	TWTPP050	50x20	8x22.5	70	21	92x65	73x44	9.6x13	ø10.5	1/2"-13x1-1/2"	48x2.3	80

TWPUXXX

TWDPUXXX

TWTPUXXX

PU wheel
Hardness: 90±5 Shore A
Temperature range:- 5°C ~80°C

TWPU050	TWDPU050	TWTPU050	50x20	8x23.5	70	21	92x65	73x44	9.6x13	ø10.5	1/2"-13x1-1/2"	48x2.3	80

26 Medical caster

FLYWHEEL

Elegant Appearence for Hospitals, laboratories, display, shop fitting, furnitures.

- ★ **Chrome plated**
- ★ **Double ball race housing**
- ★ **65±5 Shore A High performance TPE wheel**
- ★ **Silence-Ball bearing wheel**
- ★ **Nylon dust proof seal**
- ★ **Zinc plate also available.**

Nylon Brake Pedal

ART-NO.								Kg
26C075TPE	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
26C100TPE	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	100
26C125TPE	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Fixed Caster

ART-NO.								Kg
26C075TPEF	75x32	104	95x67	73x45	11x8.5	41x2.5	70
26C100TPEF	100x32	132	95x67	73x45	11x8.5	41x2.5	100
26C125TPEF	125x32	158	95x67	73x45	11x8.5	41x2.5	150

Double Brake Caster,Nylon Pedal

ART-NO.								Kg
26C075TPEB	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
26C100TPEB	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	100
26C125TPEB	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Bolt Hole Swivel Caster

ART-NO.						
26C075TPED	75x32	101	71.5	41x2.5	12/12.7	70
26C100TPED	100x32	129	84	41x2.5	12/12.7	100
26C125TPED	125x32	155	96.5	41x2.5	12/12.7	150

Bolt Hole Side Brake Caster,Nylon Pedal

ART-NO.						
26C075TPEDB	75x32	101	71.5	41x2.5	12/12.7	70
26C100TPEDB	100x32	129	84	41x2.5	12/12.7	100
26C125TPEDB	125x32	155	96.5	41x2.5	12/12.7	150

Stem Swivel Caster

ART-NO.						
26C075TPES	75x32	101	71.5	41x2.5	28x40	70
26C100TPES	100x32	129	84	41x2.5	28x40	100
26C125TPES	125x32	155	96.5	41x2.5	28x40	150

Stem Double Brake Caster,Nylon Pedal

ART-NO.						
26C075TPESB	75x32	101	71.5	41x2.5	28x40	70
26C100TPESB	100x32	129	84	41x2.5	28x40	100
26C125TPESB	125x32	155	96.5	41x2.5	28x40	150

28 Institutional caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head
transparent dustproof seal

Wheel:
Materials: Polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision ball bearing
Temperature range: - 5 °C~80°C

Blue or Red color PU Available

ART-NO.				Kg
28075PUSW	75x32	8.2/10.2x40	6002	80
28100PUSW	100x32	8.2/10.2x40	6202	120
28125PUSW	125x32	8.2/10.2x40	6202	150

Swivel Caster

ART-NO.								Kg
28075PU	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PU	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PU	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Fixed Caster

ART-NO.							Kg
28075PUF	75x32	104	95x67	73x45	11x8.5	41x2.5	80
28100PUF	100x32	132	95x67	73x45	11x8.5	41x2.5	120
28125PUF	125x32	158	95x67	73x45	11x8.5	41x2.5	150

Side Brake Caster

ART-NO.								Kg
28075PUB1	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PUB1	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PUB1	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075PUB2	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PUB2	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PUB2	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075PUB3	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PUB3	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PUB3	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

28 Institutional caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
28075PUD	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PUD	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PUD	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Bolt Hole Side Brake Caster

ART-NO.								Kg
28075PUDB1	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PUDB1	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PUDB1	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075PUDB2	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PUDB2	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PUDB2	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Bolt Hole Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075PUDB3	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PUDB3	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PUDB3	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Other fittings

Hexagonal Subtense S=17mm



Swivel--- 28XXXPUT
Side brake--- 28XXXPUTB1
Brake, steel pedal--- 28XXXPUTB2
Brake, nylon pedal--- 28XXXPUTB3



Swivel--- 28XXXPUS
Side brake--- 28XXXPUSB1
Brake, steel pedal--- 28XXXPUSB2
Brake, nylon pedal--- 28XXXPUSB3



European type plate is available

Separated rigid
28XXXPUF2

28 Institutional caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head
transparent dustproof seal

Wheel:
Materials: Thermoplastic rubber
Hardness: 85±5 Shore A
Bearing type: Precision ball bearing
Temperature range: - 5°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

Wheel options:

28XXXTPE
65±5 Shore A High performance TPE wheel

ART-NO.				
28075TPRSW	75x32	8.2/10.2x40	6002	70
28100TPRSW	100x32	8.2/10.2x40	6202	100
28125TPRSW	125x32	8.2/10.2x40	6202	140

Swivel Caster

ART-NO.								
28075TPR	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
28100TPR	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	100
28125TPR	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	140

Fixed Caster

ART-NO.							
28075TPRF	75x32	104	95x67	73x45	11x8.5	41x2.5	70
28100TPRF	100x32	132	95x67	73x45	11x8.5	41x2.5	100
28125TPRF	125x32	158	95x67	73x45	11x8.5	41x2.5	140

Side Brake Caster

ART-NO.								
28075TPRB1	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
28100TPRB1	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	100
28125TPRB1	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	140

Double Brake Caster,Steel Pedal

ART-NO.								
28075TPRB2	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
28100TPRB2	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	100
28125TPRB2	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	140

Double Brake Caster,Nylon Pedal

ART-NO.								
28075TPRB3	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
28100TPRB3	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	100
28125TPRB3	125x32	155	96.5	95x67x3	73x45	11x8.5	41x2.5	140

28 Institutional caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								
28075TPRD	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	70
28100TPRD	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	100
28125TPRD	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	140

Bolt Hole Side Brake Caster

ART-NO.								
28075TPRDB1	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	70
28100TPRDB1	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	100
28125TPRDB1	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	140

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.								
28075TPRDB2	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	70
28100TPRDB2	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	100
28125TPRDB2	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	140

Bolt Hole Double Brake Caster,Nylon Pedal

ART-NO.								
28075TPRDB3	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	70
28100TPRDB3	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	100
28125TPRDB3	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	140

Other fittings

Hexagonal Subtense S=17mm



Swivel--- 28XXXTPRT
Side brake--- 28XXXTPRTB1
Brake, steel pedal--- 28XXXTPRTB2
Brake, nylon pedal--- 28XXXTPRTB3



Swivel--- 28XXXTPRS
Side brake--- 28XXXTPRSB1
Brake, steel pedal--- 28XXXTPRSB2
Brake, nylon pedal--- 28XXXTPRSB3



European type plate is available

Separated rigid
28XXXTPRF2

28 Institutional caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head
transparent dustproof seal

Wheel:
Materials: Plastic
Bearing type: Precision ball bearing
Temperature range: -5°C~80°C

ART-NO.				Kg
28075PPSW	75x32	8.2/10.2x40	6002	80
28100PPSW	100x32	8.2/10.2x40	6202	120
28125PPSW	125x32	8.2/10.2x40	6202	150

Swivel Caster

ART-NO.								Kg
28075PP	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PP	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PP	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Fixed Caster

ART-NO.							Kg
28075PPF	75x32	104	95x67	73x45	11x8.5	41x2.5	80
28100PPF	100x32	132	95x67	73x45	11x8.5	41x2.5	120
28125PPF	125x32	158	95x67	73x45	11x8.5	41x2.5	150

Side Brake Caster

ART-NO.								Kg
28075PPB1	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PPB1	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PPB1	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075PPB2	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PPB2	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PPB2	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075PPB3	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	80
28100PPB3	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	120
28125PPB3	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	150

28 Institutional caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
28075PPD	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PPD	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PPD	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Bolt Hole Side Brake Caster

ART-NO.								Kg
28075PPDB1	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PPDB1	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PPDB1	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075PPDB2	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PPDB2	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PPDB2	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Bolt Hole Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075PPDB3	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	80
28100PPDB3	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	120
28125PPDB3	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	150

Other fittings



Swivel--- 28XXXPPT
Side brake--- 28XXXPPTB1
Brake, steel pedal--- 28XXXPPTB2
Brake, nylon pedal--- 28XXXPPTB3

Hexagonal Subtense S=17mm



Swivel--- 28XXXPPS
Side brake--- 28XXXPPSB1
Brake, steel pedal--- 28XXXPPSB2
Brake, nylon pedal--- 28XXXPPSB3



European type plate is available

Separated rigid 28XXXPPF2

28 Institutional caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head
transparent dustproof seal

Wheel:
Materials: Elastic rubber
Hardness: 70±3 Shore A
Bearing type: Roller bearing
Temperature range: -5°C ~70°C
Good shock resistance and wear and tear

ART-NO.				Kg
28075BLSW	75x33	12x38		100
28100BLSW	100x33	12x38		120
28125BLSW	125x34	12x38		150

Swivel Caster

ART-NO.								Kg
28075BL	75x33	104	71.5	95x67x3	73x45	11x8.5	41x2.5	100
28100BL	100x33	132	84	95x67x3	73x45	11x8.5	41x2.5	130
28125BL	125x34	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

Fixed Caster

ART-NO.							Kg
28075BLF	75x33	104	95x67	73x45	11x8.5	41x2.5	100
28100BLF	100x33	132	95x67	73x45	11x8.5	41x2.5	130
28125BLF	125x34	158	95x67	73x45	11x8.5	41x2.5	180

Side Brake Caster

ART-NO.								Kg
28075BLB1	75x33	104	71.5	95x67x3	73x45	11x8.5	41x2.5	100
28100BLB1	100x33	132	84	95x67x3	73x45	11x8.5	41x2.5	130
28125BLB1	125x34	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075BLB2	75x33	104	71.5	95x67x3	73x45	11x8.5	41x2.5	100
28100BLB2	100x33	132	84	95x67x3	73x45	11x8.5	41x2.5	130
28125BLB2	125x34	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075BLB3	75x33	104	71.5	95x67x3	73x45	11x8.5	41x2.5	100
28100BLB3	100x33	132	84	95x67x3	73x45	11x8.5	41x2.5	130
28125BLB3	125x34	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

28 Institutional caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
28075BLD	75x33	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	100
28100BLD	100x33	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	130
28125BLD	125x34	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Bolt Hole Side Brake Caster

ART-NO.								Kg
28075BLDB1	75x33	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	100
28100BLDB1	100x33	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	130
28125BLDB1	125x34	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075BLDB2	75x33	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	100
28100BLDB2	100x33	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	130
28125BLDB2	125x34	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Bolt Hole Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075BLDB3	75x33	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	100
28100BLDB3	100x33	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	130
28125BLDB3	125x34	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Other fittings

Hexagonal Subtense S=17mm



Swivel--- 28XXXBLT
Side brake--- 28XXXBLTB1
Brake, steel pedal--- 28XXXBLTB2
Brake, nylon pedal--- 28XXXBLTB3



Swivel--- 28XXXBLS
Side brake--- 28XXXBLSB1
Brake, steel pedal--- 28XXXBLSB2
Brake, nylon pedal--- 28XXXBLSB3



European type plate is available

Separated rigid
28XXXBLF2

28 Institutional caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated, double ballrace swivel head transparent dustproof seal

Wheel:
Materials: Hard rubber
Hardness: 100 Shore A
Bearing type: Delrin bearing
Temperature range: -5℃~50 ℃

ART-NO.				Kg
28075HRSW	75x28	10x40		70
28100HRSW	100x32	10x40		80
28125HRSW	125x32	10x40		90

Swivel Caster

ART-NO.								Kg
28075HR	75x28	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
28100HR	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	80
28125HR	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	90

Fixed Caster

ART-NO.							Kg
28075HRF	75x28	104	95x67	73x45	11x8.5	41x2.5	70
28100HRF	100x32	132	95x67	73x45	11x8.5	41x2.5	80
28125HRF	125x32	158	95x67	73x45	11x8.5	41x2.5	90

Side Brake Caster

ART-NO.								Kg
28075HRB1	75x28	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
28100HRB1	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	80
28125HRB1	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	90

Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075HRB2	75x28	104	71.5	95x67x3	73x45	11x8.5	41x2.5	70
28100HRB2	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	80
28125HRB2	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	90

28 Institutional caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
28075HRD	75x28	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	70
28100HRD	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	80
28125HRD	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	90

Bolt Hole Side Brake Caster

ART-NO.								Kg
28075HRDB1	75x28	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	70
28100HRDB1	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	80
28125HRDB1	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	90

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075HRDB2	75x28	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	70
28100HRDB2	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	80
28125HRDB2	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	90

Other fittings

Hexagonal Subtense S=17mm



Swivel--- 28XXXHRT
Side brake--- 28XXXHRTB1
Brake, steel pedal--- 28XXXHRTB2



Swivel--- 28XXXHRS
Side brake--- 28XXXHRSB1
Brake, steel pedal--- 28XXXHRSB2



European type plate is available

Separated rigid
28XXXHRF2

65 American type institutional caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head
transparent dustproof seal

Wheel:
Materials: Polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision ball bearing
Temperature range: -5°C~80°C
Wheels of 28 series are suitable
for this range housings

ART-NO.				Kg
65075PUSW	75x32	8.2/10.2x40	6002	80
65100PUSW	100x32	8.2/10.2x40	6202	120
65125PUSW	125x32	8.2/10.2x40	6202	150

Swivel Caster

ART-NO.								Kg
65075PU	75x32	104	69. 5	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	80
65100PU	100x32	134	85	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	120
65125PU	125x32	158	98. 5	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	150

Fixed Caster

ART-NO.							Kg
65075PUF	75x32	104	93x61	72. 5x44. 5	12. 5x8. 5	41x2.5	80
65100PUF	100x32	134	93x61	72. 5x44. 5	12. 5x8. 5	41x2.5	120
65125PUF	125x32	158	93x61	72. 5x44. 5	12. 5x8. 5	41x2.5	150

Side Brake Caster

ART-NO.								Kg
65075PUB1	75x32	104	69. 5	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	80
65100PUB1	100x32	134	85	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	120
65125PUB1	125x32	158	98. 5	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	150

Stainless Steel Top Brake Caster, Nylon Pedal

ART-NO.								Kg
65075PUB2	75x32	104	69. 5	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	80
65100PUB2	100x32	134	85	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	120
65125PUB2	125x32	158	98. 5	93x61x3. 5	72. 5x44. 5	12. 5x8. 5	41x2.5	150

65 American type institutional caster

FLYWHEEL

Threaded Stem Swivel Caster

ART-NO.						Kg
65075PUT	75x32	104	69. 5	41x2.5	1/2″x1-1/2″	80
65100PUT	100x32	134	85	41x2.5	1/2″x1-1/2″	120
65125PUT	125x32	158	98. 5	41x2.5	1/2″x1-1/2″	150

Threaded Stem Side Brake Caster

ART-NO.						Kg
65075PUTB1	75x32	104	69. 5	41x2.5	1/2″x1-1/2″	80
65100PUTB1	100x32	134	85	41x2.5	1/2″x1-1/2″	120
65125PUTB1	125x32	158	98. 5	41x2.5	1/2″x1-1/2″	150

Threaded Stem Top Brake Caster, Nylon Pedal

ART-NO.						Kg
65075PUTB2	75x32	104	69. 5	41x2.5	1/2″x1-1/2″	80
65100PUTB2	100x32	134	85	41x2.5	1/2″x1-1/2″	120
65125PUTB2	125x32	158	98. 5	41x2.5	1/2″x1-1/2″	150

Wheel options:

Thermoplastic rubber
65xxxTPR

Plastic
65xxxPP

Hard rubber
65xxxHR

Poly urethane
65XXXPU

Stem fittings

Square solid stem

Octagonal stem

Grip ring stem

Solid stem

Other top plated size are availbale:



#3 Top plate

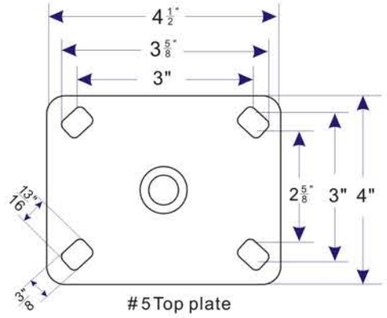

#5 Top plate

45 European standard industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated, double ballrace swivel head, dustproof seal

Wheel:
Materials: Steel core black rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5℃~50℃

Best design-adjustable brake

ART-NO.					Kg
45080SW	80x27	12x40	8x42		60
45100SW	100x30	12x40	8x42		80
45125SSW	125x38	12x40	10x42		100
45125MSW	125x38	15x50	10x52		100
45160SW	160x50	20x60	12x62		150
45200SW	200x50	20x60	12x62		210

Swivel Caster

ART-NO.								Kg
45080	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125S	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125M	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200	200x50	240	55	135x110x4	105x80	16x11	62x3	210

Fixed Caster

ART-NO.							Kg
45080F	80x27	108	105x88	80x60	14x9	42x2.5	60
45100F	100x30	128	105x88	80x60	14x9	42x2.5	80
45125SF	125x38	155	105x88	80x60	14x9	42x2.5	100
45125MF	125x38	156	135x113	105x80	16x11	52x2.5	100
45160F	160x50	195	135x114	105x80	16x11	62x3	150
45200F	200x50	240	135x114	105x80	16x11	62x3	210

Double Brake Caster

ART-NO.								Kg
45080B	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100B	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125SB	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125MB	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160B	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200B	200x50	240	55	135x110x4	105x80	16x11	62x3	210

45 European standard industrial caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.						Kg
45080D	80x27	106	37	12.5	42x2.5	60
45100D	100x30	126	37	12.5	42x2.5	80
45125SD	125x38	153	37	12.5	42x2.5	100
45125MD	125x38	153	42	12.5	52x2.5	100
45160D	160x50	191.5	55	16.5	62x3	150
45200D	200x50	236.5	55	16.5	62x3	210

Bolt Hole Double Brake Caster

ART-NO.						Kg
45080DB	80x27	106	37	12.5	42x2.5	60
45100DB	100x30	126	37	12.5	42x2.5	80
45125SDB	125x38	153	37	12.5	42x2.5	100
45125MDB	125x38	153	42	12.5	52x2.5	100
45160DB	160x50	191.5	55	16.5	62x3	150
45200DB	200x50	236.5	55	16.5	62x3	210

Threaded Stem Swivel Caster

ART-NO.						Kg
45080T	80x27	106	37	12x25	42x2.5	60
45100T	100x30	126	37	12x25	42x2.5	80
45125ST	125x38	153	37	12x25	42x2.5	100
45125MT	125x38	153	42	12x25	52x2.5	100
45160T	160x50	191.5	55	16x40	62x3	150
45200T	200x50	236.5	55	16x40	62x3	210

Threaded Stem Double Brake Caster

ART-NO.						Kg
45080TB	80x27	106	37	12x25	42x2.5	60
45100TB	100x30	126	37	12x25	42x2.5	80
45125STB	125x38	153	37	12x25	42x2.5	100
45125MTB	125x38	153	42	12x25	52x2.5	100
45160TB	160x50	191.5	55	16x40	62x3	150
45200TB	200x50	236.5	55	16x40	62x3	210

Threadguard is optional

45 European standard industrial caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, double ballrace swivel head, dustproof seal

Wheel:

Materials: Steel core gray rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5℃~50℃

Best design-adjustable brake

ART-NO.					Kg
45080GSW	80x27	12x40	8x42		60
45100GSW	100x30	12x40	8x42		80
45125SGSW	125x38	12x40	10x42		100
45125MGSW	125x38	15x50	10x52		100
45160GSW	160x50	20x60	12x62		150
45200GSW	200x50	20x60	12x62		210

Swivel Caster

ART-NO.								Kg
45080G	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100G	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125SG	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125MG	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160G	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200G	200x50	240	55	135x110x4	105x80	16x11	62x3	210

Fixed Caster

ART-NO.							Kg
45080GF	80x27	108	105x88	80x60	14x9	42x2.5	60
45100GF	100x30	128	105x88	80x60	14x9	42x2.5	80
45125SGF	125x38	155	105x88	80x60	14x9	42x2.5	100
45125MGF	125x38	156	135x113	105x80	16x11	52x2.5	100
45160GF	160x50	195	135x114	105x80	16x11	62x3	150
45200GF	200x50	240	135x114	105x80	16x11	62x3	210

Double Brake Caster

ART-NO.								Kg
45080GB	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100GB	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125SGB	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125MGB	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160GB	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200GB	200x50	240	55	135x110x4	105x80	16x11	62x3	210

45 European standard industrial caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.						Kg
45080GD	80x27	106	37	12.5	42x2.5	60
45100GD	100x30	126	37	12.5	42x2.5	80
45125SGD	125x38	153	37	12.5	42x2.5	100
45125MGD	125x38	153	42	12.5	52x2.5	100
45160GD	160x50	191.5	55	16.5	62x3	150
45200GD	200x50	236.5	55	16.5	62x3	210

Bolt Hole Double Brake Caster

ART-NO.						Kg
45080GDB	80x27	106	37	12.5	42x2.5	60
45100GDB	100x30	126	37	12.5	42x2.5	80
45125SGDB	125x38	153	37	12.5	42x2.5	100
45125MGDB	125x38	153	42	12.5	52x2.5	100
45160GDB	160x50	191.5	55	16.5	62x3	150
45200GDB	200x50	236.5	55	16.5	62x3	210

Threaded Stem Swivel Caster

ART-NO.						Kg
45080GT	80x27	106	37	12x25	42x2.5	60
45100GT	100x30	126	37	12x25	42x2.5	80
45125SGT	125x38	153	37	12x25	42x2.5	100
45125MGT	125x38	153	42	12x25	52x2.5	100
45160GT	160x50	191.5	55	16x40	62x3	150
45200GT	200x50	236.5	55	16x40	62x3	210

Threaded Stem Double Brake Caster

ART-NO.						Kg
45080GTB	80x27	106	37	12x25	42x2.5	60
45100GTB	100x30	126	37	12x25	42x2.5	80
45125SGTB	125x38	153	37	12x25	42x2.5	100
45125MGTB	125x38	153	42	12x25	52x2.5	100
45160GTB	160x50	191.5	55	16x40	62x3	150
45200GTB	200x50	236.5	55	16x40	62x3	210

Threadguard is optional

45 European standard industrial caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, double ballrace swivel head, dustproof seal

Wheel:

Materials: Plastic core black rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5°C~50°C

Best design-adjustable brake

ART-NO.					Kg
45080PHSW	80x27	12x41	8x42		60
45100PHSW	100x30	12x41	8x42		80
45125SPHSW	125x38	12x41	10x42		100
45125MPHSW	125x38	15x50	10x52		100
45160PHSW	160x50	20x60	12x62		150
45200PHSW	200x50	20x60	12x62		210

Swivel Caster

ART-NO.								Kg
45080PH	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100PH	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125SPH	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125MPH	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160PH	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200PH	200x50	240	55	135x110x4	105x80	16x11	62x3	210

Fixed Caster

ART-NO.							Kg
45080PHF	80x27	108	105x88	80x60	14x9	42x2.5	60
45100PHF	100x30	128	105x88	80x60	14x9	42x2.5	80
45125SPHF	125x38	155	105x88	80x60	14x9	42x2.5	100
45125MPHF	125x38	156	135x113	105x80	16x11	52x2.5	100
45160PHF	160x50	195	135x114	105x80	16x11	62x3	150
45200PHF	200x50	240	135x114	105x80	16x11	62x3	210

Double Brake Caster

ART-NO.								Kg
45080PHB	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100PHB	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125SPHB	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125MPHB	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160PHB	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200PHB	200x50	240	55	135x110x4	105x80	16x11	62x3	210

45 European standard industrial caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.						Kg
45080PHD	80x27	106	37	12.5	42x2.5	60
45100PHD	100x30	126	37	12.5	42x2.5	80
45125SPHD	125x38	153	37	12.5	42x2.5	100
45125MPHD	125x38	153	42	12.5	52x2.5	100
45160PHD	160x50	191.5	55	16.5	62x3	150
45200PHD	200x50	236.5	55	16.5	62x3	210

Bolt Hole Double Brake Caster

ART-NO.						Kg
45080PHDB	80x27	106	37	12.5	42x2.5	60
45100PHDB	100x30	126	37	12.5	42x2.5	80
45125SPHDB	125x38	153	37	12.5	42x2.5	100
45125MPHDB	125x38	153	42	12.5	52x2.5	100
45160PHDB	160x50	191.5	55	16.5	62x3	150
45200PHDB	200x50	236.5	55	16.5	62x3	210

Threaded Stem Swivel Caster

ART-NO.						Kg
45080PHT	80x27	106	37	12x25	42x2.5	60
45100PHT	100x30	126	37	12x25	42x2.5	80
45125SPHT	125x38	153	37	12x25	42x2.5	100
45125MPHT	125x38	153	42	12x25	52x2.5	100
45160PHT	160x50	191.5	55	16x40	62x3	150
45200PHT	200x50	236.5	55	16x40	62x3	210

Threaded Stem Double Brake Caster

ART-NO.						Kg
45080PHTB	80x27	106	37	12x25	42x2.5	60
45100PHTB	100x30	126	37	12x25	42x2.5	80
45125SPHTB	125x38	153	37	12x25	42x2.5	100
45125MPHTB	125x38	153	42	12x25	52x2.5	100
45160PHTB	160x50	191.5	55	16x40	62x3	150
45200PHTB	200x50	236.5	55	16x40	62x3	210

Threadguard is optional

45 European standard industrial caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, double ballrace swivel head, dustproof seal

Wheel:

Materials: Plastic core gray rubber
Hardness: 85±3 Shore A
Bearing type: Roller bearing
Temperature range: -5°C~50°C

Best design-adjustable brake

ART-NO.					Kg
45080PHGSW	80x27	12x41	8x42		60
45100PHGSW	100x30	12x41	8x42		80
45125SPHGSW	125x38	12x41	10x42		100
45125MPHGSW	125x38	15x50	10x52		100
45160PHGSW	160x50	20x60	12x62		150
45200PHGSW	200x50	20x60	12x62		210

Swivel Caster

ART-NO.								Kg
45080PHG	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100PHG	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125SPHG	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125MPHG	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160PHG	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200PHG	200x50	240	55	135x110x4	105x80	16x11	62x3	210

Fixed Caster

ART-NO.							Kg
45080PHGF	80x27	108	105x88	80x60	14x9	42x2.5	60
45100PHGF	100x30	128	105x88	80x60	14x9	42x2.5	80
45125SPHGF	125x38	155	105x88	80x60	14x9	42x2.5	100
45125MPHGF	125x38	156	135x113	105x80	16x11	52x2.5	100
45160PHGF	160x50	195	135x114	105x80	16x11	62x3	150
45200PHGF	200x50	240	135x114	105x80	16x11	62x3	210

Double Brake Caster

ART-NO.								Kg
45080PHGB	80x27	108	37	105x85x3	80x60	14x9	42x2.5	60
45100PHGB	100x30	128	37	105x85x3	80x60	14x9	42x2.5	80
45125SPHGB	125x38	155	37	105x85x3	80x60	14x9	42x2.5	100
45125MPHGB	125x38	156	42	135x110x3	105x80	16x11	52x2.5	100
45160PHGB	160x50	195	55	135x110x4	105x80	16x11	62x3	150
45200PHGB	200x50	240	55	135x110x4	105x80	16x11	62x3	210

45 European standard industrial caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.						Kg
45080PHGD	80x27	106	37	12.5	42x2.5	60
45100PHGD	100x30	126	37	12.5	42x2.5	80
45125SPHGD	125x38	153	37	12.5	42x2.5	100
45125MPHGD	125x38	153	42	12.5	52x2.5	100
45160PHGD	160x50	191.5	55	16.5	62x3	150
45200PHGD	200x50	236.5	55	16.5	62x3	210

Bolt Hole Double Brake Caster

ART-NO.						Kg
45080PHGDB	80x27	106	37	12.5	42x2.5	60
45100PHGDB	100x30	126	37	12.5	42x2.5	80
45125SPHGDB	125x38	153	37	12.5	42x2.5	100
45125MPHGDB	125x38	153	42	12.5	52x2.5	100
45160PHGDB	160x50	191.5	55	16.5	62x3	150
45200PHGDB	200x50	236.5	55	16.5	62x3	210

Threaded Stem Swivel Caster

ART-NO.						Kg
45080PHGT	80x27	106	37	12x25	42x2.5	60
45100PHGT	100x30	126	37	12x25	42x2.5	80
45125SPHGT	125x38	153	37	12x25	42x2.5	100
45125MPHGT	125x38	153	42	12x25	52x2.5	100
45160PHGT	160x50	191.5	55	16x40	62x3	150
45200PHGT	200x50	236.5	55	16x40	62x3	210

Threaded Stem Double Brake Caster

ART-NO.						Kg
45080PHGTB	80x27	106	37	12x25	42x2.5	60
45100PHGTB	100x30	126	37	12x25	42x2.5	80
45125SPHGTB	125x38	153	37	12x25	42x2.5	100
45125MPHGTB	125x38	153	42	12x25	52x2.5	100
45160PHGTB	160x50	191.5	55	16x40	62x3	150
45200PHGTB	200x50	236.5	55	16x40	62x3	210

Threadguard is optional

45 European standard industrial caster

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,
dustproof seal

Wheel:
Materials: Plastic
Bearing type: Roller bearing/
Precision double ball bearing/Plain bearing
Temperature range: -5°C~80°C

Best design-adjustable brake

ART-NO.							
ROLLER	BALL	PLAIN		ROLLER	BALL	PLAIN	
45080RPPSW	45080BPPSW	45080PPPSW	80x30	12x41	15x37	8x42	130
45100RPPSW	45100BPPSW	45100PPPSW	100x30	12x41	15x37	8x42	160
45125SRPPSW	45125SBPPSW	45125SPPPSW	125x30	12x41	15x37	10x42	200
45125MRPPSW	45125MBPPSW	45125MPPPSW	125x40	15x51	15x47	10x52	250
45160RPPSW	45160BPPSW	45160PPPSW	160x45	20x61	17x57	12x62	350
45200RPPSW	45200BPPSW	45200PPPSW	200x50	20x61	17x57	12x62	400

Swivel Caster

ART-NO.									
45080RPP	80x30	108	37	105x85x3	80x60	14x9	42x2.5		130
45100RPP	100x30	128	37	105x85x3	80x60	14x9	42x2.5		160
45125SRPP	125x30	155	37	105x85x3	80x60	14x9	42x2.5		200
45125MRPP	125x40	156	42	135x110x3	105x80	16x11	52x2.5		250
45160RPP	160x45	195	55	135x110x4	105x80	16x11	62x3		350
45200RPP	200x50	240	55	135x110x4	105x80	16x11	62x3		400

Fixed Caster

ART-NO.							
45080RPPF	80x30	108	105x88	80x60	14x9	42x2.5	130
45100RPPF	100x30	128	105x88	80x60	14x9	42x2.5	160
45125SRPPF	125x30	155	105x88	80x60	14x9	42x2.5	200
45125MRPPF	125x40	156	135x113	105x80	16x11	52x2.5	250
45160RPPF	160x45	195	135x114	105x80	16x11	62x3	350
45200RPPF	200x50	240	135x114	105x80	16x11	62x3	400

Double Brake Caster

ART-NO.									
45080RPPB	80x30	108	37	105x85x3	80x60	14x9	42x2.5		130
45100RPPB	100x30	128	37	105x85x3	80x60	14x9	42x2.5		160
45125SRPPB	125x30	155	37	105x85x3	80x60	14x9	42x2.5		200
45125MRPPB	125x40	156	42	135x110x3	105x80	16x11	52x2.5		250
45160RPPB	160x45	195	55	135x110x4	105x80	16x11	62x3		350
45200RPPB	200x50	240	55	135x110x4	105x80	16x11	62x3		400

45 European standard industrial caster

Bolt Hole Swivel Caster

ART-NO.							
45080RPPD	80x30	106	37	12.5	42x2.5		130
45100RPPD	100x30	126	37	12.5	42x2.5		160
45125SRPPD	125x30	153	37	12.5	42x2.5		200
45125MRPPD	125x40	153	42	12.5	52x2.5		250
45160RPPD	160x45	191.5	55	16.5	62x3		350
45200RPPD	200x50	236.5	55	16.5	62x3		400

Bolt Hole Double Brake Caster

ART-NO.							
45080RPPDB	80x30	106	37	12.5	42x2.5		130
45100RPPDB	100x30	126	37	12.5	42x2.5		160
45125SRPPDB	125x30	153	37	12.5	42x2.5		200
45125MRPPD	125x40	153	42	12.5	52x2.5		250
45160RPPDB	160x45	191.5	55	16.5	62x3		350
45200RPPDB	200x50	236.5	55	16.5	62x3		400

Threaded Stem Swivel Caster

ART-NO.							
45080RPPT	80x30	106	37	12x25	42x2.5		130
45100RPPT	100x30	126	37	12x25	42x2.5		160
45125SRPPT	125x30	153	37	12x25	42x2.5		200
45125MRPPT	125x40	153	42	12x25	52x2.5		250
45160RPPT	160x45	191.5	55	16x40	62x3		350
45200RPPT	200x50	236.5	55	16x40	62x3		400

Threaded Stem Double Brake Caster

ART-NO.							
45080RPPTB	80x30	106	37	12x25	42x2.5		130
45100RPPTB	100x30	126	37	12x25	42x2.5		160
45125SRPPTB	125x30	153	37	12x25	42x2.5		200
45125MRPPTB	125x40	153	42	12x25	52x2.5		250
45160RPPTB	160x45	191.5	55	16x40	62x3		350
45200RPPTB	200x50	236.5	55	16x40	62x3		400

Wheel options:

Precision double ball bearing wheel
Use"B" instead of "R"

Plain bearing wheel
Use"P" instead of "R"

Without threadguard Options

45 European standard industrial caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:

Materials: Nylon
Bearing type: Roller bearing/
Precision double ball bearing/Plain bearing
Temperature range: -15°C~80°C

Best design-adjustable brake

ART-NO.							
BALL	ROLLER	PLAIN		BALL	ROLLER	PLAIN	
45080BNYSW	45080RNYSW	45080PNYSW	80x30	15x37	12x41	8x42	200
45100BNYSW	45100RNYSW	45100PNYSW	100x30	15x37	12x41	8x42	250
45125SBNYSW	45125SRNYSW	45125SPNYSW	125x30	15x37	12x41	10x42	300
45125MBNYSW	45125MRNYSW	45125MPNYSW	125x40	15x47	15x51	10x52	350
45160BNYSW	45160RNYSW	45160PNYSW	160x45	17x57	20x61	12x62	500
45200BNYSW	45200RNYSW	45200PNYSW	200x50	17x57	20x61	12x62	600

Swivel Caster

ART-NO.								Ball Bearing	
45080BNY	80x30	108	37	105x85x3	80x60	14x9	42x2.5	6202x2	200
45100BNY	100x30	128	37	105x85x3	80x60	14x9	42x2.5	6202x2	250
45125SBNY	125x30	155	37	105x85x3	80x60	14x9	42x2.5	6202x2	300
45125MBNY	125x40	156	42	135x110x3	105x80	16x11	52x2.5	6202x2	350
45160BNY	160x45	195	55	135x110x4	105x80	16x11	62x3	6203x2	400
45200BNY	200x50	240	55	135x110x4	105x80	16x11	62x3	6203x2	400

Fixed Caster

ART-NO.							Ball Bearing	
45080BNYF	80x30	108	105x88	80x60	14x9	42x2.5	6202x2	200
45100BNYF	100x30	128	105x88	80x60	14x9	42x2.5	6202x2	250
45125SBNYF	125x30	155	105x88	80x60	14x9	42x2.5	6202x2	300
45125MBNYF	125x40	156	135x113	105x80	16x11	52x2.5	6202x2	350
45160BNYF	160x45	195	135x114	105x80	16x11	62x3	6203x2	400
45200BNYF	200x50	240	135x114	105x80	16x11	62x3	6203x2	400

Double Brake Caster

ART-NO.								Ball Bearing	
45080BNYB	80x30	108	37	105x85x3	80x60	14x9	42x2.5	6202x2	200
45100BNYB	100x30	128	37	105x85x3	80x60	14x9	42x2.5	6202x2	250
45125SBNYB	125x30	155	37	105x85x3	80x60	14x9	42x2.5	6202x2	300
45125MBNYB	125x40	156	42	135x110x3	105x80	16x11	52x2.5	6202x2	350
45160BNYB	160x45	195	55	135x110x4	105x80	16x11	62x3	6203x2	400
45200BNYB	200x50	240	55	135x110x4	105x80	16x11	62x3	6203x2	400

45 European standard industrial caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.						Ball Bearing	
45080BNYD	80x30	106	37	12.5	42x2.5	6202x2	200
45100BNYD	100x30	126	37	12.5	42x2.5	6202x2	250
45125SBNYD	125x30	153	37	12.5	42x2.5	6202x2	300
45125MBNYD	125x40	153	42	12.5	52x2.5	6202x2	350
45160BNYD	160x45	191.5	55	16.5	62x3	6203x2	400
45200BNYD	200x50	236.5	55	16.5	62x3	6203x2	400

Bolt Hole Double Brake Caster

ART-NO.						Ball Bearing	
45080BNYDB	80x30	106	37	12.5	42x2.5	6202x2	200
45100BNYDB	100x30	126	37	12.5	42x2.5	6202x2	250
45125SBNYDB	125x30	153	37	12.5	42x2.5	6202x2	300
45125MBNYDB	125x40	153	42	12.5	52x2.5	6202x2	350
45160BNYDB	160x45	191.5	55	16.5	62x3	6203x2	400
45200BNYDB	200x50	236.5	55	16.5	62x3	6203x2	400

Threaded Stem Swivel Caster

ART-NO.						Ball Bearing	
45080BNYT	80x30	106	37	12x25	42x2.5	6202x2	200
45100BNYT	100x30	126	37	12x25	42x2.5	6202x2	250
45125SBNYT	125x30	153	37	12x25	42x2.5	6202x2	300
45125MBNYT	125x40	153	42	12x25	52x2.5	6202x2	350
45160BNYT	160x45	191.5	55	16x40	62x3	6203x2	400
45200BNYT	200x50	236.5	55	16x40	62x3	6203x2	400

Threaded Stem Double Brake Caster

ART-NO.						Ball Bearing	
45080BNYTB	80x30	106	37	12x25	42x2.5	6202x2	200
45100BNYTB	100x30	126	37	12x25	42x2.5	6202x2	250
45125SBNYTB	125x30	153	37	12x25	42x2.5	6202x2	300
45125MBNYTB	125x40	153	42	12x25	52x2.5	6202x2	350
45160BNYTB	160x45	191.5	55	16x40	62x3	6203x2	400
45200BNYTB	200x50	236.5	55	16x40	62x3	6203x2	400

Wheel options:

Roller bearing wheel
Use"R" instead of "B"

Plain bearing wheel
Use"P" instead of "B"

Threadguard is optional

45 European standard industrial caster

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Polyurethane on nylon
Hardness: 90±5 Shore A
Bearing type: Roller bearing/
Precision double ball bearing/Plain bearing
Temperature range: -5℃~80℃

Best design-adjustable brake

ART-NO.							
BALL	ROLLER	PLAIN		BALL	ROLLER	PLAIN	
45080BPUNYSW	45080RPUNYSW	45080PPUNYSW	80x30	15x37	12x41	8x42	100
45100BPUNYSW	45100RPUNYSW	45100PPUNYSW	100x30	15x37	12x41	8x42	150
45125SBPUNYSW	45125SRPUNYSW	45125SPPUNYSW	125x30	15x37	12x41	10x42	170
45125MBPUNYSW	45125MRPUNYSW	45125MPPUNYSW	125x40	15x47	15x51	10x52	250
45160BPUNYSW	45160RPUNYSW	45160PPUNYSW	160x45	17x57	20x61	12x62	350
45200BPUNYSW	45200RPUNYSW	45200PPUNYSW	200x50	17x57	20x61	12x62	400

Swivel Caster

ART-NO.								Ball Bearing	
45080BPUNY	80x30	108	37	105x85x3	80x60	14x9	42x2.5	6202x2	100
45100BPUNY	100x30	128	37	105x85x3	80x60	14x9	42x2.5	6202x2	150
45125SBPUNY	125x30	155	37	105x85x3	80x60	14x9	42x2.5	6202x2	170
45125MBPUNY	125x40	156	42	135x110x3	105x80	16x11	52x2.5	6202x2	250
45160BPUNY	160x45	195	55	135x110x4	105x80	16x11	62x3	6203x2	350
45200BPUNY	200x50	240	55	135x110x4	105x80	16x11	62x3	6203x2	400

Fixed Caster

ART-NO.							
45080BPUNYF	80x30	108	105x88	80x60	14x9	42x2.5	6202x2	100
45100BPUNYF	100x30	128	105x88	80x60	14x9	42x2.5	6202x2	150
45125SBPUNYF	125x30	155	105x88	80x60	14x9	42x2.5	6202x2	170
45125MBPUNYF	125x40	156	135x113	105x80	16x11	52x2.5	6202x2	250
45160BPUNYF	160x45	195	135x114	105x80	16x11	62x3	6203x2	350
45200BPUNYF	200x50	240	135x114	105x80	16x11	62x3	6203x2	400

Double Brake Caster

ART-NO.								Ball Bearing	
45080BPUNYB	80x30	108	37	105x85x3	80x60	14x9	42x2.5	6202x2	100
45100BPUNYB	100x30	128	37	105x85x3	80x60	14x9	42x2.5	6202x2	150
45125SBPUNYB	125x30	155	37	105x85x3	80x60	14x9	42x2.5	6202x2	170
45125MBPUNYB	125x40	156	42	135x110x3	105x80	16x11	52x2.5	6202x2	250
45160BPUNYB	160x45	195	55	135x110x4	105x80	16x11	62x3	6203x2	350
45200BPUNYB	200x50	240	55	135x110x4	105x80	16x11	62x3	6203x2	400

45 European standard industrial caster

Bolt hole swivel caster

ART-NO.						Ball Bearing	
45080BPUNYD	80x30	106	37	12.5	42x2.5	6202x2	100
45100BPUNYD	100x30	126	37	12.5	42x2.5	6202x2	150
45125SBPUNYD	125x30	153	37	12.5	42x2.5	6202x2	170
45125MBPUNYD	125x40	153	42	12.5	52x2.5	6202x2	250
45160BPUNYD	160x45	191.5	55	16.5	62x3	6203x2	350
45200BPUNYD	200x50	236.5	55	16.5	62x3	6203x2	400

Bolt Hole Double Brake Caster

ART-NO.						Ball Bearing	
45080BPUNYDB	80x30	106	37	12.5	42x2.5	6202x2	100
45100BPUNYDB	100x30	126	37	12.5	42x2.5	6202x2	150
45125SBPUNYDB	125x30	153	37	12.5	42x2.5	6202x2	170
45125MBPUNYDB	125x40	153	42	12.5	52x2.5	6202x2	250
45160BPUNYDB	160x45	191.5	55	16.5	62x3	6203x2	350
45200BPUNYDB	200x50	236.5	55	16.5	62x3	6203x2	400

Threaded stem swivel caster

ART-NO.						Ball Bearing	
45080BPUNYT	80x30	106	37	12x25	42x2.5	6202x2	100
45100BPUNYT	100x30	126	37	12x25	42x2.5	6202x2	150
45125SBPUNYT	125x30	153	37	12x25	42x2.5	6202x2	170
45125MBPUNYT	125x40	153	42	12x25	52x2.5	6202x2	250
45160BPUNYT	160x45	191.5	55	16x40	62x3	6203x2	350
45200BPUNYT	200x50	236.5	55	16x40	62x3	6203x2	400

Threaded Stem Double Brake Caster

ART-NO.						Ball Bearing	
45080BPUNYTB	80x30	106	37	12x25	42x2.5	6202x2	100
45100BPUNYTB	100x30	126	37	12x25	42x2.5	6202x2	150
45125SBPUNYTB	125x30	153	37	12x25	42x2.5	6202x2	170
45125MBPUNYTB	125x40	153	42	12x25	52x2.5	6202x2	250
45160BPUNYTB	160x45	191.5	55	16x40	62x3	6203x2	350
45200BPUNYTB	200x50	236.5	55	16x40	62x3	6203x2	400

Wheel options:

Roller bearing wheel
Use"R" instead of "B"

Plain bearing wheel
Use"P" instead of "B"

45 European standard industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated, double ballrace swivel head, dustproof seal

Wheel:
Materials: Elastic rubber
Hardness: 70±3 Shore A
Bearing type: Roller bearing/ Precision double ball bearing
Temperature range: -5°C~70°C
Nonmarking,durable,good shock resistance,floor protection

Best design-adjustable brake

ART-NO.							Kg
ROLLER	BALL	ROLLER	BALL	ROLLER	BALL		
45080RBLSW		80x35		12x40			120
45100RBLSW	45100BBLSW	100x36	100x36	12x40	8x40	6201x2	160
45125SRBLSW	45125BBLSW	125x36	125x36	12x40	10x40	6201x2	200
45125MRBLSW	45125MBBLSW	125x36	125x36	12x50	10x50	6201x2	200
45125LRBLSW	45125LBBLSW	125x50	125x50	20x60	12x60	6204x2	250
45150RBLSW	45150BBLSW	150x48	150x50	20x60	12x60	6204x2	300
45160RBLSW	45160BBLSW	160x48	160x50	20x60	12x60	6204x2	350
45200RBLSW	45200BBLSW	200x48	200x50	20x60	12x60	6204x2	400

Swivel Caster

ART-NO.									Kg
45080RBL	80x35	108	37	105x85x3	80x60	14x9	42x2.5		120
45100RBL	100x36	128	37	105x85x3	80x60	14x9	42x2.5		160
45125SRBL	125x36	155	37	105x85x3	80x60	14x9	42x2.5		200
45125MRBL	125x36	156	42	135x110x3	105x80	16x11	52x2.5		200
45125LRBL	125x50	162	55	135x110x3	105x80	16x11	52x2.5		250
45150RBL	150x48	190	55	135x110x4	105x80	16x11	62x3		300
45160RBL	160x48	195	55	135x110x4	105x80	16x11	62x3		350
45200RBL	200x48	240	55	135x110x4	105x80	16x11	62x3		400

Fixed Caster

ART-NO.								Kg
45080RBLF	80x35	108	105x88	80x60	14x9	42x2.5		120
45100RBLF	100x36	128	105x88	80x60	14x9	42x2.5		160
45125SRBLF	125x36	155	105x88	80x60	14x9	42x2.5		200
45125MRBLF	125x36	156	135x113	105x80	16x11	52x2.5		200
45125LRBLF	125x50	162	135x113	105x80	16x11	52x2.5		250
45150RBLF	150x48	190	135x114	105x80	16x11	62x3		300
45160RBLF	160x48	195	135x114	105x80	16x11	62x3		350
45200RBLF	200x48	240	135x114	105x80	16x11	62x3		400

Double Brake Caster

ART-NO.									Kg
45080RBLB	80x35	108	37	105x85x3	80x60	14x9	42x2.5		120
45100RBLB	100x36	128	37	105x85x3	80x60	14x9	42x2.5		160
45125SRBLB	125x36	155	37	105x85x3	80x60	14x9	42x2.5		200
45125MRBLB	125x36	156	42	135x110x3	105x80	16x11	52x2.5		200
45125LRBLB	125x50	162	55	135x110x3	105x80	16x11	52x2.5		250
45150RBLB	150x48	190	55	135x110x4	105x80	16x11	62x3		300
45160RBLB	160x48	195	55	135x110x4	105x80	16x11	62x3		350
45200RBLB	200x48	240	55	135x110x4	105x80	16x11	62x3		400

45 European standard industrial caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.							Kg
45080RBLD	80x35	106	37	12.5	42x2.5		120
45100RBLD	100x36	126	37	12.5	42x2.5		160
45125SRBLD	125x36	153	37	12.5	42x2.5		200
45125MRBLD	125x36	153	42	12.5	52x2.5		200
45125LRBLD	125x50	158.5	55	12.5	52x2.5		250
45150RBLD	150x48	186.5	55	16.5	62x3		300
45160RBLD	160x48	191.5	55	16.5	62x3		350
45200RBLD	200x48	236.5	55	16.5	62x3		400

Bolt Hole Double Brake Caster

ART-NO.							Kg
45080RBLDB	80x35	106	37	12.5	42x2.5		120
45100RBLDB	100x36	126	37	12.5	42x2.5		160
45125SRBLDB	125x36	153	37	12.5	42x2.5		200
45125MRBLDB	125x36	153	42	12.5	52x2.5		200
45125LRBLDB	125x50	158.5	55	12.5	52x2.5		250
45150RBLDB	150x48	186.5	55	16.5	62x3		300
45160RBLDB	160x48	191.5	55	16.5	62x3		350
45200RBLDB	200x48	236.5	55	16.5	62x3		400

Threaded Stem Swivel Caster

ART-NO.							Kg
45080RBLT	80x35	106	37	12x25	42x2.5		120
45100RBLT	100x36	126	37	12x25	42x2.5		160
45125SRBLT	125x36	153	37	12x25	42x2.5		200
45125MRBLT	125x36	153	42	12x25	52x2.5		200
45125LRBLT	125x50	158.5	55	12x25	52x2.5		250
45150RBLT	150x48	186.5	55	16x40	62x3		300
45160RBLT	160x48	191.5	55	16x40	62x3		350
45200RBLT	200x48	236.5	55	16x40	62x3		400

Threaded Stem Double Brake Caster

ART-NO.							Kg
45080RBLTB	80x35	106	37	12x25	42x2.5		120
45100RBLTB	100x36	126	37	12x25	42x2.5		160
45125SRBLTB	125x36	153	37	12x25	42x2.5		200
45125MRBLTB	125x36	153	42	12x25	52x2.5		200
45125LRBLTB	125x50	158.5	55	12x25	52x2.5		250
45150RBLTB	150x48	186.5	55	16x40	62x3		300
45160RBLTB	160x48	191.5	55	16x40	62x3		350
45200RBLTB	200x48	236.5	55	16x40	62x3		400

Wheel options:

Ball bearing wheel
Use"B"instead of"R"

45XXXPU
75mm,100mm,125mm

45XXXTPR
75mm,100mm,125mm

45XXXPP
75mm,100mm,125mm

45 European standard industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Sandwich
Hardness: 92±3 Shore A
Bearing type: Roller bearing
Temperature range: -5℃~80℃
Acid,alkai resistance,good shock absorbent,durable

Best design-adjustable brake

Swivel Caster

ART-NO.									Kg
45100RSA	100x36	8x42	128	37	105x85x3	80x60	14x9	42x2.5	150
43125RSA	125x36	10x48	159	40	116x90x3	80x60	14x9	50x3	200

Fixed Caster

ART-NO.								Kg
45100RSAF	100x36	8x42	128	105x85	80x60	14x9	42x2.5	150
43125RSAF	125x36	10x48	159	116x90	80x60	14x9	50x3	200

Double Brake Caster

ART-NO.									Kg
45100RSAB	100x36	8x42	128	37	105x85x3	80x60	14x9	42x2.5	150
43125RSAB	125x36	10x48	159	40	116x90x3	80x60	14x9	50x3	200

Bolt Hole Swivel Caster

ART-NO.							
45100RSAD	100x36	8x42	126	37	12.5	42x2.5	150
43125RSAD	125x36	10x48	154	40	12.5	50x3	200

Bolt Hole Double Brake Caster

ART-NO.							
45100RSADB	100x36	8x42	126	37	12.5	42x2.5	150
43125RSADB	125x36	10x48	154	40	12.5	50x3	200

Threaded Stem Swivel Caster

ART-NO.							
45100RSAT	100x36	8x42	126	37	12x25	42x2.5	150
43125RSAT	125x36	10x48	154	40	12x25	50x3	200

Threaded Stem Double Brake Caster

ART-NO.							
45100RSATB	100x36	8x42	126	37	12x25	42x2.5	150
43125RSATB	125x36	10x48	154	40	12x25	50x3	200

45 European standard industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20°C~80°C

Best design-adjustable brake

ART-NO.					Kg
4507532BCPUSW	75x32	10x35	8x42	6200x2	150
4510032BCPUSW	100x32	15x32	8x42	6202x2	200
4510038BCPUSW	100x38	15x38	8x42	6002x2	350
4512538BCPUSW	125x38	15x38	10x42	6002x2	400
4512550BCPUSW	125x50	17x56	12x62	6003x2	600
4515050BCPUSW	150x50	17x56	12x62	6003x2	700
4520050BCPUSW	200x50	20x56	12x62	6204x2	900

Swivel Caster

ART-NO.									Kg
4507532BCPU	75x32	108	37	105x85x3	80x60	14x9	42x2.5	6200x2	150
4510032BCPU	100x32	128	37	105x85x3	80x60	14x9	42x2.5	6202x2	200
4510038BCPU	100x38	128	37	105x85x3	80x60	14x9	42x2.5	6203x2	250
4512538SBCPU	125x38	155	37	105x85x3	80x60	14x9	42x2.5	6203x2	300
4512550LBCPU	125x50	156	55	135x110x4	105x80	16x11	62x3	6003x2	350
4515050BCPU	150x50	190	55	135x110x4	105x80	16x11	62x3	6003x2	400
4520050BCPU	200x50	240	55	135x110x4	105x80	16x11	62x3	6204x2	450

Fixed Caster

ART-NO.								Kg
4507532BCPUF	75x32	108	105x88	80x60	14x9	42x2.5	6200x2	150
4510032BCPUF	100x32	128	105x88	80x60	14x9	42x2.5	6202x2	200
4510038BCPUF	100x38	128	105x88	80x60	14x9	42x2.5	6203x2	250
4512538SBCPUF	125x38	155	105x88	80x60	14x9	42x2.5	6203x2	300
4512550LBCPUF	125x50	156	135x114	105x80	16x11	62x3	6003x2	350
4515050BCPUF	150x50	190	135x114	105x80	16x11	62x3	6003x2	400
4520050BCPUF	200x50	240	135x114	105x80	16x11	62x3	6204x2	450

Double Brake Caster

ART-NO.									Kg
4507532BCPUB	75x32	108	37	105x85x3	80x60	14x9	42x2.5	6200x2	150
4510032BCPUB	100x32	128	37	105x85x3	80x60	14x9	42x2.5	6202x2	200
4510038BCPUB	100x38	128	37	105x85x3	80x60	14x9	42x2.5	6203x2	250
4512538SBCPUB	125x38	155	37	105x85x3	80x60	14x9	42x2.5	6203x2	300
4512550LBCPUB	125x50	156	55	135x110x4	105x80	16x11	62x3	6003x2	350
4515050BCPUB	150x50	190	55	135x110x4	105x80	16x11	62x3	6003x2	400
4520050BCPUB	200x50	240	55	135x110x4	105x80	16x11	62x3	6204x2	450

45 European standard industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,
dustproof seal

Wheel:
Materials: Steel core polyurethane
Hardness: 90±5 Shore A
Bearing type: Steel roller bearing
Temperature range: -20°C~80°C

Best design-adjustable brake

ART-NO.					Kg
4507532RCPUSW	75x32	12x35	8x42		100
4510038RCPUSW	100x38	12x38	8x42		150
4512538RCPUSW	125x38	12x38	10x42		200
4512550RCPUSW	125x50	20x56	12x62		250
4515050RCPUSW	150x50	20x56	12x62		300
4520050RCPUSW	200x50	20x56	12x62		350

Swivel Caster

ART-NO.									Kg
4507532RCPU	75x32	108	37	105x85x3	80x60	14x9	42x2.5		100
4510038RCPU	100x38	128	37	105x85x3	80x60	14x9	42x2.5		150
4512538SRCPU	125x38	155	37	105x85x3	80x60	14x9	42x2.5		200
4512550LRCPU	125x50	156	55	135x110x4	105x80	16x11	62x3		250
4515050RCPU	150x50	190	55	135x110x4	105x80	16x11	62x3		300
4520050RCPU	200x50	240	55	135x110x4	105x80	16x11	62x3		350

Fixed Caster

ART-NO.								Kg
4507532RCPUF	75x32	108	105x88	80x60	14x9	42x2.5		100
4510038RCPUF	100x38	128	105x88	80x60	14x9	42x2.5		150
4512538SRCPUF	125x38	155	105x88	80x60	14x9	42x2.5		200
4512550LRCPUF	125x50	156	135x114	105x80	16x11	62x3		250
4515050RCPUF	150x50	190	135x114	105x80	16x11	62x3		300
4520050RCPUF	200x50	240	135x114	105x80	16x11	62x3		350

Double Brake Caster

ART-NO.									Kg
4507532RCPUB	75x32	108	37	105x85x3	80x60	14x9	42x2.5		100
4510038RCPUB	100x38	128	37	105x85x3	80x60	14x9	42x2.5		150
4512538SRCPUB	125x38	155	37	105x85x3	80x60	14x9	42x2.5		200
4512550LRCPUB	125x50	156	55	135x110x4	105x80	16x11	62x3		250
4515050RCPUB	150x50	190	55	135x110x4	105x80	16x11	62x3		300
4520050RCPUB	200x50	240	55	135x110x4	105x80	16x11	62x3		350

45 European standard industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head,dustproof seal

Wheel:
Materials: Thermoplastic rubber
Hardness: 85±5 Shore A
Bearing type: Steel roller bearing
Temperature range: -5°C~80°C
Nonmarking,durable,good shock absorbent

Best design-adjustable brake

ART-NO.				Kg
45125LRTPRSW	125x50	13x62		150
45150RTPRSW	150x50	13x62		200
45200RTPRSW	200x50	13x62		240

Swivel Caster

ART-NO.								Kg
45125LRTPR	125x50	156	55	135x110x4	105x80	16x11	62x3	150
45150RTPR	150x50	195	55	135x110x4	105x80	16x11	62x3	200
45200RTPR	200x50	240	55	135x110x4	105x80	16x11	62x3	240

Fixed Caster

ART-NO.							Kg
45125LRTPRF	125x50	156	135x114	105x80	16x11	62x3	150
45150RTPRF	150x50	195	135x114	105x80	16x11	62x3	200
45200RTPRF	200x50	240	135x114	105x80	16x11	62x3	240

Double Brake Caster

ART-NO.								Kg
45125LRTPRB	125x50	156	55	135x110x4	105x80	16x11	62x3	150
45150RTPRB	150x50	195	55	135x110x4	105x80	16x11	62x3	200
45200RTPRB	200x50	240	55	135x110x4	105x80	16x11	62x3	240

Wheel options:

Roller bearing
Plastic Core PU wheel
45xxxRPUPP

Ball bearing
Aluminium Core PU wheel
45xxxBAPU

Ball bearing
Aluminium Core Elastic Rubber wheel
45xxxBABL

47 European type medium duty caster

FLYWHEEL

Housing:

Made of pressed steel,zinc plated, double ballrace swivel head, dustproof seal

Swivel Housing With Bolt Hole Fitting

ART-NO.								Kg
47100SH	100	132	42.5	100x86x4.5	80x60	11x9	46x3.5	400
47125SH	125	158	42.5	100x86x4.5	80x60	11x9	46x3.5	400

Fixed Housing

ART-NO.							Kg
47100FH	100	132	100x86x3.5	80x60	11x9	46x3.5	400
47125FH	125	158	100x86x3.5	80x60	11x9	46x3.5	400

Double Brake Housing With Bolt Hole Fitting, Nylon Pedal

ART-NO.								Kg
47100BH	100	132	42.5	100x86x4.5	80x60	11x9	46x3.5	400
47125BH	125	158	42.5	100x86x4.5	80x60	11x9	46x3.5	400

Bolt Hole Swivel Housing

ART-NO.						Kg
47100DSH	100	130	42.5	13	46x3.5	400
47125DSH	125	156	42.5	13	46x3.5	400

Bolt Hole Double Brake Housing

ART-NO.						Kg
47100DBH	100	130	42.5	13	46x3.5	400
47125DBH	125	156	42.5	13	46x3.5	400

Wheel:

Materials: Elastic rubber
Bearing type: Roller bearing

Hardness: 70±3 Shore A
Temperature range: -5°C~70°C

Nonmarking,durable,good shock resistance,floor protection

Swivel Caster

ART-NO.										Kg
47100BBL	100x36	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6002x2	180
47125BBL	125x36	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6002x2	200

Fixed Caster

ART-NO.									Kg
47100BBLF	100x36	10x46	132	100x86x3.5	80x60	11x9	46x3.5	6002x2	180
47125BBLF	125x36	10x46	158	100x86x3.5	80x60	11x9	46x3.5	6002x2	200

Double Brake Caster , Nylon Brake Pedal

ART-NO.										Kg
47100BBLB	100x36	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6002x2	180
47125BBLB	125x36	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6002x2	200

47 European type medium duty caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
47100BBLD	100x36	10x46	130	42.5	13	46x3.5	6002x2	180
47125BBLD	125x36	10x46	156	42.5	13	46x3.5	6002x2	200

Bolt Hole Double Brake Caster

ART-NO.								Kg
47100BBLDB	100x36	10x46	130	42.5	13	46x3.5	6002x2	180
47125BBLDB	125x36	10x46	156	42.5	13	46x3.5	6002x2	200

Wheel:

Materials: Polyurethane on nylon
Bearing type: Precision ball bearing

Hardness: 90±5 Shore A
Temperature range: -5℃~80℃

Swivel Caster

ART-NO.										Kg
47100BPUNY	100x30	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	150
47125BPUNY	125x30	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	170

Fixed Caster

ART-NO.										Kg
47100BPUNYF	100x30	10x46	132	100x86x3.5	80x60	11x9	46x3.5	6202x2	150
47125BPUNYF	125x30	10x46	158	100x86x3.5	80x60	11x9	46x3.5	6202x2	170

Double Brake Caster , Nylon Brake Pedal

ART-NO.										Kg
47100BPUNYB	100x30	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	150
47125BPUNYB	125x30	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	170

Bolt Hole Swivel Caster

ART-NO.								Kg
47100BPUNYD	100x30	10x46	130	42.5	13	46x3.5	6202x2	150
47125BPUNYD	125x30	10x46	156	42.5	13	46x3.5	6202x2	170

Bolt Hole Double Brake Caster

ART-NO.								Kg
47100BPUNYDB	100x30	10x46	130	42.5	13	46x3.5	6202x2	150
47125BPUNYDB	125x30	10x46	156	42.5	13	46x3.5	6202x2	170

47 European type medium duty caster

FLYWHEEL

Wheel:
Materials: Nylon Temperature range: -15℃~80℃ Bearing type: Precision ball bearing

Swivel Caster

ART-NO.										Kg
47100BNY	100x30	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	250
47125BNY	125x30	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	350

Fixed Caster

ART-NO.									Kg
47100BNYF	100x30	10x46	132	100x86x3.5	80x60	11x9	46x3.5	6202x2	250
47125BNYF	125x30	10x46	158	100x86x3.5	80x60	11x9	46x3.5	6202x2	350

Double Brake Caster , Nylon Brake Pedal

ART-NO.										Kg
47100BNYB	100x30	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	250
47125BNYB	125x30	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6202x2	350

Bolt Hole Swivel Caster

ART-NO.								Kg
47100BNYD	100x30	10x46	130	42.5	13	46x3.5	6202x2	250
47125BNYD	125x30	10x46	156	42.5	13	46x3.5	6202x2	350

Bolt Hole Double Brake Caster

ART-NO.								Kg
47100BNYDB	100x30	10x46	130	42.5	13	46x3.5	6202x2	250
47125BNYDB	125x30	10x46	156	42.5	13	46x3.5	6202x2	350

Wheel:
Materials: Sandwich Hardness: 92±3 Shore A Temperature range: -5℃~80℃ Bearing type: Precision ball bearing Acid,alkai resistance,good shock

Swivel Caster

ART-NO.										Kg
47100BSA	100x36	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6202	150
47125BSA	125x36	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6202	200

Fixed Caster

ART-NO.									Kg
47100BSAF	100x36	10x46	132	100x86x3.5	80x60	11x9	46x3.5	6202	150
47125BSAF	125x36	10x46	158	100x86x3.5	80x60	11x9	46x3.5	6202	200

Double Brake Caster , Nylon Brake Pedal

ART-NO.										Kg
47100BSAB	100x36	10x46	132	42.5	100x86x4.5	80x60	11x9	46x3.5	6202	150
47125BSAB	125x36	10x46	158	42.5	100x86x4.5	80x60	11x9	46x3.5	6202	200

47 European type medium duty caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
47100BSAD	100x36	10x46	130	42.5	13	46x3.5	6202	150
47125BSAD	125x36	10x46	156	42.5	13	46x3.5	6202	200

Bolt Hole Double Brake Caster

ART-NO.								Kg
47100BSADB	100x36	10x46	130	42.5	13	46x3.5	6202x1	150
47125BSADB	125x36	10x46	156	42.5	13	46x3.5	6202x1	200

48 European type industrial caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head, dustproof seal

Wheel:
Materials: Steel core black rubber Hardness: 85±3 Shore A
Bearing type: Roller bearing Temperature range: -5℃~50℃

ART-NO.				Kg
48080SW	80x24	12x40	8x42	60
48100SW	100x27	12x40	8x42	80
48125SW	125x36	12x45	8x46	100
48160SW	160x38	20x59	12x62	150
48200SW	200x48	20x59	12x62	210

Swivel Caster

ART-NO.								Kg
48080	80x24	108	36	104x80x2.5	80x60	14x9	42x2.5	60
48100	100x27	128	36	104x80x2.5	80x60	14x9	42x2.5	80
48125	125x36	155	36	104x80x2.5	80x60	14x9	46x2.5	100
48160	160x38	195	56	140x110x3	105x80	18x11	62x3	150
48200	200x48	240	56	140x110x3	105x80	18x11	62x3	210

Fixed Caster

ART-NO.							Kg
48080F	80x24	108	104x80	80x60	14x9	42x2.5	60
48100F	100x27	128	104x80	80x60	14x9	42x2.5	80
48125F	125x36	155	104x80	80x60	14x9	46x2.5	100
48160F	160x38	195	140x110	105x80	18x11	62x3	150
48200F	200x48	240	140x110	105x80	18x11	62x3	210

Double Brake Caster

ART-NO.								Kg
48080B	80x24	108	36	104x80x2.5	80x60	14x9	42x2.5	60
48100B	100x27	128	36	104x80x2.5	80x60	14x9	42x2.5	80
48125B	125x36	155	36	104x80x2.5	80x60	14x9	46x2.5	100
48160B	160x38	195	56	140x110x3	105x80	18x11	62x3	150
48200B	200x48	240	56	140x110x3	105x80	18x11	62x3	210

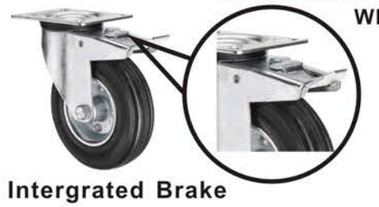

Intergrated Brake

Wheel options:

48XXXPP

48XXXNY

48XXXBL

48XXXG

50 European type medium duty caster

FLYWHEEL

Housing:
Made of pressed steel,zinc plated,
double ballrace swivel head
Heat treated ballraces and
hardened steel balls
transparent dustproof seal

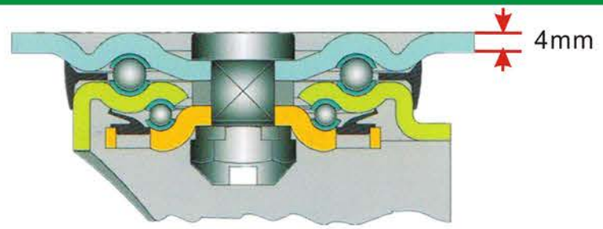

Adjustable brake

Swivel Housing

ART-NO.								Kg
50080SH	80	120	42	105x85x4	80x60	16x9	49x3. 5	500
50100SH	100	138	42	105x85x4	80x60	16x9	49x3. 5	500
50125SH	125	163	42	105x85x4	80x60	16x9	49x3. 5	500
50150SH	150	190	42	105x85x4	80x60	16x9	49x3. 5	500

Fixed Housing

ART-NO.								Kg
50080FH	80	120	105x92x3. 5	80x60	16x9	49x3. 5	500
50100FH	100	138	105x92x3. 5	80x60	16x9	49x3. 5	500
50125FH	125	163	105x92x3. 5	80x60	16x9	49x3. 5	500
50150FH	150	190	105x92x3. 5	80x60	16x9	49x3. 5	500

Double Brake Housing, Steel Pedal

ART-NO.								Kg
50080BH	80	120	42	105x85x4	80x60	16x9	49x3. 5	500
50100BH	100	138	42	105x85x4	80x60	16x9	49x3. 5	500
50125BH	125	163	42	105x85x4	80x60	16x9	49x3. 5	500
50150BH	150	190	42	105x85x4	80x60	16x9	49x3. 5	500

Wheel:
Materials: Nylon Bearing type: Precision ball bearing Temperature range: -15℃~80℃

ART-NO.					
50080BNYSW	80x38	15x41	10x49	6002x2	300
50100BNYSW	100x38	15x41	10x49	6002x2	400
50125BNYSW	125x38	15x41	10x49	6002x2	500
50150BNYSW	150x38	15x41	10x49	6002x2	600

Swivel Caster

ART-NO.								Kg
50080BNY	80x38	120	42	105x85x4	80x60	16x9	49x3. 5	300
50100BNY	100x38	138	42	105x85x4	80x60	16x9	49x3. 5	500
50125BNY	125x38	163	42	105x85x4	80x60	16x9	49x3. 5	500
50150BNY	150x38	190	42	105x85x4	80x60	16x9	49x3. 5	500

Fixed Caster

ART-NO.								Kg
50080BNYF	80x38	120	105x92x3. 5	80x60	16x9	49x3. 5	300
50100BNYF	100x38	138	105x92x3. 5	80x60	16x9	49x3. 5	500
50125BNYF	125x38	163	105x92x3. 5	80x60	16x9	49x3. 5	500
50150BNYF	150x38	190	105x92x3. 5	80x60	16x9	49x3. 5	500

50 European type medium duty caster

FLYWHEEL

Double Brake Caster,Steel Pedal

ART-NO.								Kg
50080BNYB	80x38	120	42	105x85x4	80x60	16x9	49x3. 5	300
50100BNYB	100x38	138	42	105x85x4	80x60	16x9	49x3. 5	500
50125BNYB	125x38	163	42	105x85x4	80x60	16x9	49x3. 5	500
50150BNYB	150x38	190	42	105x85x4	80x60	16x9	49x3. 5	500

Wheel:
Materials:Cast iron polyurethane Hardness: 90±5 Shore A
Bearing type: Precision ball bearing Temperature range: -15℃~80℃

Cast iron polyurethane

ART-NO.					
50080BCPUSW	80x38	15x41	10x49	6002x2	300
50100BCPUSW	100x38	15x41	10x49	6002x2	350
50125BCPUSW	125x38	15x41	10x49	6002x2	400
50150BCPUSW	150x38	15x41	10x49	6002x2	450

Swivel Caster

ART-NO.								Kg
50080BCPU	80x38	120	42	105x85x4	80x60	16x9	49x3.5	300
50100BCPU	100x38	138	42	105x85x4	80x60	16x9	49x3.5	350
50125BCPU	125x38	163	42	105x85x4	80x60	16x9	49x3.5	400
50150BCPU	150x38	190	42	105x85x4	80x60	16x9	49x3.5	450

Fixed Caster

ART-NO.							Kg
50080BCPUF	80x38	120	105x92x3. 5	80x60	16x9	49x3.5	300
50100BCPUF	100x38	138	105x92x3. 5	80x60	16x9	49x3.5	350
50125BCPUF	125x38	163	105x92x3. 5	80x60	16x9	49x3.5	400
50150BCPUF	150x38	190	105x92x3. 5	80x60	16x9	49x3.5	450

Double Brake Caster,Steel Pedal

ART-NO.								Kg
50080BCPUB	80x38	120	42	105x85x4	80x60	16x9	49x3.5	300
50100BCPUB	100x38	138	42	105x85x4	80x60	16x9	49x3.5	350
50125BCPUB	125x38	163	42	105x85x4	80x60	16x9	49x3.5	400
50150BCPUB	150x38	190	42	105x85x4	80x60	16x9	49x3.5	450

80 European type heavy duty caster

FLYWHEEL

Housing:
Made of pressed steel, yellow zinc plated, double ballrace swivel head,dustproof seal

Wheel:
Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20℃~80℃

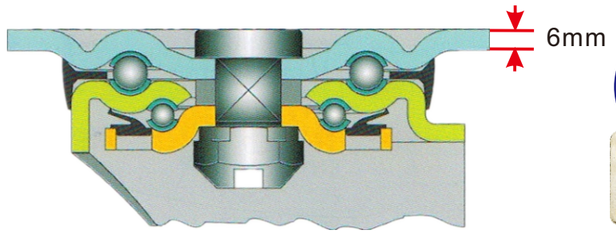



Adjustable brake

Swivel Housing

ART-NO.								
80Y100SH	100x50	142	55	135x110x6	105x80	15x12	63x4	800
80Y125SH	125x50	164	55	135x110x6	105x80	15x12	63x4	800
80Y150SH	150x50	194	55	135x110x6	105x80	15x12	63x4	800
80Y200SH	200x50	239	55	135x110x6	105x80	15x12	63x4	800
80Y250SH	250x50	292	55	135x110x6	105x80	15x12	63x4	800

Fixed Housing

ART-NO.							
80Y100FH	100x50	142	135x110	105x80	15x12	63x4	800
80Y125FH	125x50	164	135x110	105x80	15x12	63x4	800
80Y150FH	150x50	194	135x110	105x80	15x12	63x4	800
80Y200FH	200x50	239	135x110	105x80	15x12	63x4	800
80Y250FH	250x50	292	135x110	105x80	15x12	63x4	800

Double Brake Housing

ART-NO.								
80Y100BH	100x50	142	55	135x110x6	105x80	15x12	63x4	800
80Y125BH	125x50	164	55	135x110x6	105x80	15x12	63x4	800
80Y150BH	150x50	194	55	135x110x6	105x80	15x12	63x4	800
80Y200BH	200x50	239	55	135x110x6	105x80	15x12	63x4	800
80Y250BH	250x50	292	55	135x110x6	105x80	15x12	63x4	800

ART-NO.					
80100BCPUSW	100x50	20x56	12x62	6204x2	450
80125BCPUSW	125x50	20x56	12x62	6204x2	550
80150BCPUSW	150x50	20x56	12x62	6204x2	700
80200BCPUSW	200x50	20x56	12x62	6204x2	1000
80250BCPUSW	250x50	25x56	12x62	6205x2	1200

Swivel Caster

ART-NO.								
80Y100BCPU	100x50	142	55	135x110x6	105x80	15x12	63x4	450
80Y125BCPU	125x50	164	55	135x110x6	105x80	15x12	63x4	550
80Y150BCPU	150x50	194	55	135x110x6	105x80	15x12	63x4	700
80Y200BCPU	200x50	239	55	135x110x6	105x80	15x12	63x4	800
80Y250BCPU	250x50	292	55	135x110x6	105x80	15x12	63x4	800

80 European type heavy duty caster

FLYWHEEL

Fixed Caster

ART-NO.							
80Y100BCPUF	100x50	142	135x110	105x80	15x12	63x4	450
80Y125BCPUF	125x50	164	135x110	105x80	15x12	63x4	550
80Y150BCPUF	150x50	194	135x110	105x80	15x12	63x4	700
80Y200BCPUF	200x50	239	135x110	105x80	15x12	63x4	800
80Y250BCPUF	250x50	292	135x110	105x80	15x12	63x4	800

Double Brake Caster

ART-NO.								
80Y100BCPUB	100x50	142	55	135x110x6	105x80	15x12	63x4	450
80Y125BCPUB	125x50	164	55	135x110x6	105x80	15x12	63x4	550
80Y150BCPUB	150x50	194	55	135x110x6	105x80	15x12	63x4	700
80Y200BCPUB	200x50	239	55	135x110x6	105x80	15x12	63x4	800
80Y250BCPUB	250x50	292	55	135x110x6	105x80	15x12	63x4	800

Wheel:
Materials: Nylon, smooth tread
Bearing type: Precision double ball bearing
Temperature range: -15℃~80℃

ART-NO.					
80100BNYSW	100x50	20x55	13x62	6004x2	500
80125BNYSW	125x50	20x55	13x62	6004x2	700
80150BNYSW	150x50	20x55	13x62	6004x2	800
80200BNYSW	200x50	20x55	13x62	6004x2	1000

Swivel Caster

ART-NO.								
80Y100BNY	100x50	142	55	135x110x6	105x80	15x12	63x4	500
80Y125BNY	125x50	164	55	135x110x6	105x80	15x12	63x4	700
80Y150BNY	150x50	194	55	135x110x6	105x80	15x12	63x4	800
80Y200BNY	200x50	239	55	135x110x6	105x80	15x12	63x4	800

Fixed Caster

ART-NO.							
80Y100BNYF	100x50	142	135x110	105x80	15x12	63x4	500
80Y125BNYF	125x50	164	135x110	105x80	15x12	63x4	700
80Y150BNYF	150x50	194	135x110	105x80	15x12	63x4	800
80Y200BNYF	200x50	239	135x110	105x80	15x12	63x4	800

Double Brake Caster

ART-NO.								
80Y100BNYB	100x50	142	55	135x110x6	105x80	15x12	63x4	500
80Y125BNYB	125x50	164	55	135x110x6	105x80	15x12	63x4	700
80Y150BNYB	150x50	194	55	135x110x6	105x80	15x12	63x4	800
80Y200BNYB	200x50	239	55	135x110x6	105x80	15x12	63x4	800

80 European type heavy duty caster

Housing:
Made of pressed steel, yellow zinc plated, double ballrace swivel head,dustproof seal

Wheel:
Materials: Aluminium core elasic rubber
Hardness: 70±3 Shore A
Bearing type: Precision double ball bearing
Temperature range: -5°C~70°C
Nonmarking,durable,good shock absorbent

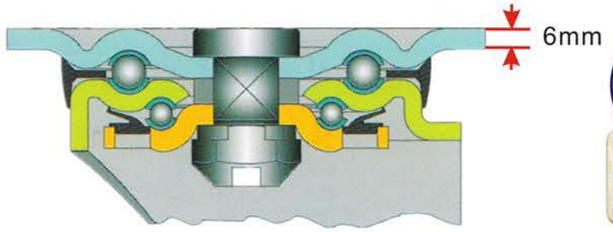

Adjustable brake

ART-NO.					Kg
80125BABLSW	125x50	20x60	12x62	6204x2	250
80150BABLSW	150x50	20x60	12x62	6204x2	300
80160BABLSW	160x50	20x60	12x62	6204x2	350
80200BABLSW	200x50	20x60	12x62	6204x2	450
80250BABLSW	250x50	25x60	12x62	6205x2	600

Swivel Caster

ART-NO.								Kg
80Y125BABL	125x50	164	55	135x110x6	105x80	15x12	63x4	250
80Y150BABL	150x50	194	55	135x110x6	105x80	15x12	63x4	300
80Y160BABL	160x50	199	55	135x110x6	105x80	15x12	63x4	350
80Y200BABL	200x50	239	55	135x110x6	105x80	15x12	63x4	450
80Y250BABL	250x50	292	55	135x110x6	105x80	15x12	63x4	600

Fixed Caster

ART-NO.							Kg
80Y125BABLF	125x50	164	135x110	105x80	15x12	63x4	250
80Y150BABLF	150x50	194	135x110	105x80	15x12	63x4	300
80Y160BABLF	160x50	199	135x110	105x80	15x12	63x4	350
80Y200BABLF	200x50	239	135x110	105x80	15x12	63x4	450
80Y250BABLF	250x50	292	135x110	105x80	15x12	63x4	600

Double Brake Caster

ART-NO.								Kg
80Y125BABLB	125x50	164	55	135x110x6	105x80	15x12	63x4	250
80Y150BABLB	150x50	194	55	135x110x6	105x80	15x12	63x4	300
80Y160BABLB	160x50	199	55	135x110x6	105x80	15x12	63x4	350
80Y200BABLB	200x50	239	55	135x110x6	105x80	15x12	63x4	450
80Y250BABLB	250x50	292	55	135x110x6	105x80	15x12	63x4	600

White zinc plated is optional

80 European type heavy duty caster

Housing:
Made of pressed steel, yellow zinc plated, double ballrace swivel head,dustproof seal

Wheel:
Materials: Aluminium core polyurethane
Hardness:90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20°C~80°C

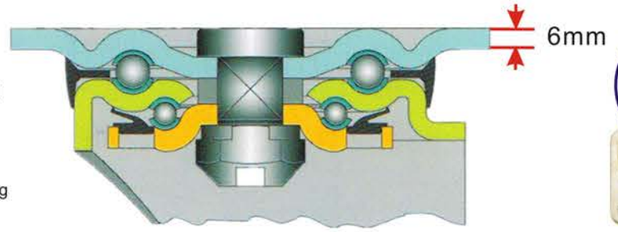

Adjustable brake

ART-NO.					Kg
80100BAPUSW	100x50	20x60	12x62	6204x2	300
80125BAPUSW	125x50	20x60	12x62	6204x2	450
80150BAPUSW	150x50	20x60	12x62	6204x2	550
80160BAPUSW	160x50	20x60	12x62	6204x2	600
80200BAPUSW	200x50	20x60	12x62	6204x2	800
80250BAPUSW	250x50	25x60	12x62	6205x2	1000

Swivel Caster

ART-NO.								Kg
80Y100BAPU	100x50	142	55	135x110x6	105x80	15x12	63x4	300
80Y125BAPU	125x50	164	55	135x110x6	105x80	15x12	63x4	450
80Y150BAPU	150x50	194	55	135x110x6	105x80	15x12	63x4	550
80Y160BAPU	160x50	199	55	135x110x6	105x80	15x12	63x4	600
80Y200BAPU	200x50	239	55	135x110x6	105x80	15x12	63x4	800
80Y250BAPU	250x50	292	55	135x110x6	105x80	15x12	63x4	800

Fixed Caster

ART-NO.							Kg
80Y100BAPUF	100x50	142	135x110	105x80	15x12	63x4	300
80Y125BAPUF	125x50	164	135x110	105x80	15x12	63x4	450
80Y150BAPUF	150x50	194	135x110	105x80	15x12	63x4	550
80Y160BAPUF	160x50	199	135x110	105x80	15x12	63x4	600
80Y200BAPUF	200x50	239	135x110	105x80	15x12	63x4	800
80Y250BAPUF	250x50	292	135x110	105x80	15x12	63x4	800

Double Brake Caster

ART-NO.								Kg
80Y100BAPUB	100x50	142	55	135x110x6	105x80	15x12	63x4	300
80Y125BAPUB	125x50	164	55	135x110x6	105x80	15x12	63x4	450
80Y150BAPUB	150x50	194	55	135x110x6	105x80	15x12	63x4	550
80Y160BAPUB	160x50	199	55	135x110x6	105x80	15x12	63x4	600
80Y200BAPUB	200x50	239	55	135x110x6	105x80	15x12	63x4	800
80Y250BAPUB	250x50	292	55	135x110x6	105x80	15x12	63x4	800

White zinc plated is optional

N29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
powder coated, double ballrace swivel head
dustproof seal,heat treated ballrace,
hardened steel balls

Wheel:

Materials: Polyurethane tread,plastic core
Hardness: 98 Shore A
Bearing type: Precision double ball bearing
Temperature range: : -5°C~80°C

ART-NO.					Kg
N29100BPUPPSW	100x45	17x62	12x62	6203x2	270
N29125BPUPPSW	125x45	17x62	12x62	6203x2	330
N29150BPUPPSW	150x45	17x62	12x62	6203x2	380
N29200BPUPPSW	200x45	17x62	12x62	6203x2	410

Swivel Caster

ART-NO.								Kg
N29100BPUPP	100x45	142	35	115x100x6	72x85	19x10	62x6	270
N29125BPUPP	125x45	164	39	115x100x6	72x85	19x10	62x6	330
N29150BPUPP	150x45	190	45	115x100x6	72x85	19x10	62x6	380
N29200BPUPP	200x45	240	56	115x100x6	72x85	19x10	62x6	410

Fixed Caster

ART-NO.							Kg
N29100BPUPPF	100x45	142	115x100x6	72x85	19x10	62x6	270
N29125BPUPPF	125x45	164	115x100x6	72x85	19x10	62x6	330
N29150BPUPPF	150x45	190	115x100x6	72x85	19x10	62x6	380
N29200BPUPPF	200x45	240	115x100x6	72x85	19x10	62x6	410

Side Brake Caster

ART-NO.								Kg
N29100BPUPPB1	100x45	142	35	115x100x6	72x85	19x10	62x6	270
N29125BPUPPB1	125x45	164	39	115x100x6	72x85	19x10	62x6	330
N29150BPUPPB1	150x45	190	45	115x100x6	72x85	19x10	62x6	380
N29200BPUPPB1	200x45	240	56	115x100x6	72x85	19x10	62x6	410

Double Brake Caster

ART-NO.								Kg
N29100BPUPPB2	100x45	142	35	115x100x6	72x85	19x10	62x6	270
N29125BPUPPB2	125x45	164	39	115x100x6	72x85	19x10	62x6	330
N29150BPUPPB2	150x45	190	45	115x100x6	72x85	19x10	62x6	380
N29200BPUPPB2	200x45	240	56	115x100x6	72x85	19x10	62x6	410



Directional Lock

Rainbow zinc is available

European type plate is available

N29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
powder coated, double ballrace swivel head
dustproof seal,heat treated ballrace,
hardened steel balls

Wheel:

Materials: Nylon tread,plastic core
Bearing type: Precision double ball bearing
Temperature range: -5°C~80°C
Plastic on PP core wheel is available.

ART-NO.					Kg
N29100BNYPPSW	100x45	17x62	12x62	6203x2	300
N29125BNYPPSW	125x45	17x62	12x62	6203x2	360
N29150BNYPPSW	150x45	17x62	12x62	6203x2	430
N29200BNYPPSW	200x45	17x62	12x62	6203x2	460

Swivel Caster

ART-NO.								Kg
N29100BNYPP	100x45	142	35	115x100x6	72x85	19x10	62x6	300
N29125BNYPP	125x45	164	39	115x100x6	72x85	19x10	62x6	360
N29150BNYPP	150x45	190	45	115x100x6	72x85	19x10	62x6	430
N29200BNYPP	200x45	240	56	115x100x6	72x85	19x10	62x6	460

Fixed Caster

ART-NO.							Kg
N29100BNYPPF	100x45	142	115x100x6	72x85	19x10	62x6	300
N29125BNYPPF	125x45	164	115x100x6	72x85	19x10	62x6	360
N29150BNYPPF	150x45	190	115x100x6	72x85	19x10	62x6	430
N29200BNYPPF	200x45	240	115x100x6	72x85	19x10	62x6	460

Side Brake Caster

ART-NO.								Kg
N29100BNYPPB1	100x45	142	35	115x100x6	72x85	19x10	62x6	300
N29125BNYPPB1	125x45	164	39	115x100x6	72x85	19x10	62x6	360
N29150BNYPPB1	150x45	190	45	115x100x6	72x85	19x10	62x6	430
N29200BNYPPB1	200x45	240	56	115x100x6	72x85	19x10	62x6	460

Double Brake Caster

ART-NO.								Kg
N29100BNYPPB2	100x45	142	35	115x100x6	72x85	19x10	62x6	300
N29125BNYPPB2	125x45	164	39	115x100x6	72x85	19x10	62x6	360
N29150BNYPPB2	150x45	190	45	115x100x6	72x85	19x10	62x6	430
N29200BNYPPB2	200x45	240	56	115x100x6	72x85	19x10	62x6	460



Directional Lock

Rainbow zinc is available

European type plate is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head
dustproof seal

Wheel:

Materials: Mold on rubber
Hardness: 85±3 Shore A
Bearing type: Steel roller bearing
Temperature range: -5°C~50°C

ART-NO.				Kg
29100SW	100x50	12x62		120
29125SW	125x50	12x62		140
29150SW	150x50	12x62		220
29200SW	200x50	12x62		240
29250SW	250x50	12x62		300

Swivel Caster

ART-NO.								Kg
29100	100x50	142	35	115x100x6	72x85	19x10	62x6	120
29125	125x50	164	39	115x100x6	72x85	19x10	62x6	140
29150	150x50	190	45	115x100x6	72x85	19x10	62x6	220
29200	200x50	240	56	115x100x6	72x85	19x10	62x6	240
29250	250x50	280	63	115x100x6	72x85	19x10	62x6	300

Fixed Caster

ART-NO.							Kg
29100F	100x50	142	115x100x6	72x85	19x10	62x6	120
29125F	125x50	164	115x100x6	72x85	19x10	62x6	140
29150F	150x50	190	115x100x6	72x85	19x10	62x6	220
29200F	200x50	240	115x100x6	72x85	19x10	62x6	240
29250F	250x50	280	115x100x6	72x85	19x10	62x6	300

Side Brake Caster

ART-NO.								Kg
29100B1	100x50	142	35	115x100x6	72x85	19x10	62x6	120
29125B1	125x50	164	39	115x100x6	72x85	19x10	62x6	140
29150B1	150x50	190	45	115x100x6	72x85	19x10	62x6	220
29200B1	200x50	240	56	115x100x6	72x85	19x10	62x6	240
29250B1	250x50	280	63	115x100x6	72x85	19x10	62x6	300

Double Brake Caster

ART-NO.								Kg
29100B2	100x50	142	35	115x100x6	72x85	19x10	62x6	120
29125B2	125x50	164	39	115x100x6	72x85	19x10	62x6	140
29150B2	150x50	190	45	115x100x6	72x85	19x10	62x6	220
29200B2	200x50	240	56	115x100x6	72x85	19x10	62x6	240
29250B2	250x50	280	63	115x100x6	72x85	19x10	62x6	300



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head
dustproof seal

Wheel:

Materials: Thermoplastic rubber
Hardness: 85±5 Shore A
Bearing type: Steel roller bearing
Temperature range: -5°C~80°C
Nonmarking,durable,good shock absorbent

ART-NO.				Kg
29100TPRSW	100x50	12x62		120
29125TPRSW	125x50	12x62		150
29150TPRSW	150x50	12x62		200
29200TPRSW	200x50	12x62		240

Swivel Caster

ART-NO.								Kg
29100TPR	100x50	142	35	115x100x6	72x85	19x10	62x6	120
29125TPR	125x50	164	39	115x100x6	72x85	19x10	62x6	150
29150TPR	150x50	190	45	115x100x6	72x85	19x10	62x6	200
29200TPR	200x50	240	56	115x100x6	72x85	19x10	62x6	240

Fixed Caster

ART-NO.							Kg
29100TPRF	100x50	142	115x100x6	72x85	19x10	62x6	120
29125TPRF	125x50	164	115x100x6	72x85	19x10	62x6	150
29150TPRF	150x50	190	115x100x6	72x85	19x10	62x6	200
29200TPRF	200x50	240	115x100x6	72x85	19x10	62x6	240

Side Brake Caster

ART-NO.								Kg
29100TPRB1	100x50	142	35	115x100x6	72x85	19x10	62x6	120
29125TPRB1	125x50	164	39	115x100x6	72x85	19x10	62x6	150
29150TPRB1	150x50	190	45	115x100x6	72x85	19x10	62x6	200
29200TPRB1	200x50	240	56	115x100x6	72x85	19x10	62x6	240

Double Brake Caster

ART-NO.								Kg
29100TPRB2	100x50	142	35	115x100x6	72x85	19x10	62x6	120
29125TPRB2	125x50	164	39	115x100x6	72x85	19x10	62x6	150
29150TPRB2	150x50	190	45	115x100x6	72x85	19x10	62x6	200
29200TPRB2	200x50	240	56	115x100x6	72x85	19x10	62x6	240



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head
dustproof seal

Wheel:

Materials: Plastic core polyurethane
Hardness: 90±5 Shore A
Bearing type: Steel roller bearing
Temperature range: -5°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.				Kg
29100PUSW	100x50	12x62		140
29125PUSW	125x50	12x62		200
29150PUSW	150x50	12x62		220
29200PUSW	200x50	12x62		250

Swivel Caster

ART-NO.								Kg
29100PU	100x50	142	35	115x100x6	72x85	19x10	62x6	140
29125PU	125x50	164	39	115x100x6	72x85	19x10	62x6	200
29150PU	150x50	190	45	115x100x6	72x85	19x10	62x6	220
29200PU	200x50	240	56	115x100x6	72x85	19x10	62x6	250

Fixed Caster

ART-NO.							Kg
29100PUF	100x50	142	115x100x6	72x85	19x10	62x6	140
29125PUF	125x50	164	115x100x6	72x85	19x10	62x6	200
29150PUF	150x50	190	115x100x6	72x85	19x10	62x6	220
29200PUF	200x50	240	115x100x6	72x85	19x10	62x6	250

Side Brake Caster

ART-NO.								Kg
29100PUB1	100x50	142	35	115x100x6	72x85	19x10	62x6	140
29125PUB1	125x50	164	39	115x100x6	72x85	19x10	62x6	200
29150PUB1	150x50	190	45	115x100x6	72x85	19x10	62x6	220
29200PUB1	200x50	240	56	115x100x6	72x85	19x10	62x6	250

Double Brake Caster

ART-NO.								Kg
29100PUB2	100x50	142	35	115x100x6	72x85	19x10	62x6	140
29125PUB2	125x50	164	39	115x100x6	72x85	19x10	62x6	200
29150PUB2	150x50	190	45	115x100x6	72x85	19x10	62x6	220
29200PUB2	200x50	240	56	115x100x6	72x85	19x10	62x6	250



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal

Wheel:

Materials: Steel core polyurethane
Hardness: 90±5 Shore A
Bearing type: Steel roller bearing
Temperature range: -20°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.				Kg
29075CPUSW	75x50	12x62		200
29100CPUSW	100x50	12x62		200
29125CPUSW	125x50	12x62		250
29150CPUSW	150x50	12x62		300
29200CPUSW	200x50	12x62		350
29250CPUSW	250x50	12x62		400

Swivel Caster

ART-NO.								Kg
29075CPU	75x50	118	28	115x100x6	72x85	19x10	62x6	200
29100CPU	100x50	142	35	115x100x6	72x85	19x10	62x6	200
29125CPU	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150CPU	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200CPU	200x50	240	56	115x100x6	72x85	19x10	62x6	350
29250CPU	250x50	280	63	115x100x6	72x85	19x10	62x6	400

Fixed Caster

ART-NO.							Kg
29075CPUF	75x50	118	115x100x6	72x85	19x10	62x6	200
29100CPUF	100x50	142	115x100x6	72x85	19x10	62x6	200
29125CPUF	125x50	164	115x100x6	72x85	19x10	62x6	250
29150CPUF	150x50	190	115x100x6	72x85	19x10	62x6	300
29200CPUF	200x50	240	115x100x6	72x85	19x10	62x6	350
29250CPUF	250x50	280	115x100x6	72x85	19x10	62x6	400

Side Brake Caster

ART-NO.								Kg
29075CPUB1	75x50	118	28	115x100x6	72x85	19x10	62x6	200
29100CPUB1	100x50	142	35	115x100x6	72x85	19x10	62x6	200
29125CPUB1	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150CPUB1	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200CPUB1	200x50	240	56	115x100x6	72x85	19x10	62x6	350
29250CPUB1	250x50	280	63	115x100x6	72x85	19x10	62x6	400

Double Brake Caster

ART-NO.								Kg
29075CPUB2	75x50	118	28	115x100x6	72x85	19x10	62x6	200
29100CPUB2	100x50	142	35	115x100x6	72x85	19x10	62x6	200
29125CPUB2	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150CPUB2	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200CPUB2	200x50	240	56	115x100x6	72x85	19x10	62x6	350
29250CPUB2	250x50	280	63	115x100x6	72x85	19x10	62x6	400



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:
Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal,heat treated ballrace,
hardened steel balls

Wheel:
Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.					Kg
29100BCPUSW	100x50	17x56	12x62	6203x2	360
29125BCPUSW	125x50	17x56	12x62	6203x2	450
29150BCPUSW	150x50	17x56	12x62	6203x2	560
29200BCPUSW	200x50	17x56	12x62	6203x2	670
29250BCPUSW	250x50	25x56	12x62	6205x2	800

Swivel Caster

ART-NO.								Kg
29100BCPU	100x50	142	35	115x100x6	72x85	19x10	62x6	360
29125BCPU	125x50	164	39	115x100x6	72x85	19x10	62x6	450
29150BCPU	150x50	190	45	115x100x6	72x85	19x10	62x6	560
29200BCPU	200x50	240	56	115x100x6	72x85	19x10	62x6	670
29250BCPU	250x50	280	63	115x100x6	72x85	19x10	62x6	700

Fixed Caster

ART-NO.							Kg
29100BCPUF	100x50	142	115x100x6	72x85	19x10	62x6	360
29125BCPUF	125x50	164	115x100x6	72x85	19x10	62x6	450
29150BCPUF	150x50	190	115x100x6	72x85	19x10	62x6	560
29200BCPUF	200x50	240	115x100x6	72x85	19x10	62x6	670
29250BCPUF	250x50	280	115x100x6	72x85	19x10	62x6	700

Side Brake Caster

ART-NO.								Kg
29100BCPUB1	100x50	142	35	115x100x6	72x85	19x10	62x6	360
29125BCPUB1	125x50	164	39	115x100x6	72x85	19x10	62x6	450
29150BCPUB1	150x50	190	45	115x100x6	72x85	19x10	62x6	560
29200BCPUB1	200x50	240	56	115x100x6	72x85	19x10	62x6	670
29250BCPUB1	250x50	280	63	115x100x6	72x85	19x10	62x6	700

Double Brake Caster

ART-NO.								Kg
29100BCPUB2	100x50	142	35	115x100x6	72x85	19x10	62x6	360
29125BCPUB2	125x50	164	39	115x100x6	72x85	19x10	62x6	450
29150BCPUB2	150x50	190	45	115x100x6	72x85	19x10	62x6	560
29200BCPUB2	200x50	240	56	115x100x6	72x85	19x10	62x6	670
29250BCPUB2	250x50	280	63	115x100x6	72x85	19x10	62x6	700



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:
Solid steel welded construction,
zinc plated, double ballrace swivel head
dustproof seal,heat treated ballrace
hardened steel balls

Wheel:
Materials: Aluminium core polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.					Kg
29100BAPUSW	100x50	20x60	12x62	6204x2	300
29125BAPUSW	125x50	20x60	12x62	6204x2	450
29150BAPUSW	150x50	20x60	12x62	6204x2	550
29200BAPUSW	200x50	20x60	12x62	6204x2	800
29250BAPUSW	200x50	20x60	12x62	6205x2	1000

Swivel Caster

ART-NO.								Kg
29100BAPU	100x50	142	35	115x100x6	72x85	19x10	62x6	300
29125BAPU	125x50	164	39	115x100x6	72x85	19x10	62x6	450
29150BAPU	150x50	190	45	115x100x6	72x85	19x10	62x6	550
29200BAPU	200x50	240	56	115x100x6	72x85	19x10	62x6	700
29250BAPU	250x50	280	63	115x100x6	72x85	19x10	62x6	700

Fixed Caster

ART-NO.							Kg
29100BAPUF	100x50	142	115x100x6	72x85	19x10	62x6	300
29125BAPUF	125x50	164	115x100x6	72x85	19x10	62x6	450
29150BAPUF	150x50	190	115x100x6	72x85	19x10	62x6	550
29200BAPUF	200x50	240	115x100x6	72x85	19x10	62x6	700
29250BAPUF	250x50	280	115x100x6	72x85	19x10	62x6	700

Side Brake Caster

ART-NO.								Kg
29100BAPUB1	100x50	142	35	115x100x6	72x85	19x10	62x6	300
29125BAPUB1	125x50	164	39	115x100x6	72x85	19x10	62x6	450
29150BAPUB1	150x50	190	45	115x100x6	72x85	19x10	62x6	550
29200BAPUB1	200x50	240	56	115x100x6	72x85	19x10	62x6	700
29250BAPUB1	250x50	280	63	115x100x6	72x85	19x10	62x6	700

Double Brake Caster

ART-NO.								Kg
29100BAPUB2	100x50	142	35	115x100x6	72x85	19x10	62x6	300
29125BAPUB2	125x50	164	39	115x100x6	72x85	19x10	62x6	450
29150BAPUB2	150x50	190	45	115x100x6	72x85	19x10	62x6	550
29200BAPUB2	200x50	240	56	115x100x6	72x85	19x10	62x6	700
29250BAPUB2	250x50	280	63	115x100x6	72x85	19x10	62x6	700



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal

Wheel:

Materials: Aluminium core elastic rubber
Hardness: 70±3 Shore A
Bearing type: Precision double ball bearing
Temperature range: -5°C ~ 70°C
Nonmarking,durable,good shock absorbent

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.					Kg
29125BABLSW	125x50	20x60	12x62	6204x2	250
29150BABLSW	150x50	20x60	12x62	6204x2	300
29200BABLSW	200x50	20x60	12x62	6204x2	450
29250BABLSW	250x50	25x60	12x62	6205x2	600

Swivel Caster

ART-NO.								Kg
29125BABL	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150BABL	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200BABL	200x50	240	56	115x100x6	72x85	19x10	62x6	450
29250BABL	250x50	280	63	115x100x6	72x85	19x10	62x6	600

Fixed Caster

ART-NO.							Kg
29125BABLF	125x50	164	115x100x6	72x85	19x10	62x6	250
29150BABLF	150x50	190	115x100x6	72x85	19x10	62x6	300
29200BABLF	200x50	240	115x100x6	72x85	19x10	62x6	450
29250BABLF	250x50	280	115x100x6	72x85	19x10	62x6	600

Side Brake Caster

ART-NO.								Kg
29125BABLB1	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150BABLB1	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200BABLB1	200x50	240	56	115x100x6	72x85	19x10	62x6	450
29250BABLB1	250x50	280	63	115x100x6	72x85	19x10	62x6	600

Double Brake Caster

ART-NO.								Kg
29125BABLB2	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150BABLB2	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200BABLB2	200x50	240	56	115x100x6	72x85	19x10	62x6	450
29250BABLB2	250x50	280	63	115x100x6	72x85	19x10	62x6	600



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal

Wheel:

Materials: Plastic
Bearing type: Steel roller bearing
Temperature range: -5°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.				
29100PPSW	100x50	12x62		200
29125PPSW	125x50	12x62		220
29150PPSW	150x50	12x62		300
29200PPSW	200x50	12x62		350

Swivel Caster

ART-NO.								Kg
29100PP	100x50	142	35	115x100x6	72x85	19x10	62x6	200
29125PP	125x50	164	39	115x100x6	72x85	19x10	62x6	220
29150PP	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200PP	200x50	240	56	115x100x6	72x85	19x10	62x6	350

Fixed Caster

ART-NO.							Kg
29100PPF	100x50	142	115x100x6	72x85	19x10	62x6	200
29125PPF	125x50	164	115x100x6	72x85	19x10	62x6	220
29150PPF	150x50	190	115x100x6	72x85	19x10	62x6	300
29200PPF	200x50	240	115x100x6	72x85	19x10	62x6	350

Side Brake Caster

ART-NO.								Kg
29100PPB1	100x50	142	35	115x100x6	72x85	19x10	62x6	200
29125PPB1	125x50	164	39	115x100x6	72x85	19x10	62x6	220
29150PPB1	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200PPB1	200x50	240	56	115x100x6	72x85	19x10	62x6	350

Double Brake Caster

ART-NO.								Kg
29100PPB2	100x50	142	35	115x100x6	72x85	19x10	62x6	200
29125PPB2	125x50	164	39	115x100x6	72x85	19x10	62x6	220
29150PPB2	150x50	190	45	115x100x6	72x85	19x10	62x6	300
29200PPB2	200x50	240	56	115x100x6	72x85	19x10	62x6	350



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:
Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal,heat treated ballrace,
Hardened steel balls

Wheel:
Materials: Nylon,smooth tread
Bearing type: Precision double ball bearing
Temperature range: -15°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.					Kg
2910050BNYSW	100x50	20x55	12x62	6004x2	500
2912550BNYSW	125x50	20x55	12x62	6004x2	700
2915050BNYSW	150x50	20x55	12x62	6004x2	800
2920050BNYSW	200x50	20x55	12x62	6004x2	1000

Swivel Caster

ART-NO.								Kg
2910050BNY	100x50	142	35	115x100x6	72x85	19x10	62x6	500
2912550BNY	125x50	164	39	115x100x6	72x85	19x10	62x6	700
2915050BNY	150x50	190	45	115x100x6	72x85	19x10	62x6	700
2920050BNY	200x50	240	56	115x100x6	72x85	19x10	62x6	700

Fixed Caster

ART-NO.							Kg
2910050BNYF	100x50	142	115x100x6	72x85	19x10	62x6	500
2912550BNYF	125x50	164	115x100x6	72x85	19x10	62x6	700
2915050BNYF	150x50	190	115x100x6	72x85	19x10	62x6	700
2920050BNYF	200x50	240	115x100x6	72x85	19x10	62x6	700

Side Brake Caster

ART-NO.								Kg
2910050BNYB1	100x50	142	35	115x100x6	72x85	19x10	62x6	500
2912550BNYB1	125x50	164	39	115x100x6	72x85	19x10	62x6	700
2915050BNYB1	150x50	190	45	115x100x6	72x85	19x10	62x6	700
2920050BNYB1	200x50	240	56	115x100x6	72x85	19x10	62x6	700

Double Brake Caster

ART-NO.								Kg
2910050BNYB2	100x50	142	35	115x100x6	72x85	19x10	62x6	500
2912550BNYB2	125x50	164	39	115x100x6	72x85	19x10	62x6	700
2915050BNYB2	150x50	190	45	115x100x6	72x85	19x10	62x6	700
2920050BNYB2	200x50	240	56	115x100x6	72x85	19x10	62x6	700



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:
Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal,heat treated ballrace,
Hardened steel balls

Wheel:
Materials: Nylon,pattern tread
Bearing type: Precision double ball bearing
Temperature range: -15°C~80°C

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.					Kg
2910045BNYSW	100x45	17x55.6	12x62	6203x2	500
2912545BNYSW	125x45	17x55.6	12x62	6203x2	700
2915045BNYSW	150x45	17x55.6	12x62	6203x2	800
2920045BNYSW	200x45	17x55.6	12x62	6203x2	1000

Swivel Caster

ART-NO.								Kg
2910045BNY	100x45	142	35	115x100x6	72x85	19x10	62x6	500
2912545BNY	125x45	164	39	115x100x6	72x85	19x10	62x6	700
2915045BNY	150x45	190	45	115x100x6	72x85	19x10	62x6	700
2920045BNY	200x45	240	56	115x100x6	72x85	19x10	62x6	700

Fixed Caster

ART-NO.							Kg
2910045BNYF	100x45	142	115x100x6	72x85	19x10	62x6	500
2912545BNYF	125x45	164	115x100x6	72x85	19x10	62x6	700
2915045BNYF	150x45	190	115x100x6	72x85	19x10	62x6	700
2920045BNYF	200x45	240	115x100x6	72x85	19x10	62x6	700

Side Brake Caster

ART-NO.								Kg
2910045BNYB1	100x45	142	35	115x100x6	72x85	19x10	62x6	500
2912545BNYB1	125x45	164	39	115x100x6	72x85	19x10	62x6	700
2915045BNYB1	150x45	190	45	115x100x6	72x85	19x10	62x6	700
2920045BNYB1	200x45	240	56	115x100x6	72x85	19x10	62x6	700

Double Brake Caster

ART-NO.								Kg
2910045BNYB2	100x45	142	35	115x100x6	72x85	19x10	62x6	500
2912545BNYB2	125x45	164	39	115x100x6	72x85	19x10	62x6	700
2915045BNYB2	150x45	190	45	115x100x6	72x85	19x10	62x6	700
2920045BNYB2	200x45	240	56	115x100x6	72x85	19x10	62x6	700



European type plate is available

New desgin housing
N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal

Wheel:

Materials: **Korean** Steel core polyurethane
Hardness: 95±5 Shore A
Bearing type: Precision double ball bearing
Roller bearing
Temperature range: -20°C~80°C

ART-NO.						
29100KBCPUSW	29100KRCPUSW	100x50	12x62	6203x2		200
29125KBCPUSW	29125KRCPUSW	125x50	12x62	6203x2		250
29150KBCPUSW	29150KRCPUSW	150x50	12x62	6203x2		300
29200KBCPUSW	29200KRCPUSW	200x50	12x62	6203x2		350

Swivel Caster

ART-NO.									
29100KBCPU	100x50	142	35	115x100x6	72x85	19x10	62x6	6203x2	200
29125KBCPU	125x50	164	39	115x100x6	72x85	19x10	62x6	6203x2	250
29150KBCPU	150x50	190	45	115x100x6	72x85	19x10	62x6	6203x2	300
29200KBCPU	200x50	240	56	115x100x6	72x85	19x10	62x6	6203x2	350

Fixed Caster

ART-NO.								
29100KBCPUF	100x50	142	115x100x6	72x85	19x10	62x6	6203x2	200
29125KBCPUF	125x50	164	115x100x6	72x85	19x10	62x6	6203x2	250
29150KBCPUF	150x50	190	115x100x6	72x85	19x10	62x6	6203x2	300
29200KBCPUF	200x50	240	115x100x6	72x85	19x10	62x6	6203x2	350

Side Brake Caster

ART-NO.									
29100KBCPUB1	100x50	142	35	115x100x6	72x85	19x10	62x6	6203x2	200
29125KBCPUB1	125x50	164	39	115x100x6	72x85	19x10	62x6	6203x2	250
29150KBCPUB1	150x50	190	45	115x100x6	72x85	19x10	62x6	6203x2	300
29200KBCPUB1	200x50	240	56	115x100x6	72x85	19x10	62x6	6203x2	350

Double Brake Caster

ART-NO.									
29100KBCPUB2	100x50	142	35	115x100x6	72x85	19x10	62x6	6203x2	200
29125KBCPUB2	125x50	164	39	115x100x6	72x85	19x10	62x6	6203x2	250
29150KBCPUB2	150x50	190	45	115x100x6	72x85	19x10	62x6	6203x2	300
29200KBCPUB2	200x50	240	56	115x100x6	72x85	19x10	62x6	6203x2	350



European type plate is available

Roller Bearing options

New desgin housing
N29 instead of 29

With thread guard
is optional

Rainbow zinc is available

Directional Lock

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal

Wheel:

Materials: Steel core black rubber
Bearing tye: Precision double ball bearing
Temperature range: -5°C~50°C

ART-NO.				
29160RSW	160x50	12x62	6203x2	100
29200RSW	200x50	12x62	6203x2	120

Swivel Caster

ART-NO.								
29160R	160x50	190	45	114x100x6	85x72	10x19	100x6	100
29200R	200x50	240	56	114x100x6	85x72	10x19	100x6	120

Fixed Caster

ART-NO.							
29160RF	160x50	190	114x100x6	85x72	10x19	100x6	100
29200RF	200x50	240	114x100x6	85x72	10x19	100x6	120

Side Brake Caster

ART-NO.							
29160RB1	160x50	190	114x100x6	85x72	10x19	100x6	100
29200RB1	200x50	240	114x100x6	85x72	10x19	100x6	120

Double Brake Caster

ART-NO.							
29160RB2	160x50	190	114x100x6	85x72	10x19	100x6	100
29200RB2	200x50	240	114x100x6	85x72	10x19	100x6	120



European type plate is available

New desgin housing
N29 instead of 29

Rainbow zinc is available

Directional Lock

29 Heavy duty caster

FLYWHEEL

Housing:
Solid steel welded construction, zinc plated, double ballrace swivel head, dustproof seal

Wheel: (Europen Design)
Materials: Elastic rubber
Hardness: 70±3 Shore A
Bearing type: Precision double ball bearing
Temperature range: -5°C~70°C

AVAILABLE IN Inox 304 STAINLESS STEEL

Wheel options:

29XXXRBL

ART-NO.				Kg
29125BBLSW	125x50	12x60	6204x2	250
29150BBLSW	150x50	12x60	6204x2	350
29200BBLSW	200x50	12x60	6204x2	400
29250BBLSW	250x50	12x60	6205x2	600

Swivel Caster

ART-NO.								Kg
29125BBL	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150BBL	150x50	190	45	115x100x6	72x85	19x10	62x6	350
29200BBL	200x50	240	56	115x100x6	72x85	19x10	62x6	400
29250BBL	250x50	280	63	115x100x6	72x85	19x10	62x6	600

Fixed Caster

ART-NO.							Kg
29125BBLF	125x50	164	115x100x6	72x85	19x10	62x6	250
29150BBLF	150x50	190	115x100x6	72x85	19x10	62x6	350
29200BBLF	200x50	240	115x100x6	72x85	19x10	62x6	400
29250BBLF	250x50	280	115x100x6	72x85	19x10	62x6	600

Side Brake Caster

ART-NO.								Kg
29125BBLB1	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150BBLB1	150x50	190	45	115x100x6	72x85	19x10	62x6	350
29200BBLB1	200x50	240	56	115x100x6	72x85	19x10	62x6	400
29250BBLB1	250x50	280	63	115x100x6	72x85	19x10	62x6	600

Double Brake Caster

ART-NO.								Kg
29125BBLB2	125x50	164	39	115x100x6	72x85	19x10	62x6	250
29150BBLB2	150x50	190	45	115x100x6	72x85	19x10	62x6	350
29200BBLB2	200x50	240	56	115x100x6	72x85	19x10	62x6	400
29250BBLB2	250x50	280	63	115x100x6	72x85	19x10	62x6	600



European type plate is available

New desgin housing N29 instead of 29

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:
Solid steel welded construction, zinc plated, double ballrace swivel head, dustproof seal

Wheel:
Materials: Cast iron
Bearing type: Steel roller bearing

AVAILABLE IN Inox 304 STAINLESS STEEL

ART-NO.				Kg
29100CSW	100x50	12x62		500
29125CSW	125x50	12x62		600
29150CSW	150x50	12x62		700
29200CSW	200x50	12x62		800

Swivel Caster

ART-NO.								Kg
29100C	100x50	142	35	115x100x6	72x85	19x10	62x6	500
29125C	125x50	164	39	115x100x6	72x85	19x10	62x6	600
29150C	150x50	190	45	115x100x6	72x85	19x10	62x6	700
29200C	200x50	240	56	115x100x6	72x85	19x10	62x6	700

Fixed Caster

ART-NO.							Kg
29100CF	100x50	142	115x100x6	72x85	19x10	62x6	500
29125CF	125x50	164	115x100x6	72x85	19x10	62x6	600
29150CF	150x50	190	115x100x6	72x85	19x10	62x6	700
29200CF	200x50	240	115x100x6	72x85	19x10	62x6	700

Side Brake Caster

ART-NO.								Kg
29100CB1	100x50	142	35	115x100x6	72x85	19x10	62x6	500
29125CB1	125x50	164	39	115x100x6	72x85	19x10	62x6	600
29150CB1	150x50	190	45	115x100x6	72x85	19x10	62x6	700
29200CB1	200x50	240	56	115x100x6	72x85	19x10	62x6	700

Double Brake Caster

ART-NO.								Kg
29100CB2	100x50	142	35	115x100x6	72x85	19x10	62x6	500
29125CB2	125x50	164	39	115x100x6	72x85	19x10	62x6	600
29150CB2	150x50	190	45	115x100x6	72x85	19x10	62x6	700
29200CB2	200x50	240	56	115x100x6	72x85	19x10	62x6	700

Directional Lock Caster

ART-NO.								Kg
29100CB3	100x50	142	35	115x100x6	72x85	19x10	62x6	500
29125CB3	125x50	164	39	115x100x6	72x85	19x10	62x6	600
29150CB3	150x50	190	45	115x100x6	72x85	19x10	62x6	700
29200CB3	200x50	240	56	115x100x6	72x85	19x10	62x6	700



European type plate is available

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal

Wheel:

Materials: V Groove cast iron
Bearing type: Steel roller bearing

ART-NO.				Kg
29100VSW	100x50	12x62		500
29125VSW	125x50	12x62		600
29150VSW	150x50	12x62		700
29200VSW	200x50	12x62		800

Swivel Caster

ART-NO.								Kg
29100V	100x50	142	35	115x100x6	72x85	19x10	62x6	500
29125V	125x50	164	39	115x100x6	72x85	19x10	62x6	600
29150V	150x50	190	45	115x100x6	72x85	19x10	62x6	700
29200V	200x50	240	56	115x100x6	72x85	19x10	62x6	700

Fixed Caster

ART-NO.							Kg
29100VF	100x50	142	115x100x6	72x85	19x10	62x6	500
29125VF	125x50	164	115x100x6	72x85	19x10	62x6	600
29150VF	150x50	190	115x100x6	72x85	19x10	62x6	700
29200VF	200x50	240	115x100x6	72x85	19x10	62x6	700

Side Brake Caster

ART-NO.							Kg
29100VB1	100x50	142	115x100x6	72x85	19x10	62x6	500
29125VB1	125x50	164	115x100x6	72x85	19x10	62x6	600
29150VB1	150x50	190	115x100x6	72x85	19x10	62x6	700
29200VB1	200x50	240	115x100x6	72x85	19x10	62x6	700

Directional Lock Caster

ART-NO.								Kg
29100VB3	100x50	142	35	115x100x6	72x85	19x10	62x6	500
29125VB3	125x50	164	39	115x100x6	72x85	19x10	62x6	600
29150VB3	150x50	190	45	115x100x6	72x85	19x10	62x6	700
29200VB3	200x50	240	56	115x100x6	72x85	19x10	62x6	700



European type plate is available

Directional Lock

Rainbow zinc is available

29 Heavy duty caster

FLYWHEEL

Housing:

Solid steel welded construction,
zinc plated, double ballrace swivel head,
dustproof seal

Wheel:

Materials: Pneumatic
Bearing type: Double flange bearing
Temperature range: - 5°C~50°C

ART-NO.				Kg
29224PNSW	(8')224x62(2.80/2.50-4)	13x99		120
29260PNSW	(10')260x76.5(4.10/3.50-4)	13x99		150
29300PNSW	(12')300x82(3.50-5)	13x99		200
29400PNSW	(16')400x95(4.00-8)	13x119		230

Swivel Caster

ART-NO.								Kg
29224PN	224x62	257	45	115x100x6	85x72	10x19	100x6	120
29260PN	260x76.5	320	57	115x100x6	85x72	10x19	100x6	150
29300PN	300x82	355	63	115x100x6	85x72	10x19	100x6	200
29400PN	400x95	480	69	115x100x6	85x72	10x19	120x6	230

Fixed Caster

ART-NO.							Kg
29224PNF	224x62	257	115x100x6	85x72	10x19	100x6	120
29260PNF	260x76.5	320	115x100x6	85x72	10x19	100x6	150
29300PNF	300x82	355	115x100x6	85x72	10x19	100x6	200
29400PNF	400x95	480	115x100x6	85x72	10x19	120x6	230



European type plate is available

30 Phenolic heavy duty caster

Housing:
Solid steel welded construction, zinc plated, double ballrace swivel head

Wheel:
3 Types of materials with steel roller bearing is optional.
1, Phenolic
Temperature range:0℃~180℃
2, Phenolic Resin
Temperature range: 0℃~220℃
3, Phenolic Fibre
Temperature range: 0℃~300℃

Wheel options:

6204 Ball bearing
Cast Iron PU wheel
30XXXBCPU

ART-NO.				Kg
30100PFSW	100x50	12x62		200
30125PFSW	125x50	12x62		300
30150PFSW	150x50	12x62		400
30200PFSW	200x50	12x62		500

Swivel Caster

ART-NO.								Kg
30100PF	100x50	142	39	160x114	129x74	25x12	62x6	200
30125PF	125x50	165	45	160x114	129x74	25x12	62x6	300
30150PF	150x50	190	52	160x114	129x74	25x12	62x6	400
30200PF	200x50	257	76	160x114	129x74	25x12	62x6	500

Fixed Caster

ART-NO.							Kg
30100PFF	100x50	142	160x114	129x74	25x12	62x6	200
30125PFF	125x50	165	160x114	129x74	25x12	62x6	300
30150PFF	150x50	190	160x114	129x74	25x12	62x6	400
30200PFF	200x50	257	160x114	129x74	25x12	62x6	500

Directional Lock Caster

ART-NO.								Kg
30100PFB1	100x50	142	39	160x114	129x74	25x12	62x6	200
30125PFB1	125x50	165	45	160x114	129x74	25x12	62x6	300
30150PFB1	150x50	190	52	160x114	129x74	25x12	62x6	400
30200PFB1	200x50	257	76	160x114	129x74	25x12	62x6	500

60 Shock absorber caster

■ Features

- Medium to high capacity .
- Load springs are interchangeable.
- Double row ball bearing raceway construction for strength.
- Heat treated raceway.

Applications:
Loads requiring shock absorbing cart.

Swivel caster

ART-NO.										Kg
BALL BEARING	ROLLER BEARING									
6012550BCPUS	6012550RCPUS	125x50	70x12.7	187.5	113.5	158x114x6	129x74	25x13	6203x2	300
6015050BCPUS	6015050RCPUS	150x50	70x12.7	200	126	158x114x6	129x74	25x13	6203x2	350
6020050BCPUS	6020050RCPUS	200x50	70x12.7	252	177	158x114x6	129x74	25x13	6203x2	450

Fixed caster

ART-NO.									BALL BEARING	Kg
BALL BEARING	ROLLER BEARING									
6012550BCPUF	6012550RCPUF	125x50	70x12.7	187.5	113.5	158x114x6	129x74	25x13	6203x2	300
6015050BCPUF	6015050RCPUF	150x50	70x12.7	200	126	158x114x6	129x74	25x13	6203x2	350
6020050BCPUF	6020050RCPUF	200x50	70x12.7	252	177	158x114x6	129x74	25x13	6203x2	450

Brake caster

ART-NO.									BALL BEARING	Kg
BALL BEARING	ROLLER BEARING									
6012550BCPUB	6012550RCPUB	125x50	70x12.7	187.5	113.5	158x114x6	129x74	25x13	6203x2	300
6015050BCPUB	6015050RCPUB	150x50	70x12.7	200	126	158x114x6	129x74	25x13	6203x2	350
6020050BCPUB	6020050RCPUB	200x50	70x12.7	252	177	158x114x6	129x74	25x13	6203x2	450

■ SPRING SPECIFICATIONS

SPRING SPECIFICATION		
THICKNESS	3/32X5/32	
M. Opening	2"	
M. Deflection	1-1/32 deflection	
Loaded Weight	9/32 deflection	74.844kgs±10%
	25/32 deflection	249.48kgs±10%
Color	Yellow	

► Spring Action（Overall Height）

Unit:mm

TYPE	A (M. Deflection)	B (M. Opening)	Deviation
6"	200	188	12
8"	252	234.2	17.8

► Restricted springs per load-weight

No	Application	Specification			Code	Color	Standard Load(weight)	Remark
		O.D	I.D	L				
1	MediumDuty	⌀40	⌀20	50L	TF	Yellow	90kg	Standard
2	Heavy Duty				TM	Red	220kg	Special Request Only
					TH	Green	480kg	

90 Super heavy duty caster

Housing:

Solid steel welded construction,
double ball bearing housing,black painted

Wheel:

Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20℃~80℃

ART-NO.				Kg
90100BCPUSW	100x50	20x56	6204x2	400
90125BCPUSW	125x50	20x56	6204x2	500
90150BCPUSW	150x50	20x56	6204x2	800
90200BCPUSW	200x50	20x56	6204x2	1000

Swivel Caster

ART-NO.								Kg
90100BCPU	100x50	168	40.7	135x110x12	110/100x80/70	19x12	64x8	400
90125BCPU	125x50	191	46.8	135x110x12	110/100x80/70	19x12	64x8	500
90150BCPU	150x50	216	54	135x110x12	110/100x80/70	19x12	64x8	800
90200BCPU	200x50	266	68.4	135x110x12	110/100x80/70	19x12	64x8	1000

Fixed Caster

ART-NO.							Kg
90100BCPUF	100x50	168	135x110x12	110/100x80/70	19x12	64x8	400
90125BCPUF	125x50	191	135x110x12	110/100x80/70	19x12	64x8	500
90150BCPUF	150x50	216	135x110x12	110/100x80/70	19x12	64x8	800
90200BCPUF	200x50	266	135x110x12	110/100x80/70	19x12	64x8	1000

Wheel options:

Ball bearing
Cast Iron wheel
90xxxBC

Ball bearing
Aluminium Core PU wheel
90xxxBAPU

Ball bearing
Aluminium Core Elastic Rubber wheel
90xxxBABL

91 Super heavy duty caster

Housing:

Solid steel welded construction,
Double ball bearing housing, black painted

Wheel:

Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20°C~80°C

Swivel Caster

ART-NO.										Kg
91125BCPU	125x50	20x56	177	45	149x110x7	120x60 105x80	13	6204x2	64x6	600
91150BCPU	150x50	20x56	202	49	149x110x7	120x60 105x80	13	6204x2	64x6	800
91200BCPU	200x50	20x56	252	54	149x110x7	120x60 105x80	13	6204x2	64x6	1000
91250BCPU	250x50	20x56	303	70	149x110x7	120x60 105x80	13	6205x2	64x6	1200
91300BCPU	300x50	20x56	353	80	149x110x7	120x60 105x80	13	6205x2	64x6	1300

Fixed Caster

ART-NO.									Kg
91125BCPUF	125x50	20x56	177	149x110x6	120x60 105x80	13	6204x2	64x6	600
91150BCPUF	150x50	20x56	202	149x110x6	120x60 105x80	13	6204x2	64x6	800
91200BCPUF	200x50	20x56	252	149x110x6	120x60 105x80	13	6204x2	64x6	1000
91250BCPUF	250x50	20x56	303	149x110x6	120x60 105x80	13	6205x2	64x6	1200
91300BCPUF	300x50	20x56	353	149x110x6	120x60 105x80	13	6205x2	64x6	1300

Rear brake caster

ART-NO.										Kg
91125BCPUB	125x50	20x56	177	45	149x110x7	120x60 105x80	13	6204x2	64x6	600
91150BCPUB	150x50	20x56	202	49	149x110x7	120x60 105x80	13	6204x2	64x6	800
91200BCPUB	200x50	20x56	252	54	149x110x7	120x60 105x80	13	6204x2	64x6	1000
91250BCPUB	250x50	20x56	303	70	149x110x7	120x60 105x80	13	6205x2	64x6	1200
91300BCPUB	300x50	20x56	353	80	149x110x7	120x60 105x80	13	6205x2	64x6	1300

Wheel options:

Ball bearing
Cast Iron wheel
91xxxBC

Ball bearing
Aluminium Core PU wheel
91xxxBAPU

Ball bearing
Aluminium Core Elastic Rubber wheel
91xxxBABL

91TW Super heavy duty twin wheel caster

Housing:

Solid steel welded construction,
Double ball bearing housing, black painted

Wheel:

Materials: Aluminum core polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20°C~80°C

Swivel Caster

ART-NO.										
91150TWABPU	150x50	20x56	225	42	149x110x7.5	170x130 160x120	13	6204x2	64x6	800
91200TWABPU	200x50	20x56	270	50	149x110x7.5	170x130 160x120	13	6204x2	64x6	1000
91250TWABPU	250x60	20x56	365	82	149x110x7.5	230x210 210x160	17	6205x2	64x6	1200
91300TWABPU	300x70	20x56	415	93	149x110x7.5	230x210 210x160	17	6205x2	64x6	1400

Fixed Caster

ART-NO.									
91150TWABPUF	150x50	20x56	225	175x150x7.5	170x130 160x120	13	6204x2	64x6	800
91200TWABPUF	200x50	20x56	270	175x150x7.5	170x130 160x120	13	6204x2	64x6	1000
91250TWABPUF	250x60	20x56	365	175x150x7.5	230x210 210x160	17	6205x2	64x6	1200
91300TWABPUF	300x70	20x56	415	175x150x7.5	230x210 210x160	17	6205x2	64x6	1400

92TW Cast iron polyurethane super heavy duty twin wheel caster

Housing:

Solid steel welded construction,
Double ball bearing housing, black painted

Wheel:

Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearing
Temperature range: -20°C~80°C

Swivel Caster

ART-NO.										
92150TWBCPU	150x50	20x56	212	55	175x140x14	140x105	14	6204x2	64x12	1100
92200TWBCPU	200x50	20x56	264	67	175x140x14	140x105	14	6205x2	64x12	1300
92250TWBCPU	250x50	20x56	314	80	175x140x14	140x105	14	6205x2	64x12	2000

Fixed Caster

ART-NO.									
92150TWBCPUF	150x50	20x56	212	175x140x14	140x105	14	6204x2	64x12	1100
92200TWBCPUF	200x50	20x56	264	175x140x14	140x105	14	6205x2	64x12	1300
92250TWBCPUF	250x50	20x56	314	175x140x14	140x105	14	6205x2	64x12	2000

Scaffolding caster

31XXXB

31XXXCPUB

31XXXPUB

ART-NO.									
MOLD ON RUBBER	CAST IRON PU	PU ON PP							
31125B	31125CPUB	31125PUB	125x50	19x60	164	50	63x6	35x100	150
31150B	31150CPUB	31150PUB	150x50	19x60	190	50	63x6	35x100	200
31200B	31200CPUB	31200PUB	200x50	19x60	240	50	63x6	35x100	250

29XXXSB2

29XXXCPUSB2

29XXXPUSB2

29XXXTPRSB2

ART-NO.										
MOLD ON RUBBER	CAST IRON PU	PU ON PP	TPR							
29100SB2	29100CPUSB2	29100PUSB2	29100TPRSB2	100x50	19x60	142	35	62x6	38x100	120
29125SB2	29125CPUSB2	29125PUSB2	29125TPRSB2	125x50	19x60	164	39	62x6	38x100	150
29150SB2	29150CPUSB2	29150PUSB2	29150TPRSB2	150x50	19x60	190	45	62x6	38x100	200
29200SB2	29200CPUSB2	29200PUSB2	29200TPRSB2	200x50	19x60	240	56	62x6	38x100	250

29XXXPUNYHPB2

29XXXNYHPB2

ART-NO.										
PU ON NYLON	NYLON									
		PU ON NYLON	NYLON	PU ON NYLON	NYLON					
29200PUNYHPB2	29200NYHPB2	204x50	202x45	20x60	20x58	240	56	62x6	59x100	400

Scaffolding caster

Housing:
Double brake fitting housing,zinc plated,
Head treated double ballrace with hardened steel balls make the caster swivel smoothly under big load
PU coated brake pedal protect shoes well
Static load capacity can reach 800kgs

Wheel:
PU on nylon wheel,plain bearing
Nylon wheel,plain bearing
PU Hardness: 95±3 Shore A

32XXXPUNYS

32XXXPUNY

32XXXNYS

32XXXNY

Material												Static Kg
PU on nylon	32200PUNYS	32200PUNY	200x50	12x61	243	40	63x4	38x100	135x110	105x77.5	13.6x11	800
Nylon	32200NYS	32200NY	200x50	12x61	241	40	63x4	38x100	135x110	105x77.5	13.6x11	800

Housing:
Pressed steel housing,zinc plated,
double ballrace swivel head

Wheel:
Plain bearing mold on rubber
Hardness: 85±3 Shore A


52XXXS

52XXXHS

52XXXHPS

												Static Kg
52160S	52160HS	52160HPS	160x45	19x61	195	47	63x3.5	35x100	59x100	60x40	35x100	500
52200S	52200HS	52200HPS	200x45	19x61	245	47	63x3.5	35x100	59x100	60x40	35x100	600

Cast Iron Polyurethane Pallet Wheel

Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Double ball bearing
Temperature range: -20°C ~80°C
Diameter range:70-200mm
Standard colour: Red
Brown,orange,yellow,green also available

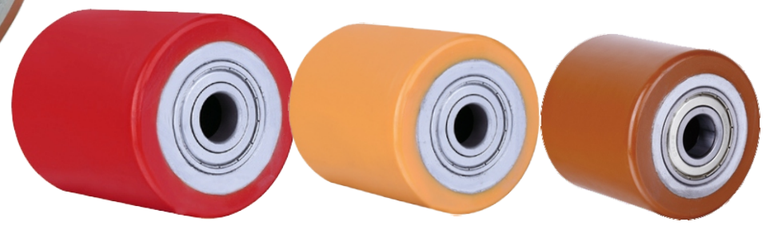

ART-NO.							Kg
07058BPSW	70	58	58	47	20	6204x2	300
07060BPSW	70	60	60	47	20	6204x2	300
07070BPSW	70	70	70	47	20	6204x2	300
07080BPSW	70	80	80	47	20	6204x2	300
07634BPSW	76	34	34	32	12	6201x2	350
08030BPSW	80	30	30	47	20	6204x2	400
08040BPSW	80	40	40	47	20	6204x2	400
08050BPSW	80	50	50	47	20	6204x2	450
08060BPSW	80	60	60	47	20	6204x2	500
08070BPSW	80	70	70	47	20	6204x2	600
08075BPSW	80	75	75	47	20	6204x2	600
08080BPSW	80	80	80	47	20	6204x2	700
08085BPSW	80	85	85	47	20	6204x2	700
08090BPSW	80	90	90	47	20	6204x2	800
08095BPSW	80	95	95	47	20	6204x2	800
080100BPSW	80	100	100	47	20	6204x2	850
08560BPSW	85	60	60	47	20	6204x2	500
08570BPSW	85	70	70	47	20	6204x2	700
08575BPSW	85	75	75	47	20	6204x2	750
08580BPSW	85	80	80	47	20	6204x2	800
08590BPSW	85	90	90	47	20	6204x2	850
085100BPSW	85	100	100	47	20	6204x2	1000
10032BPSW	100	32	32	35	15	6202x2	200
13040BPSW	130	40	40	40	17	6203x2	300
15040BPSW	150	40	40	47	20	6204x2	350
15050BPSW	150	50	50	47	20	6204x2	350
18050BPSW	180	50	50	47	20	6204x2	700
20050BPSW	200	50	50	47	20	6204x2	1000

Cast Iron Polyurethane Wheel

Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearings
Temperature range: -20°C～80°C
Diameter range:75-250mm
Standard colour: Yellow
Brown,orange,red,green also available

ART-NO.						Kg
EPCPU07532SW	75	32	37	11.2		200
EBCPU10030SW-6200-39	100	30	39	10	6200x2	350
EBCPU10032SW-6202-32	100	32	32	15	6202x2	350
EBCPU10038SW-6002-38	100	38	38	15	6002x2	350
EBCPU10038SW-6204-41	100	38	41	20	6204x2	350
EBCPU10050SW-6003-56	100	50	56	17	6003x2	380
EBCPU10050SW-6204-56	100	50	56	20	6204x2	400
EBCPU10050SW-6204-60	100	50	60	20	6204x2	400
EBCPU12530SW-6200-30	125	30	30	10	6200x2	400
EBCPU12538SW-6002-38	125	38	38	15	6002x2	400
EBCPU12538SW-6204-41	125	38	41	20	6204x2	400
EBCPU12550SW-6003-56	125	50	56	17	6003x2	600
EBCPU12550SW-6204-56	125	50	56	20	6204x2	600
EBCPU12550SW-6204-60	125	50	60	20	6204x2	600
EBCPU15038SW-6002-41	150	38	41	15	6002x2	450
EBCPU15050SW-6003-56	150	50	56	17	6003x2	700
EBCPU15050SW-6204-56	150	50	56	20	6204x2	700
EBCPU15050SW-6204-60	150	50	60	20	6204x2	700
EBCPU15075SW-6204-83	150	75	83	20	6204x2	700
EBCPU20050SW-6204-56	200	50	56	20	6204x2	900
EBCPU20050SW-6204-60	200	50	60	20	6204x2	900
EBCPU20070SW-6205-78	200	70	78	25	6205x2	900
EBCPU20075SW-6205-83	200	75	83	25	6205x2	1200
EBCPU25050SW-6205-60	250	50	60	25	6205x2	945
EBCPU25075SW-6205-83	250	75	83	25	6205x2	1350

Cast Iron Polyurethane Wheel

Materials: Cast iron polyurethane with ribs
Hardness: 90±5 Shore A
Bearing type: Precision double ball bearings
Temperature range: -20°C～80°C
Diameter range:100-400mm
Standard colour: Orange
Brown,red,yellow,green also available

ART-NO.						Kg
BCPU10038SW-6203	100	38	42	17	6203x2	350
BCPU10038SW-6204	100	38	42	20	6204x2	350
BCPU10050SW-6203	100	50	56	17	6203x2	400
BCPU10050SW-6204	100	50	56	20	6204x2	400
BCPU12538SW-6203	125	38	42	17	6203x2	400
BCPU12538SW-6204	125	38	42	20	6204x2	400
BCPU12550SW-6203	125	50	56	17	6203x2	500
BCPU12550SW-6204	125	50	56	20	6204x2	500
BCPU15038SW-6203	150	38	42	17	6203x2	500
BCPU15038SW-6204	150	38	42	20	6204x2	500
BCPU15050SW-6203	150	50	56	17	6203x2	700
BCPU15050SW-6204	150	50	56	20	6204x2	700
BCPU20050SW-6203	200	50	56	17	6203x2	1100
BCPU20050SW-6204	200	50	56	20	6204x2	1100
BCPU20063SW-6204	200	63	70	20	6204x2	1200
BCPU20075SW-6204	200	75	82	20	6204x2	1400
BCPU25050SW-6205	250	50	56	25	6205x2	1300
BCPU25063SW-6205	250	63	70	25	6205x2	1300
BCPU25075SW-6205	250	75	82	25	6205x2	1800
BCPU30063SW-6205	300	63	70	25	6205x2	1400
BCPU30075SW-6205	300	75	83	25	6205x2	2000
BCPU40075SW-6205	400	75	83	25	6205x2	4500

Cast Iron Polyurethane Wheel

Materials: Cast iron polyurethane
Hardness: 90±5 Shore A
Bearing type: Steel roller bearing
Temperature range: -20°C～80°C
Diameter range:75-400mm
Standard colour: Red
Brown,orange,yellow,green also available

ART-NO.							Kg
PCPU07525SW-38	75	25	38	15/16	12.7		300
RCPU07532SW-42	75	32	42	30	10		150
RCPU07550SW-62	75	50	62	30	13		200
RCPU08238SW-41	82	38	41	30	13		450
RCPU08250SW-62	82	50	62	30	13		600
RCPU10038SW-42	100	38	42	30	13		250
RCPU10038SW-48	100	38	48	30	13		250
RCPU10050SW-62	100	50	62	30	13		360
RCPU12538SW-42	125	38	42	30	8/10		330
RCPU12538SW-48	125	38	48	30	13		330
RCPU12550SW-62	125	50	62	30	13		540
RCPU15038SW-48	150	38	48	30	13		330
RCPU15050SW-62	150	50	62	30	13		560
RCPU15063SW-69	150	63	69	49	19		1600
RCPU15075SW-82	150	75	82	49	19		2000
RCPU20050SW-62	200	50	62	30	13		670
RCPU20063SW-69	200	63	69	49	13/19		900
RCPU20075SW-69	200	75	69	49	19		1125
RCPU25050SW-62	250	50	62	30	13		1600
RCPU25063SW-69	250	63	69	30/49	13/19		945
RCPU25063SW-82	250	63	82	49	19		2000
RCPU25075SW-82	250	75	82	49	19		1350
RCPU250100SW-114	250	100	114	49	19		4700
RCPU250100SW-107	250	100	107	49	19		5500
RCPU30063SW-69	300	63	69	49	19		990
RCPU30063SW-82	300	63	82	49	19		2400
RCPU30075SW-80	300	75	80	49	19		1500
RCPU300100SW-107	300	100	107	62	19		6000
RCPU40075SW-82	400	75	82	49	19		4500

Cast Iron Wheel



Materials: Cast iron
Bearing type: Steel roller bearing
Diameter range:100-300mm
Colour: Sliver and black and so on

ART-NO.							Kg
C10038RSW	100	38	41	30	12.7		290
C10038RSW	100	38	45	20	12.7		300
C10050RSW	100	50	55	30	12.7		450
C12538RSW	125	38	55	30	12.7		300
C12550RSW	125	50	55	30	12.7		450
C15038RSW	150	38	41	30	12.7		330
C15045RSW	150	45	60	31.5	12.7		600
C15050RSW	150	50	55	49	12.7		600
C15050RSW	150	63	69	49	19		1125
C15075RSW	150	75	82	49	19		1125
C20045RSW	200	45	60	31.5	12.7		1100
C20050RSW	200	50	55	30	12.7		630
C20063RSW	200	63	69	49	19		1125
C20075RSW	200	75	82	49	19		1125
C25054RSW	250	54	60	36.5	12.7		1400
C25063RSW	250	63	69	49	19		1200
C25075RSW	250	75	82	49	19		1200
C30063RSW	300	63	69	49	19		1125
C30075RSW	300	75	82	49	19		1125

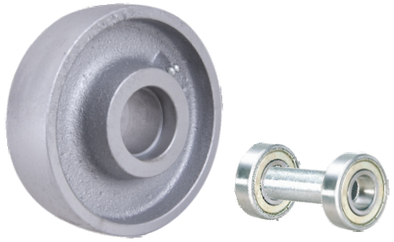

Materials: Cast iron
Bearing type: Precision double ball bearings
Diameter range:125-250mm
Colour: Sliver and black and so on

ART-NO.							Kg
C12540BSW	125	40	60	47	20	6204x2	500
C15040BSW	150	40	60	47	20	6204x2	600
C15045BSW	150	45	60	47	20	6204x2	700
C16045BSW	160	45	60	47	20	6204x2	800
C16050BSW	160	50	60	47	20	6204x2	800
C20045BSW	200	45	60	47	20	6204x2	1100
C25050BSW	250	50	60	52	20	6205x2	1200
C25054BSW	250	54	60	52	20	6205x2	1400

Special Wheel

FLYWHEEL

Mold on rubber ball bearing single wheel

ART-NO.				Kg
100-32-2	100x32	17x33	6203x2	165
125-32-2	125x32	17x33	6203x2	165
150-32-1	150x32	17x20	6203	145
150-40-1	150x40	25x25	6205	215
150-50-2	150x50	25x44	6205x2	350
200-45-1	200x45	25x25	6205	300
200-50-2	200x50	25x40	6205x2	350
250-50-2	250x50	25x40	6205x2	500

Rubber ladder wheel

ART-NO.							BEARING OF HOUSING	Kg
LW150	150x40	20x55	367	207	25	180		110
LW160	160x40	20x55	367	207	25	180		130

Rubber ladder wheel

ART-NO.							BEARING OF HOUSING	Kg
LWPH125	125x34	15x44	332	207	25	180		110
LWPH160	160x40	20x55	367	207	25	180		130

Black rubber ball bearing single wheel

ART-NO.				Kg
32160RB	160x40	17x15	6203x2	130
32200RB	200x46	25x18	6205x2	150
32250RB	250x50	25x18	6205x2	180

Floor Lock-Lift up

Warehouse trolley,work benches,stock trolleys
A simple pedal on pedal off mechanism ensures trouble-free operation







ART-NO.	For caster size	Mounting height	H1	H2	S	L	H	H3	H4				Kg
900-2	4"/100mm	148	155	125	30	142	1.5	70	50	120x120	100x100	11	200
900-3	5"/125mm	176	183	153	30	142	1.5	70	50	120x120	100x100	11	200
900-4	6"/150mm	204	211	168	36	142	1.5	70	50	120x120	100x100	11	300
900-6	8"/200mm	251	258	215	36	142	3.5	70	50	120x120	100x100	11	300

Furniture caster

FLYWHEEL

TWPXX TWPBXX TWTXX TWTBXX TWSSXX TWSSBXX TWRSXX TWRSBXX

Nylon Furniture Caster

																Kg
TWP30		TWT30		TWSS30		TWRS30		30x33	43	30x30	21x21	4	7x19.5	8x15	6x25	15
TWP40	TWPB40	TWT40	TWTB40	TWSS40	TWSSB40	TWRS40	TWRSB40	40x38	54	38x38	26x26	5	11x22	8x15	8x38	20
TWP50	TWPB50	TWT50	TWTB50	TWSS50	TWSSB50	TWRS50	TWRSB50	50x45	65	38x38	26x26	5	11x22	10x15	8x38	25

CWXXL CWBXXL CWXXS CWBXXS CWXXU CWBXXU

U channel nylon caster

											Kg
CW40L	CWB40L	CW40S	CWB40S			40x40	55	40x16x20	23x22x32		25
				CW50U	CWB50U	50x46	62			40x20x32	35

COXXP COXXR COXXT COXXS COXXPPU COXXRPU COXXTPU COXXSPU

Nylon Chair Caster

																	Kg
C050P	C050R	C050T	C050S	C050PPU	C050RPU	C050TPU	C050SPU	50x46	50x56	60	38x38	26x26	5	11x22	10x15	8x38	35

NRS050PU NRSB050PU TRS050 TRS050PU

Nylon Furniture Caster

							Kg
NRS050PU	NRSB050PU	TRS050	TRS050PU	50	78	11x22	25

Furniture caster

CT316 CT316T CT316S CT316PU CT316TPU CT316SPU

Nylon Chair Caster

CT316	CT316T	CT316S	CT316PU	CT316TPU	CT316SPU	50x54	62	11x22	10x15	8x38	35

BH050 BH050PU BH050PU BH050PU

Nylon bread hood caster

BH050	BH050PU	BH050PU	BH050PU	50x66	50x68	65	11x22	35

NHPXX-SP NHPBXX-SP NHTXX-SP NHTBXX-SP NHSXX-SP NHSBXX-SP NHRSXX-SP NHRSBXX-SP

Unhooded Nylon Furniture Caster

NHP50-SP	NHPB50-SP	NHT50-SP	NHTB50-SP	NHS50-SP	NHSB50-SP	NHRS50-SP	NHRSB50-SP	50x46	57	38x38x2	26x26	5	10x15	8x38	11x22	35
NHP60-SP	NHPB60-SP	NHT60-SP	NHTB60-SP	NHS60-SP	NHSB60-SP	NHRS60-SP	NHRSB60-SP	60x50	67	38x38x2	26x26	5	10x15	8x38	11x22	45

CTXXX CTXXXC CTRSXXX

Bed nylon caster

CT055	CT055C	55	38	38x38	28x28	5	30
CT065	CT065C	65	39	38x38	28x28	5	50

Carper nylon caster

CTRS325	40	15	10x15	15
CTRS330	50	22	11x22	25

Furniture caster

BPXX BTXX BSXX BPXXC BTXXC BSXXC BPXXPVC BTXXPVC BSXXPVC BPCXXPVC BTCXXPVC BSCXXPVC

Rubber / PVC Ball Caster

BP40	BT40	BS40	BP40C	BT40C	BS40C	BP40PVC	BT40PVC	BS40PVC	BPC40PVC	BTC40PVC	BSC40PVC	40	55	38x38	28x28	5	8x15	8x38	20
BP40	BT50	BS50	BP50C	BT50C	BS50C	BP50PVC	BT50PVC	BS50PVC	BPC50PVC	BTC50PVC	BSC50PVC	50	65	38x38	28x28	5	10x15	8x38	25

B50 B50B B50C B50CB

Plastic Bed Caster

B50	B50B	B50C	B50CB	50x55	5x59	68	8x40	61x3	50

81XXX

Conveyer Caster

81025	25.4	69x50.4x1.2	56	5.7	31.7	30

Flower stand caster

FS030	30x13	184	53	49.2	11	8	17x1.2	50

11 Stainless steel industrial caster

FLYWHEEL

Housing:
Made of pressed stainless steel,
double ballrace swivel head

Wheel:
Materials: Nylon
Bearing tye: Plain bearing
Temperature range: -15°C~80°C

ART-NO.				Kg
11075NYSW	75x23	8x32	-- -- --	60
11080NYSW	80x30	12x41		120
11100NYSW	100x32	10x41		200
11125NYSW	125x32	10x41		250

Swivel Caster

ART-NO.								Kg
11075SSNY	75x23	97	32	84x72	62x50	11x8.5	32x2	60
11080SSNY	80X30	108	35	102x84	80x60	14x9	42x2	100
11100SSNY	100x32	130	37	102x84	80x60	14x9	42x2	120
11125SSNY	125x32	155	35	102x84	80x60	14x9	42x2	150

Fixed Caster

ART-NO.							Kg
11075SSNYF	75x23	97	84x72	62x50	11x8.5	32x2	60
11080SSNYF	80X30	108	102x84	80x60	14x9	42x2	100
11100SSNYF	100x32	130	102x84	80x60	14x9	42x2	120
11125SSNYF	125x32	155	102x84	80x60	14x9	42x2	150

Double Brake Caster

ART-NO.								Kg
11075SSNYB	75x23	97	32	84x72	62x50	11x8.5	32x2	60
11080SSNYB	80X30	108	35	102x84	80x60	14x9	42x2	100
11100SSNYB	100x32	130	38	102x84	80x60	14x9	42x2	120
11125SSNYB	125x32	155	33	102x84	80x60	14x9	42x2	150

Bolt Hole Swivel Caster

ART-NO.						Kg
11075SSNYD	75x23	96	32	10.5	32x2	60
11080SSNYD	80X30	106	35	12.5	42x2	100
11100SSNYD	100x32	128	37	12.5	42x2	120
11125SSNYD	125x32	152	35	12.5	42x2	150

Bolt Hole Double Brake Caster

ART-NO.						Kg
11075SSNYDB	75x23	96	32	10.5	32x2	60
11080SSNYDB	80X30	106	35	12.5	42x2	100
11100SSNYDB	100x32	128	38	12.5	42x2	120
11125SSNYDB	125x32	152	33	12.5	42x2	150

11 Stainless steel industrial caster

FLYWHEEL

Housing:
Made of pressed stainless steel,
double ballrace swivel head

Wheel:
Materials: Polyurethane on nylon
Hardness: 90±5 Shore A
Bearing type: Stainless steel plain bearing
Temperature range: -5°C~80°C

ART-NO.				Kg
11080PUNYSW	80x30	12x41		100
11100PUNYSW	100x30	12x41		120
11125PUNYSW	125x30	15x41		150

Swivel Caster 平板活动脚轮

ART-NO.								Kg
11080SSPUNY	80x30	108	35	102x84	80x60	14x9	42x2	100
11100SSPUNY	100x30	130	37	102x84	80x60	14x9	42x2	120
11125SSPUNY	125x30	155	35	102x84	80x60	14x9	42x2	150

Fixed Caster

ART-NO.							Kg
11080SSPUNYF	80x30	108	102x84	80x60	14x9	42x2	100
11100SSPUNYF	100x30	130	102x84	80x60	14x9	42x2	120
11125SSPUNYF	125x30	155	102x84	80x60	14x9	42x2	150

Double Brake Caster

ART-NO.								Kg
11080SSPUNYB	80x30	108	35	102x84	80x60	14x9	42x2	100
11100SSPUNYB	100x30	130	38	102x84	80x60	14x9	42x2	120
11125SSPUNYB	125x30	155	35	102x84	80x60	14x9	42x2	150

Bolt Hole Swivel Caster

ART-NO.						Kg
11080SSPUNYD	80x30	106	35	12.5	42x2	100
11100SSPUNYD	100x30	128	37	12.5	42x2	120
11125SSPUNYD	125x30	152	35	12.5	42x2	150

Bolt Hole Double Brake Caster

ART-NO.						Kg
11080SSPUNYDB	80x30	106	35	12.5	42x2	100
11100SSPUNYDB	100x30	128	38	12.5	42x2	120
11125SSPUNYDB	125x30	152	33	12.5	42x2	150

28 Stainless steel medium duty caster

FLYWHEEL

Housing:
Made of pressed stainless steel,
double ballrace swivel head
Transparent nylon dustproof seal

Wheel:
Materials: Nylon
Bearing tye: Plain bearing
Temperature range: -15℃~80℃

ART-NO.				Kg
28075NYSW	75x27	10x40		150
28100NYSW	100x32	10x40		200
28125NYSW	125x32	10x40		250

Swivel Caster

ART-NO.								Kg
28075SSNY	75x27	104	71.5	95x67x3	73x45	11x8.5	41x2.5	120
28100SSNY	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	150
28125SSNY	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

Fixed Caster

ART-NO.								Kg
28075SSNYF	75x27	104	95x67	73x45	11x8.5	41x2.5	120
28100SSNYF	100x32	132	95x67	73x45	11x8.5	41x2.5	150
28125SSNYF	125x32	158	95x67	73x45	11x8.5	41x2.5	180

Side Brake Caster

ART-NO.								Kg
28075SSNYB1	75x27	104	71.5	95x67x3	73x45	11x8.5	41x2.5	120
28100SSNYB1	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	150
28125SSNYB1	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075SSNYB2	75x27	104	71.5	95x67x3	73x45	11x8.5	41x2.5	120
28100SSNYB2	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	150
28125SSNYB2	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075SSNYB3	75x27	104	71.5	95x67x3	73x45	11x8.5	41x2.5	120
28100SSNYB3	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	150
28125SSNYB3	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	180

28 Stainless steel medium duty caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
28075SSNYD	75x27	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	120
28100SSNYD	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	150
28125SSNYD	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Bolt Hole Side Brake Caster

ART-NO.								Kg
28075SSNYDB1	75x27	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	120
28100SSNYDB1	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	150
28125SSNYDB1	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075SSNYDB2	75x27	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	120
28100SSNYDB2	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	150
28125SSNYDB2	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Bolt Hole Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075SSNYDB3	75x27	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	120
28100SSNYDB3	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	150
28125SSNYDB3	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	180

Other fittings

Hexagonal Subtense S=17mm



Swivel---28XXXSSNYT
Side brake---28XXXSSNYTB1
Brake---28XXXSSNYTB2
Brake, nylon pedal---28XXXSSNYTB3



Swivel---28XXXSSNYS
Side brake---28XXXSSNYSB1
Brake---28XXXSSNYSB2
Brake, nylon pedal---28XXXSSNYSB3



European type plate is available

Separated rigid
28XXXSSNYF2

28 Stainless steel medium duty caster

FLYWHEEL

Housing:
Made of pressed stainless steel,
double ballrace swivel head
transparent dustproof seal

Wheel:
Materials: Polyurethane
Hardness: 90±5 Shore A
Bearing type: Stainless steel plain bearing
Temperature range: -5°C~80°C

ART-NO.				Kg
28075PPUSW	75x32	8x41		60
28100PPUSW	100x32	8x41		80
28125PPUSW	125x32	8x41		100

Swivel Caster

ART-NO.								Kg
28075SSPPU	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	60
28100SSPPU	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	80
28125SSPPU	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	100

Fixed Caster

ART-NO.								Kg
28075SSPPUF	75x32	104	95x67	73x45	11x8.5	41x2.5	60
28100SSPPUF	100x32	132	95x67	73x45	11x8.5	41x2.5	80
28125SSPPUF	125x32	158	95x67	73x45	11x8.5	41x2.5	100

Side Brake Caster

ART-NO.								Kg
28075SSPPUB1	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	60
28100SSPPUB1	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	80
28125SSPPUB1	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	100

Double Brake Caster

ART-NO.								Kg
28075SSPPUB2	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	60
28100SSPPUB2	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	80
28125SSPPUB2	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	100

Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075SSPPUB3	75x32	104	71.5	95x67x3	73x45	11x8.5	41x2.5	60
28100SSPPUB3	100x32	132	84	95x67x3	73x45	11x8.5	41x2.5	80
28125SSPPUB3	125x32	158	96.5	95x67x3	73x45	11x8.5	41x2.5	100

28 Stainless steel medium duty caster

FLYWHEEL

Bolt Hole Swivel Caster

ART-NO.								Kg
28075SSPPUD	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	60
28100SSPPUD	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	80
28125SSPPUD	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	100

Bolt Hole Side Brake Caster

ART-NO.								Kg
28075SSPPUDB1	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	60
28100SSPPUDB1	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	80
28125SSPPUDB1	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	100

Bolt Hole Double Brake Caster,Steel Pedal

ART-NO.								Kg
28075SSPPUDB2	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	60
28100SSPPUDB2	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	80
28125SSPPUDB2	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	100

Bolt Hole Double Brake Caster,Nylon Pedal

ART-NO.								Kg
28075SSPPUDB3	75x32	101	71.5	41x2.5	12/12.7	12/1/2"x25	28x40	60
28100SSPPUDB3	100x32	129	84	41x2.5	12/12.7	12/1/2"x25	28x40	80
28125SSPPUDB3	125x32	155	96.5	41x2.5	12/12.7	12/1/2"x25	28x40	100

Other fittings

Hexagonal Subtense S=17mm



Swivel---28XXXSSPPUT
Side brake---28XXXSSPPUTB1
Brake---28XXXSSPPUTB2
Brake, nylon pedal---28XXXSSPPUTB3



Swivel---28XXXSSPPUS
Side brake---28XXXSSPPUSB1
Brake---28XXXSSPPUSB2
Brake, nylon pedal---28XXXSSPPUSB3



European type plate is available

Separated rigid
28XXXSSPPUF2

29 Stainless steel heavy duty caster

Housing:
Solid stainless steel welded construction, double ballrace swivel head

Wheel:
Materials: Plastic core polyurethane
Hardness: 90±5 Shore A
Bearing type: Stainless steel roller bearing
Temperature range: -5°C~ 80°C

Swivel Caster

ART-NO.									Kg
29100SSPU	100x50	19x60	142	35	115x100x6	72x85	19x10	62x6	120
29125SSPU	125x50	19x60	164	39	115x100x6	72x85	19x10	62x6	210
29150SSPU	150x50	19x60	190	45	115x100x6	72x85	19x10	62x6	220
29200SSPU	200x50	19x60	240	56	115x100x6	72x85	19x10	62x6	245

Fixed Caster

ART-NO.								Kg
29100SSPUF	100x50	19x60	142	115x100x6	72x85	19x10	62x6	120
29125SSPUF	125x50	19x60	164	115x100x6	72x85	19x10	62x6	210
29150SSPUF	150x50	19x60	190	115x100x6	72x85	19x10	62x6	220
29200SSPUF	200x50	19x60	240	115x100x6	72x85	19x10	62x6	245

Side Brake Caster

ART-NO.									Kg
29100SSPUB1	100x50	19x60	142	35	115x100x6	72x85	19x10	62x6	120
29125SSPUB1	125x50	19x60	164	39	115x100x6	72x85	19x10	62x6	210
29150SSPUB1	150x50	19x60	190	45	115x100x6	72x85	19x10	62x6	220
29200SSPUB1	200x50	19x60	240	56	115x100x6	72x85	19x10	62x6	245

Wheel:
Materials: Nylon
Bearing type: Stainless steel roller bearing
Temperature range: -15°C~80°C

Swivel Caster

ART-NO.									Kg
2910045SSRNY	100x45	17x53	142	35	115x100x6	72x85	19x10	62x6	500
2912545SSRNY	125x45	17x53	164	39	115x100x6	72x85	19x10	62x6	700
2915045SSRNY	150x45	17x53	190	45	115x100x6	72x85	19x10	62x6	700
2920045SSRNY	200x45	17x53	240	56	115x100x6	72x85	19x10	62x6	700

Fixed Caster

ART-NO.								Kg
2910045SSRNYF	100x45	17x53	142	115x100x6	72x85	19x10	62x6	500
2912545SSRNYF	125x45	17x53	164	115x100x6	72x85	19x10	62x6	700
2915045SSRNYF	150x45	17x53	190	115x100x6	72x85	19x10	62x6	700
2920045SSRNYF	200x45	17x53	240	115x100x6	72x85	19x10	62x6	700

Side Brake Caster

ART-NO.									Kg
2910045SSRNYB1	100x45	17x53	142	35	115x100x6	72x85	19x10	62x6	500
2912545SSRNYB1	125x45	17x53	164	39	115x100x6	72x85	19x10	62x6	700
2915045SSRNYB1	150x45	17x53	190	45	115x100x6	72x85	19x10	62x6	700
2920045SSRNYB1	200x45	17x53	240	56	115x100x6	72x85	19x10	62x6	700

Nylon Expanding Stem For Furniture Caster,Pipe Racking

Expander-Round for M10/M12 axle

ART. M10	ART. M12	⌀D	⌀Interno	LI	L2
EXP-R19M10	EXP-R19M12	19	19-21	46	53
EXP-R22M10	EXP-R22M12	22	22-23	46	53
EXP-R24M10	EXP-R24M12	24	24-26	46	53
EXP-R27M10	EXP-R27M12	27	27-29	46	53
EXP-R30M10	EXP-R30M12	30	30-32	46	53

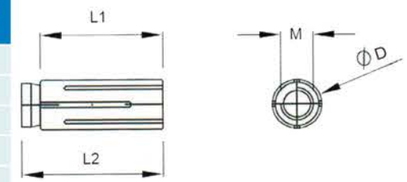

Expander-Square for M10/M12 axle

ART. M10	ART. M12	⌀D	⌀Interno	LI	L2
EXP-Q20M10	EXP-Q20M12	20	20-21.5	46	53
EXP-Q22M10	EXP-Q22M12	22	22-24	46	53
EXP-Q25M10	EXP-Q25M12	25	25-27	46	53
EXP-Q30M10	EXP-Q30M12	30	30-32	46	53
EXP-Q36M10	EXP-Q36M12	36	36-38	46	53

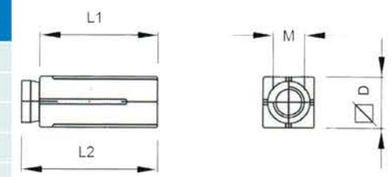

Expander-Round with axle (M10/M12)

ART. M10	ART. M12	⌀D	⌀Interno	LI	L2	AL
EXP-RA19M10	EXP-RA19M12	19	19-21	46	53	80
EXP-RA22M10	EXP-RA22M12	22	22-23	46	53	80
EXP-RA24M10	EXP-RA24M12	24	24-26	46	53	80
EXP-RA27M10	EXP-RA27M12	27	27-29	46	53	80
EXP-RA30M10	EXP-RA30M12	30	30-32	46	53	80

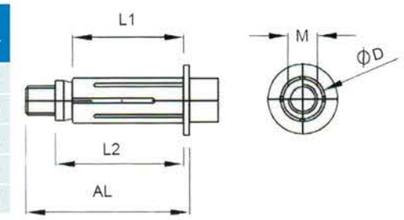

Expander-Square with axle (M10/M12)

ART. M10	ART. M12	⌀D	⌀Interno	LI	L2	AL
EXP-QA20M10	EXP-QA20M12	20	20-21.5	46	53	80
EXP-QA22M10	EXP-QA22M12	22	22-24	46	53	80
EXP-QA25M10	EXP-QA25M12	25	25-27	46	53	80
EXP-QA30M10	EXP-QA30M12	30	30-32	46	53	80
EXP-QA36M10	EXP-QA36M12	36	36-38	46	53	80

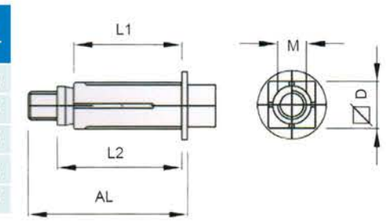

EXP-R19

EXP-R22

EXP-R27

Inner hole: M12

Inner hole: M10

Certificate

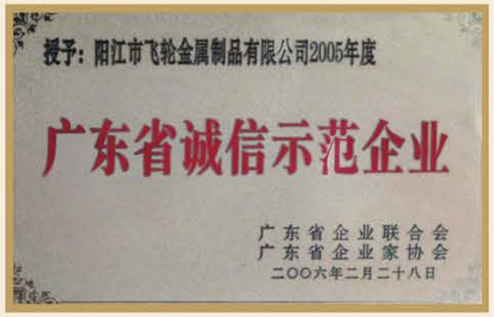

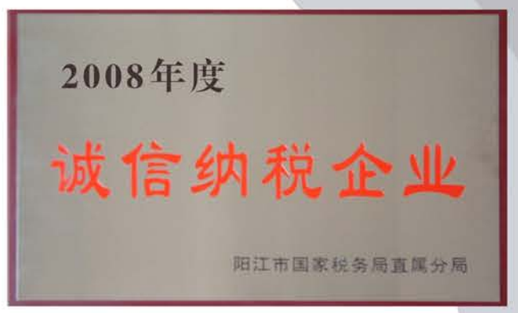

Government officers visit our company

Enterprise Culture